


# HBLTC4-1W-7ALN+

## RF Balun Transformer




50Ω 1: 4CT Flux Coupled Transformer 3-800 MHz


### Outline Drawing(mm)

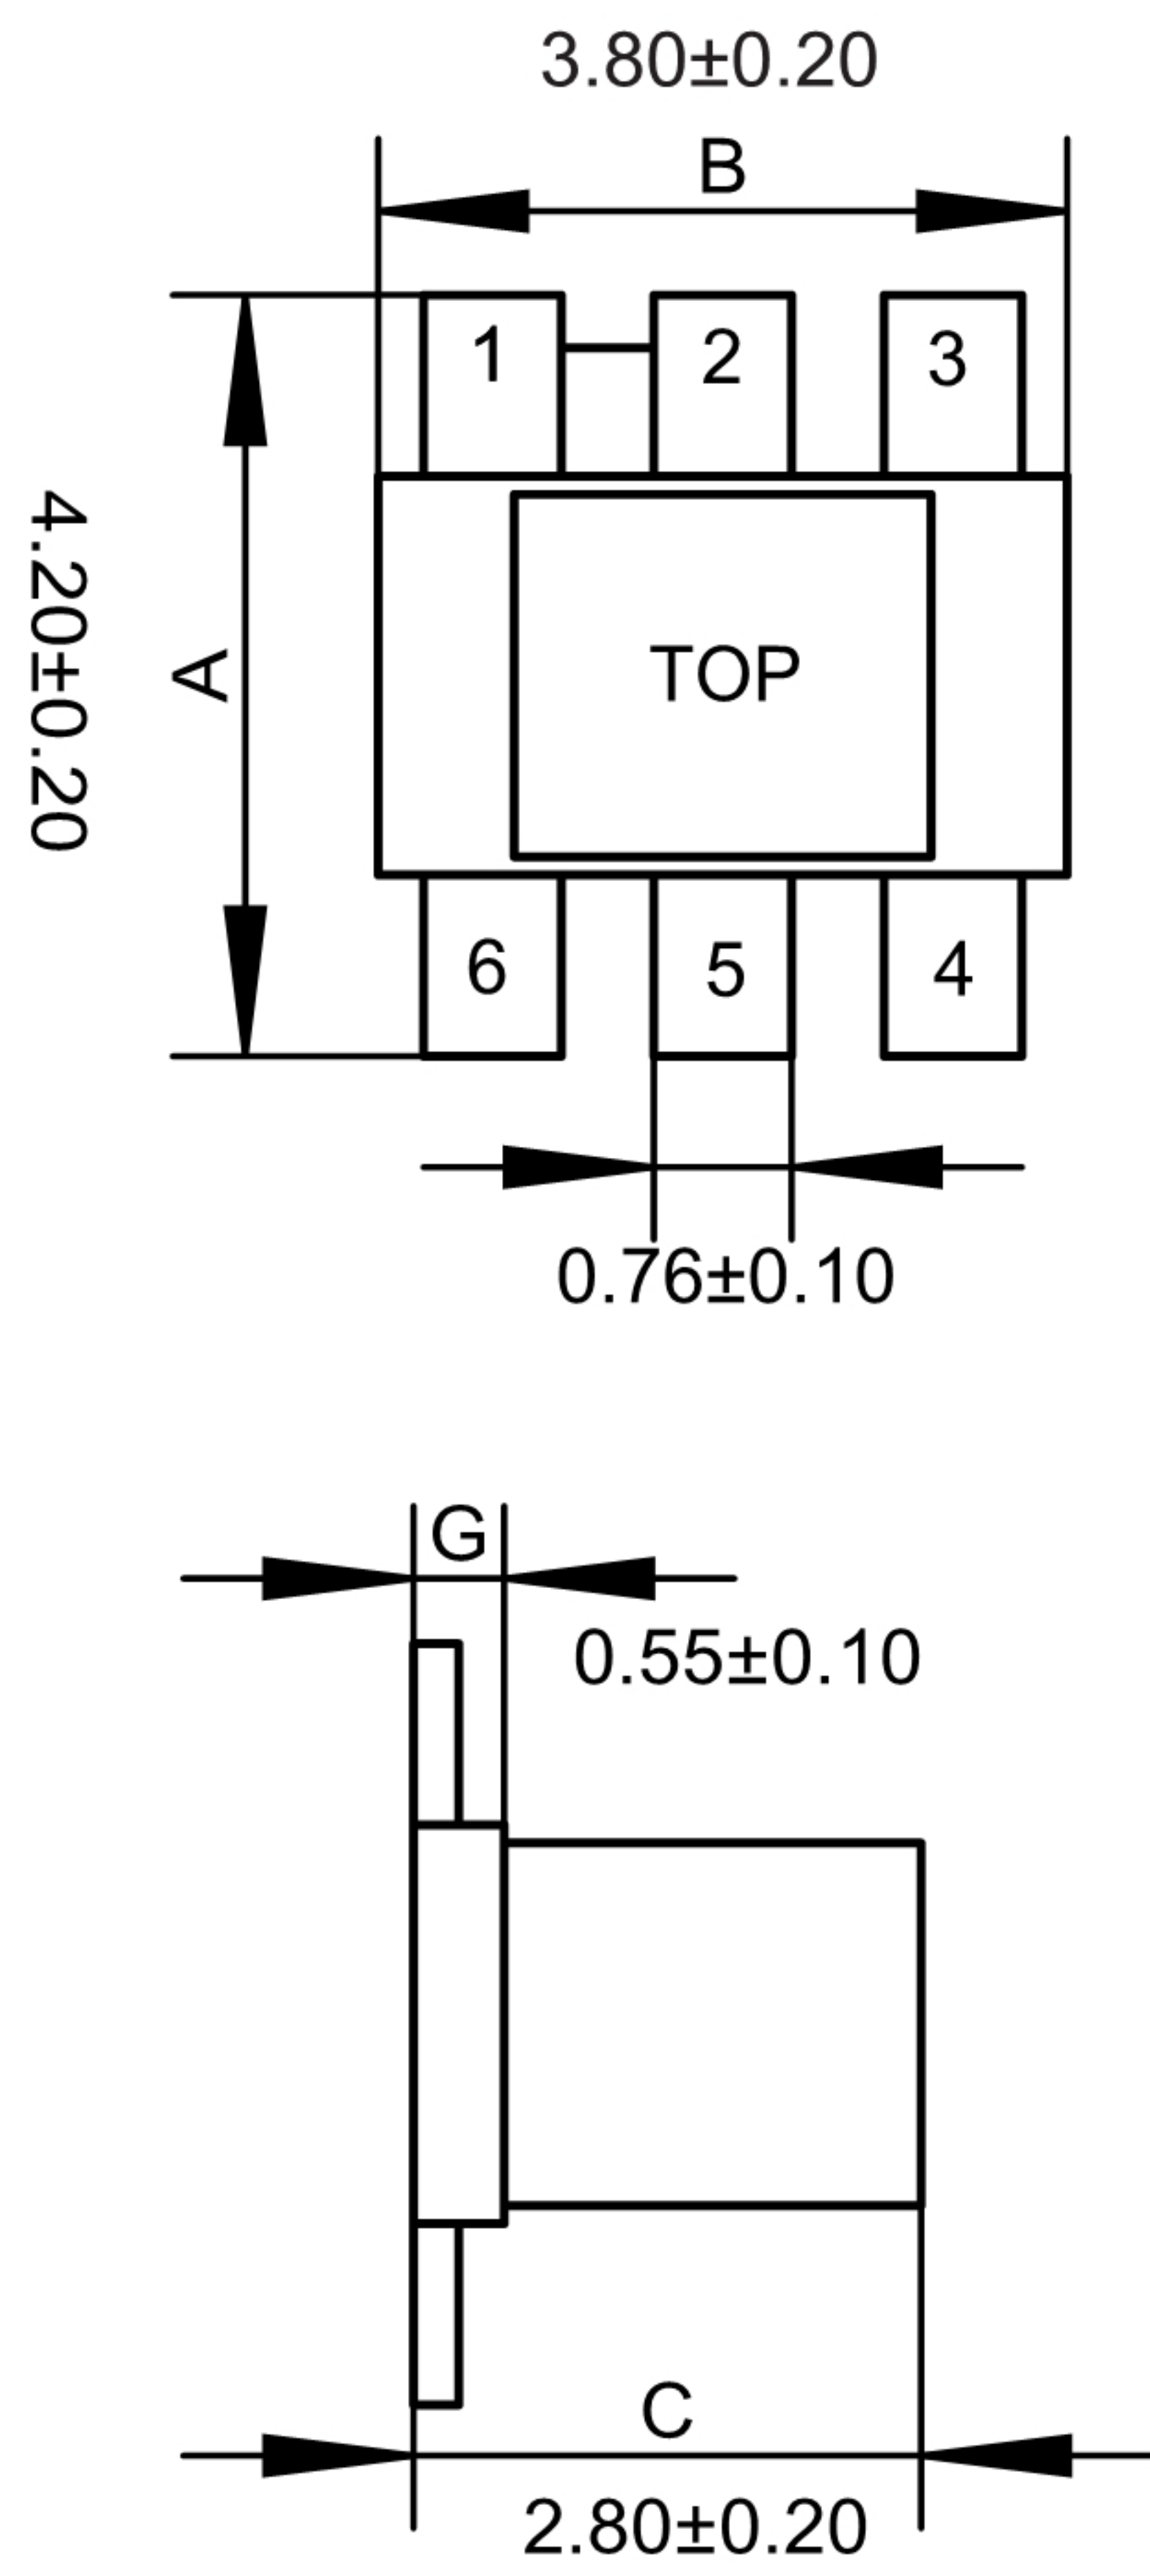

### Electrical structure

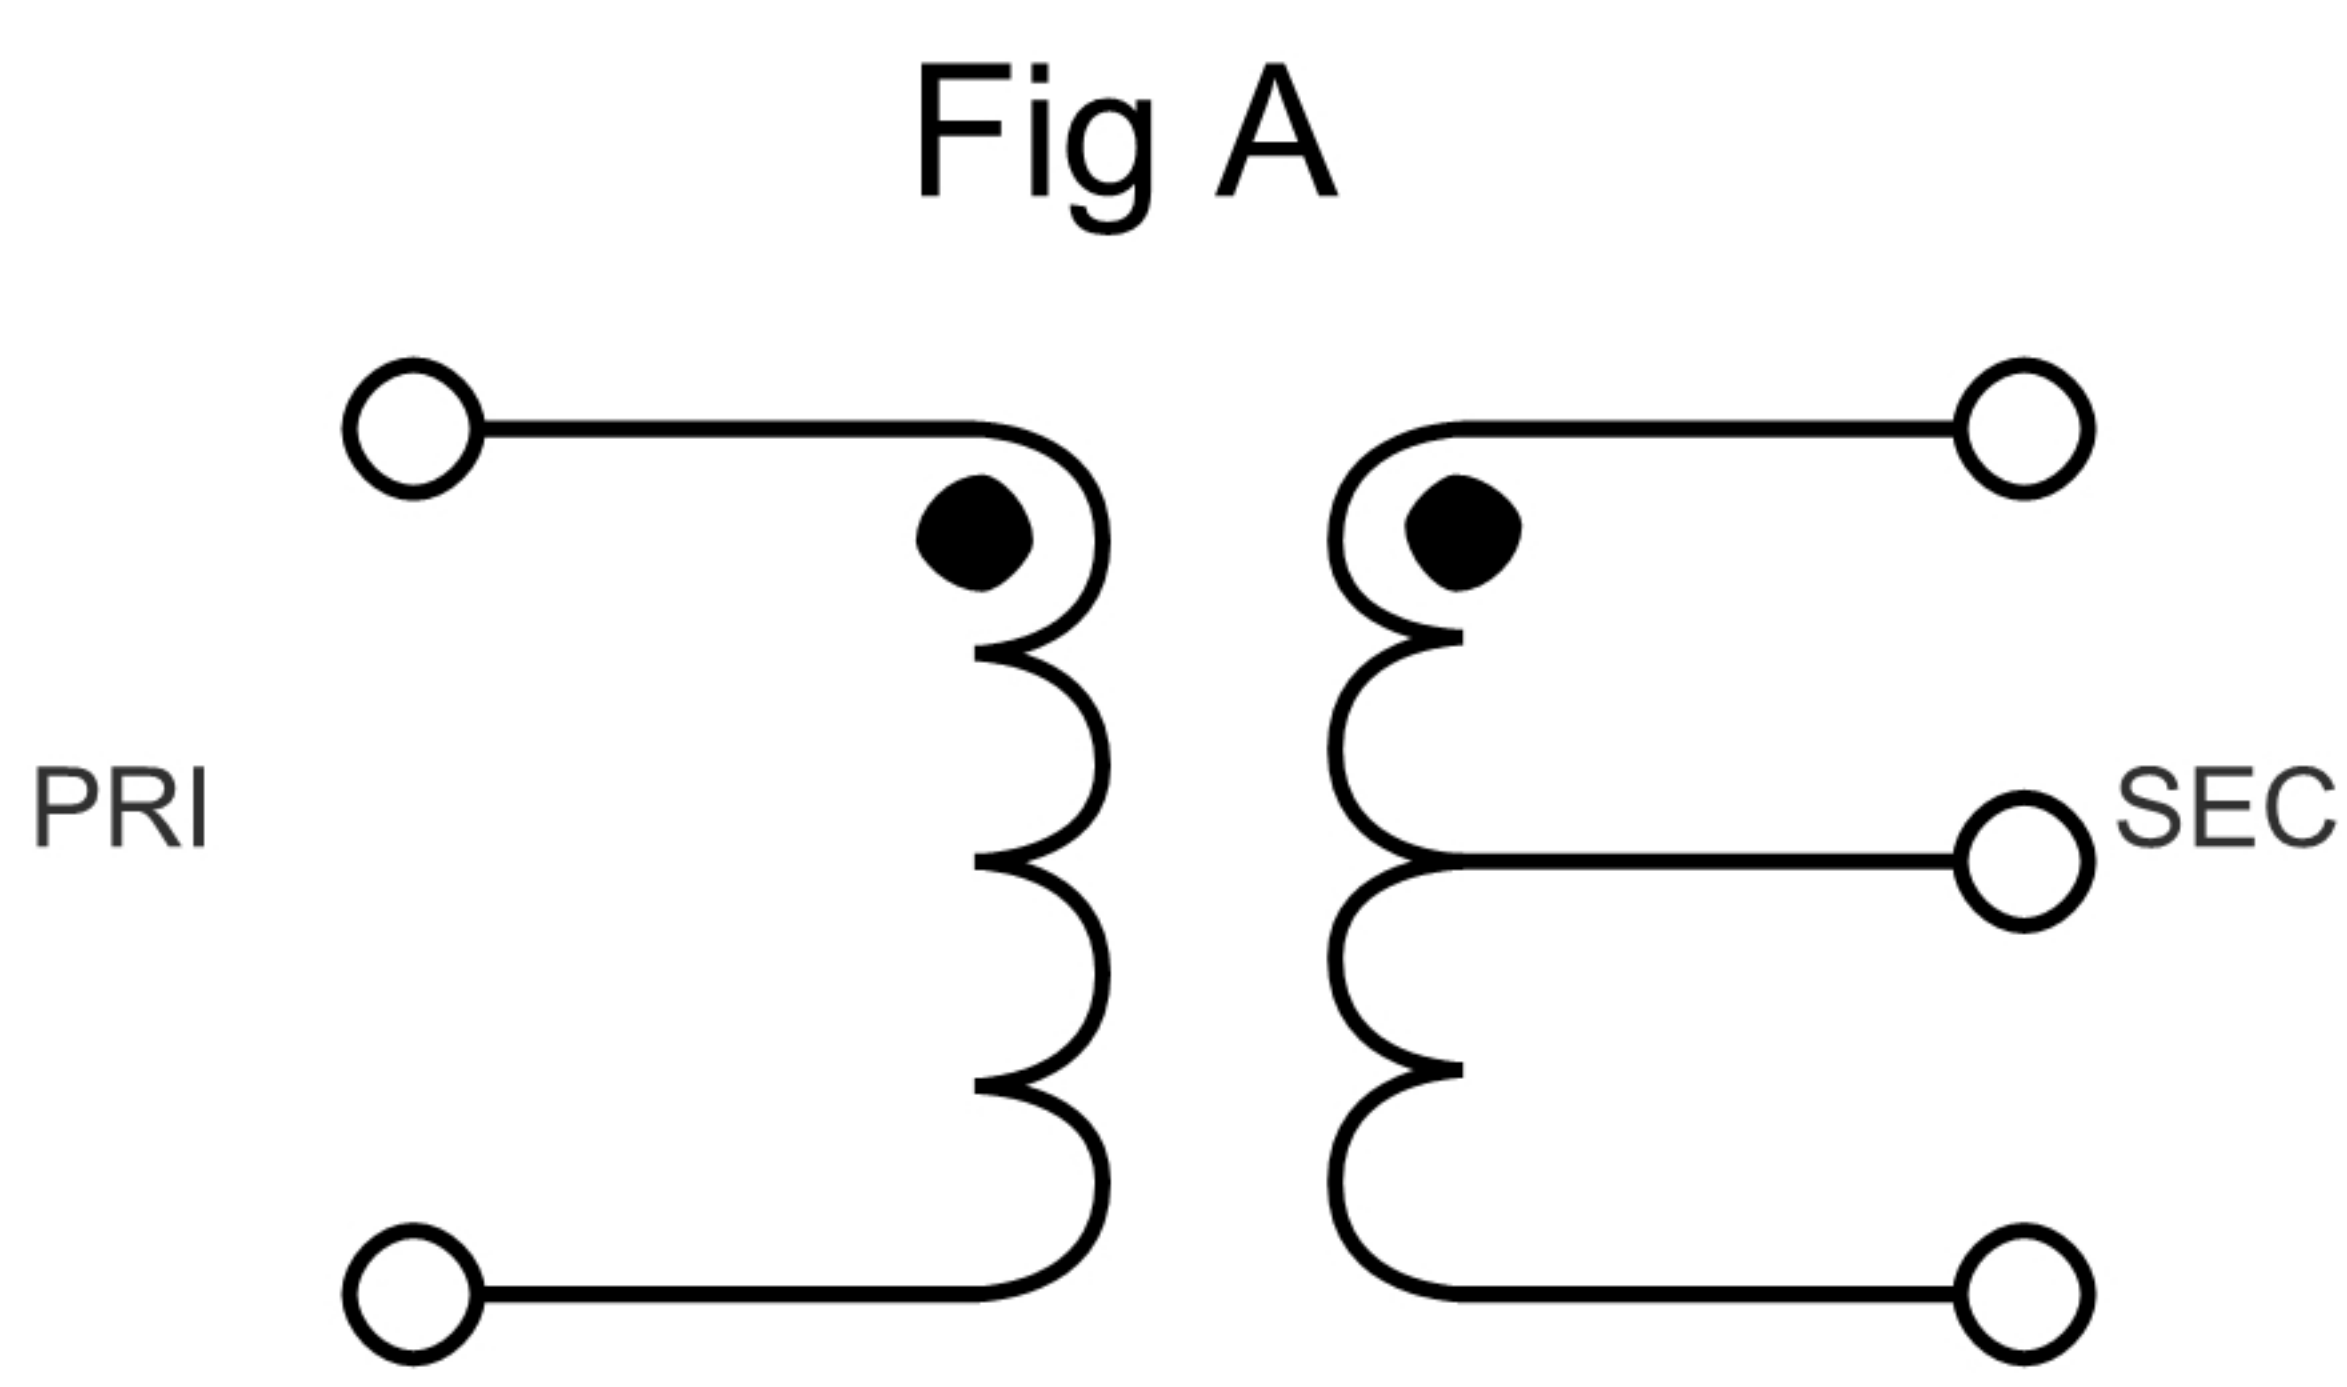

### Recommended layout(mm)

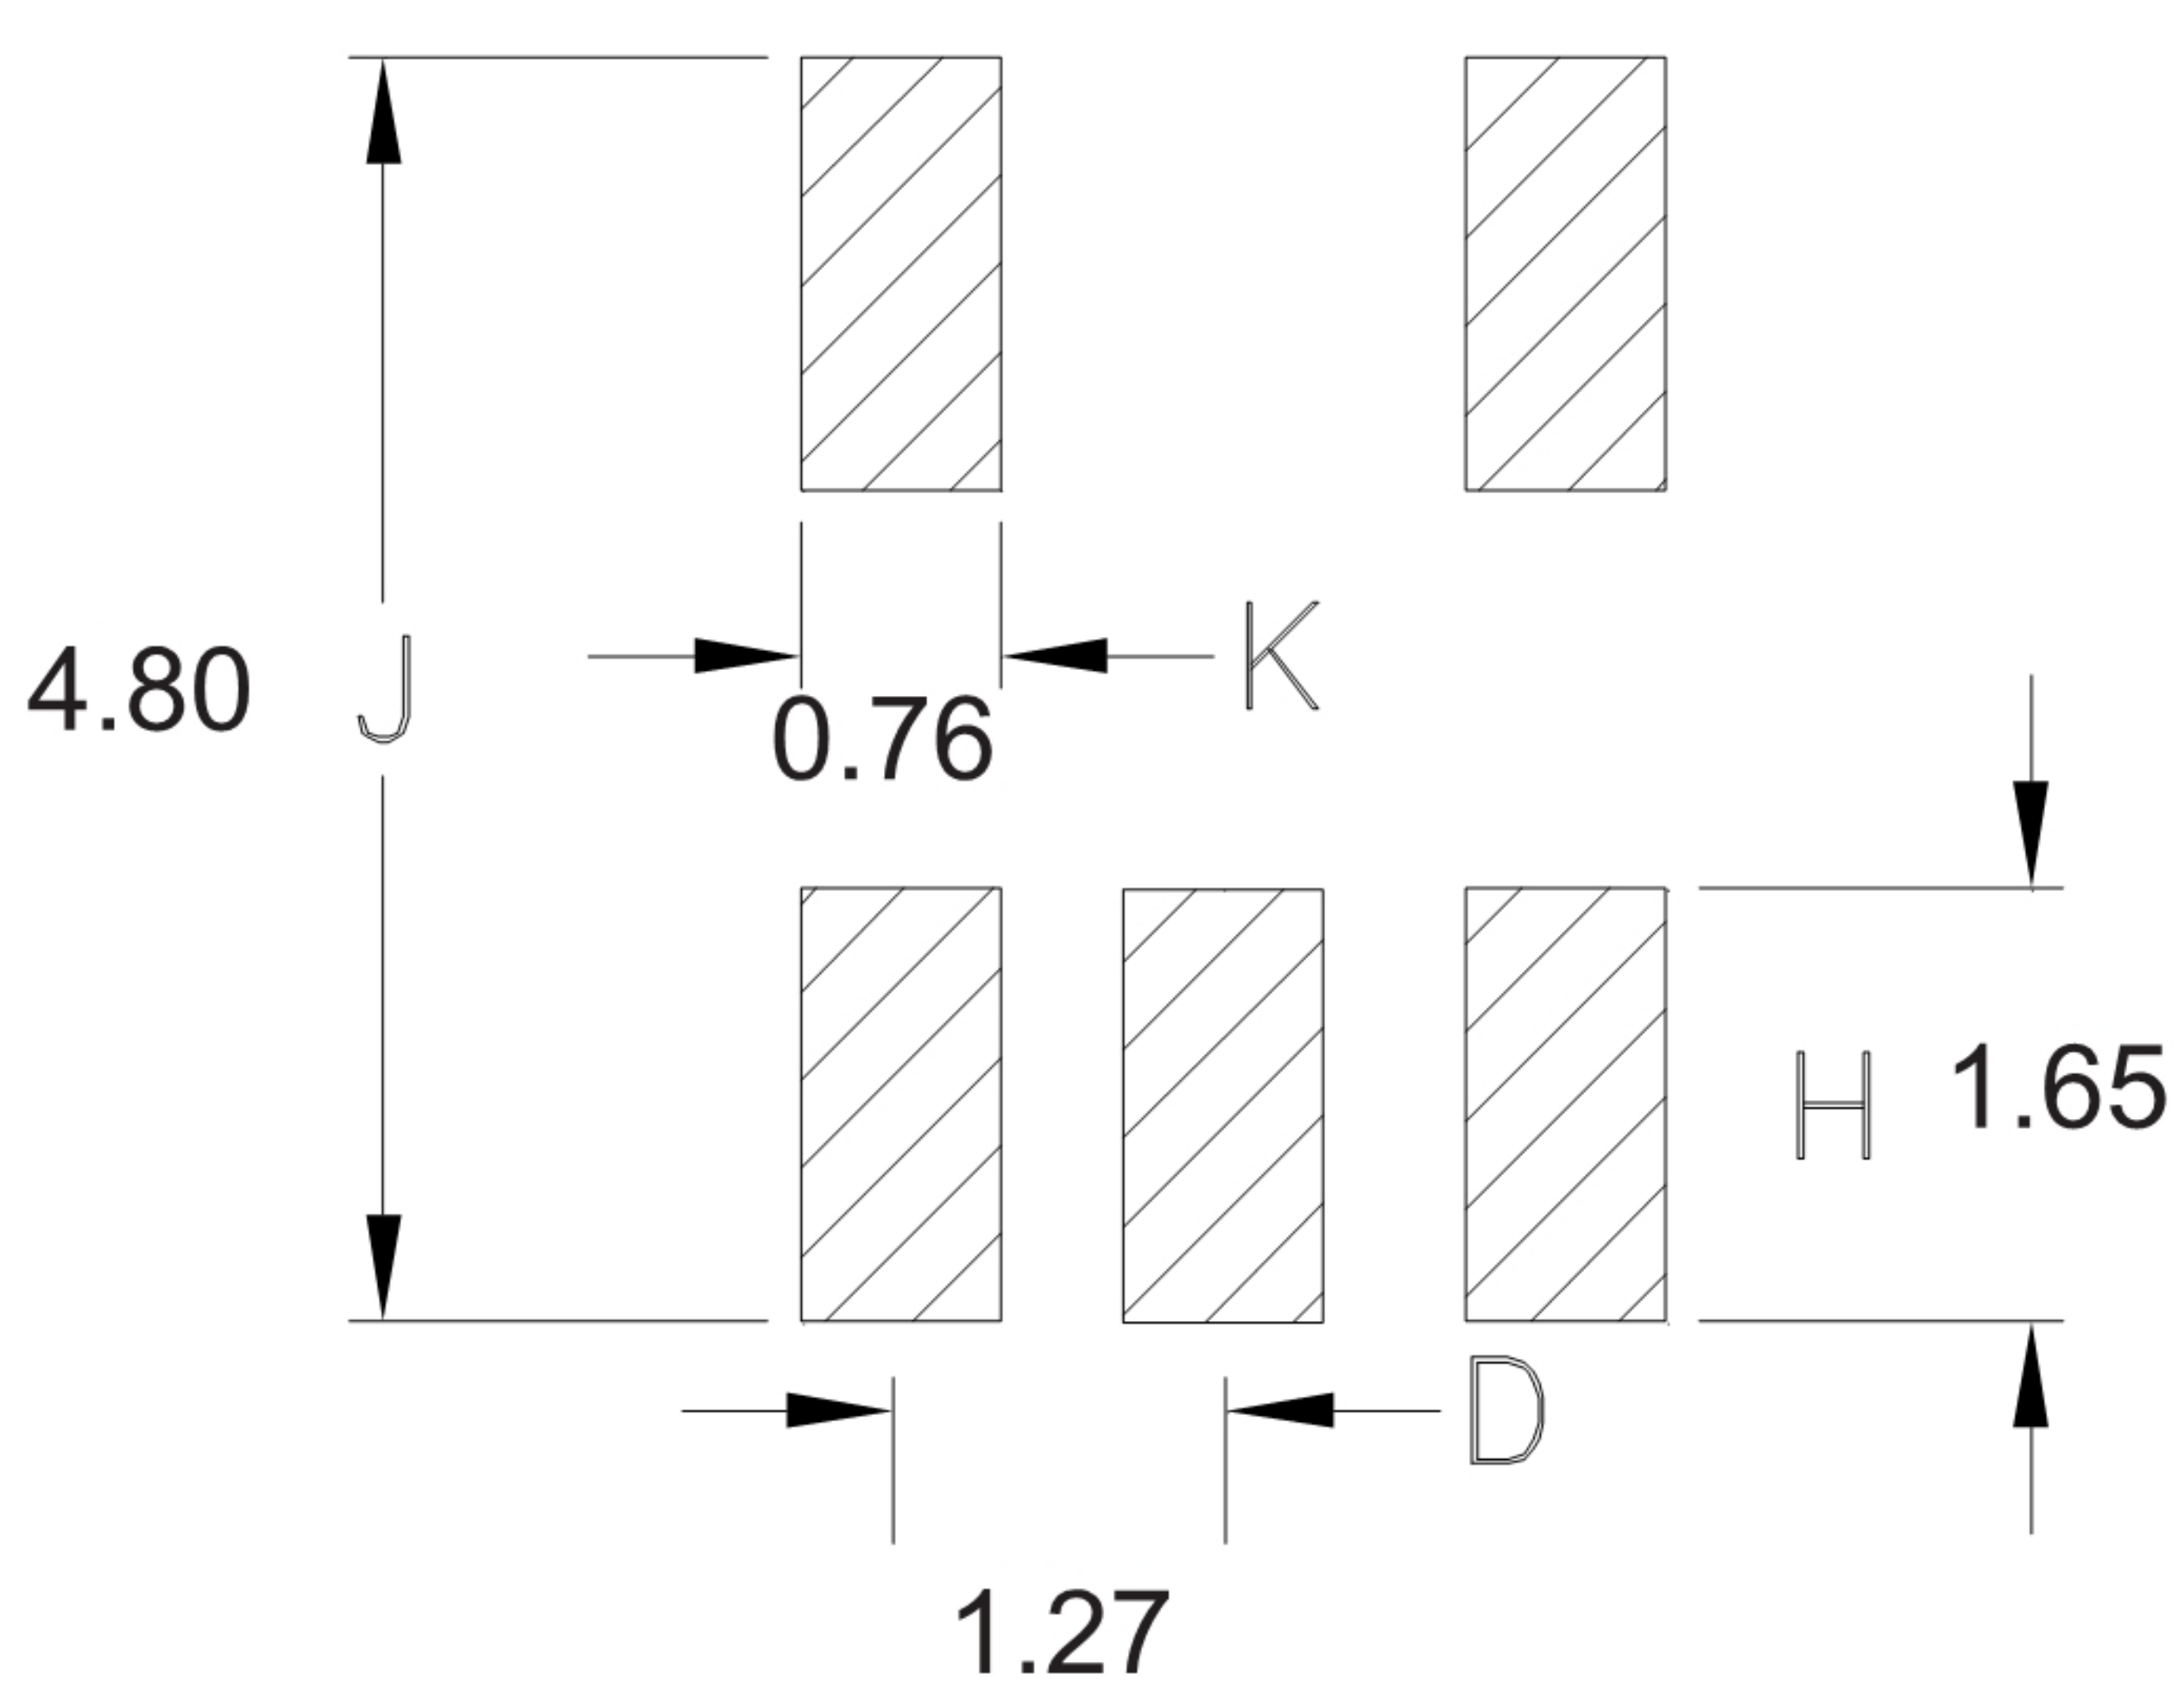

### Pin Connections

Input	6
Output 1	1
Output 2	3
Ground	2, 4

### Features





- Operating temperature range: -40°C to +85°C
- Storage temperature range: -55°C to +100°C
- 260°C Reflow Compatible
- RoHS compliant and lead free
- Input Power: 250 mW Max
- DC Current: 30mA Max

### Applications


- For Motorola Walkie-talkie.
- For Car Streaming Media Rearview Mirror.
- For Broadband and Wireless Communications.
- For Wireless Microphone & Marine Communications.
- For Ideally Suited LTE, Cellular, UMTS, WiFi, WiMAX.
- For Differential Modulator/demodulator and Active Mixers.

### Electrical Specifications: TA=25°C, 0dBm, Z0=50Ω

Parameter	Test Conditions	Units	Min	Typ	Max
Main line Loss (Pin6-1)	3-800MHz	dB	—	2.2	3.0
Main line Loss (Pin6-3)	3-800MHz	dB	—	1.2	2.0
Amplitude Balance	3-800MHz	dB	0.0	0.8	1.5
Phase Balance	3-800MHz	°	0.0	5.0	15.0
Input Return Loss(Pin6)	3-800MHz	dB	8.0	12.0	—
CMRR	3-800MHz	dB	20.0	25.0	—

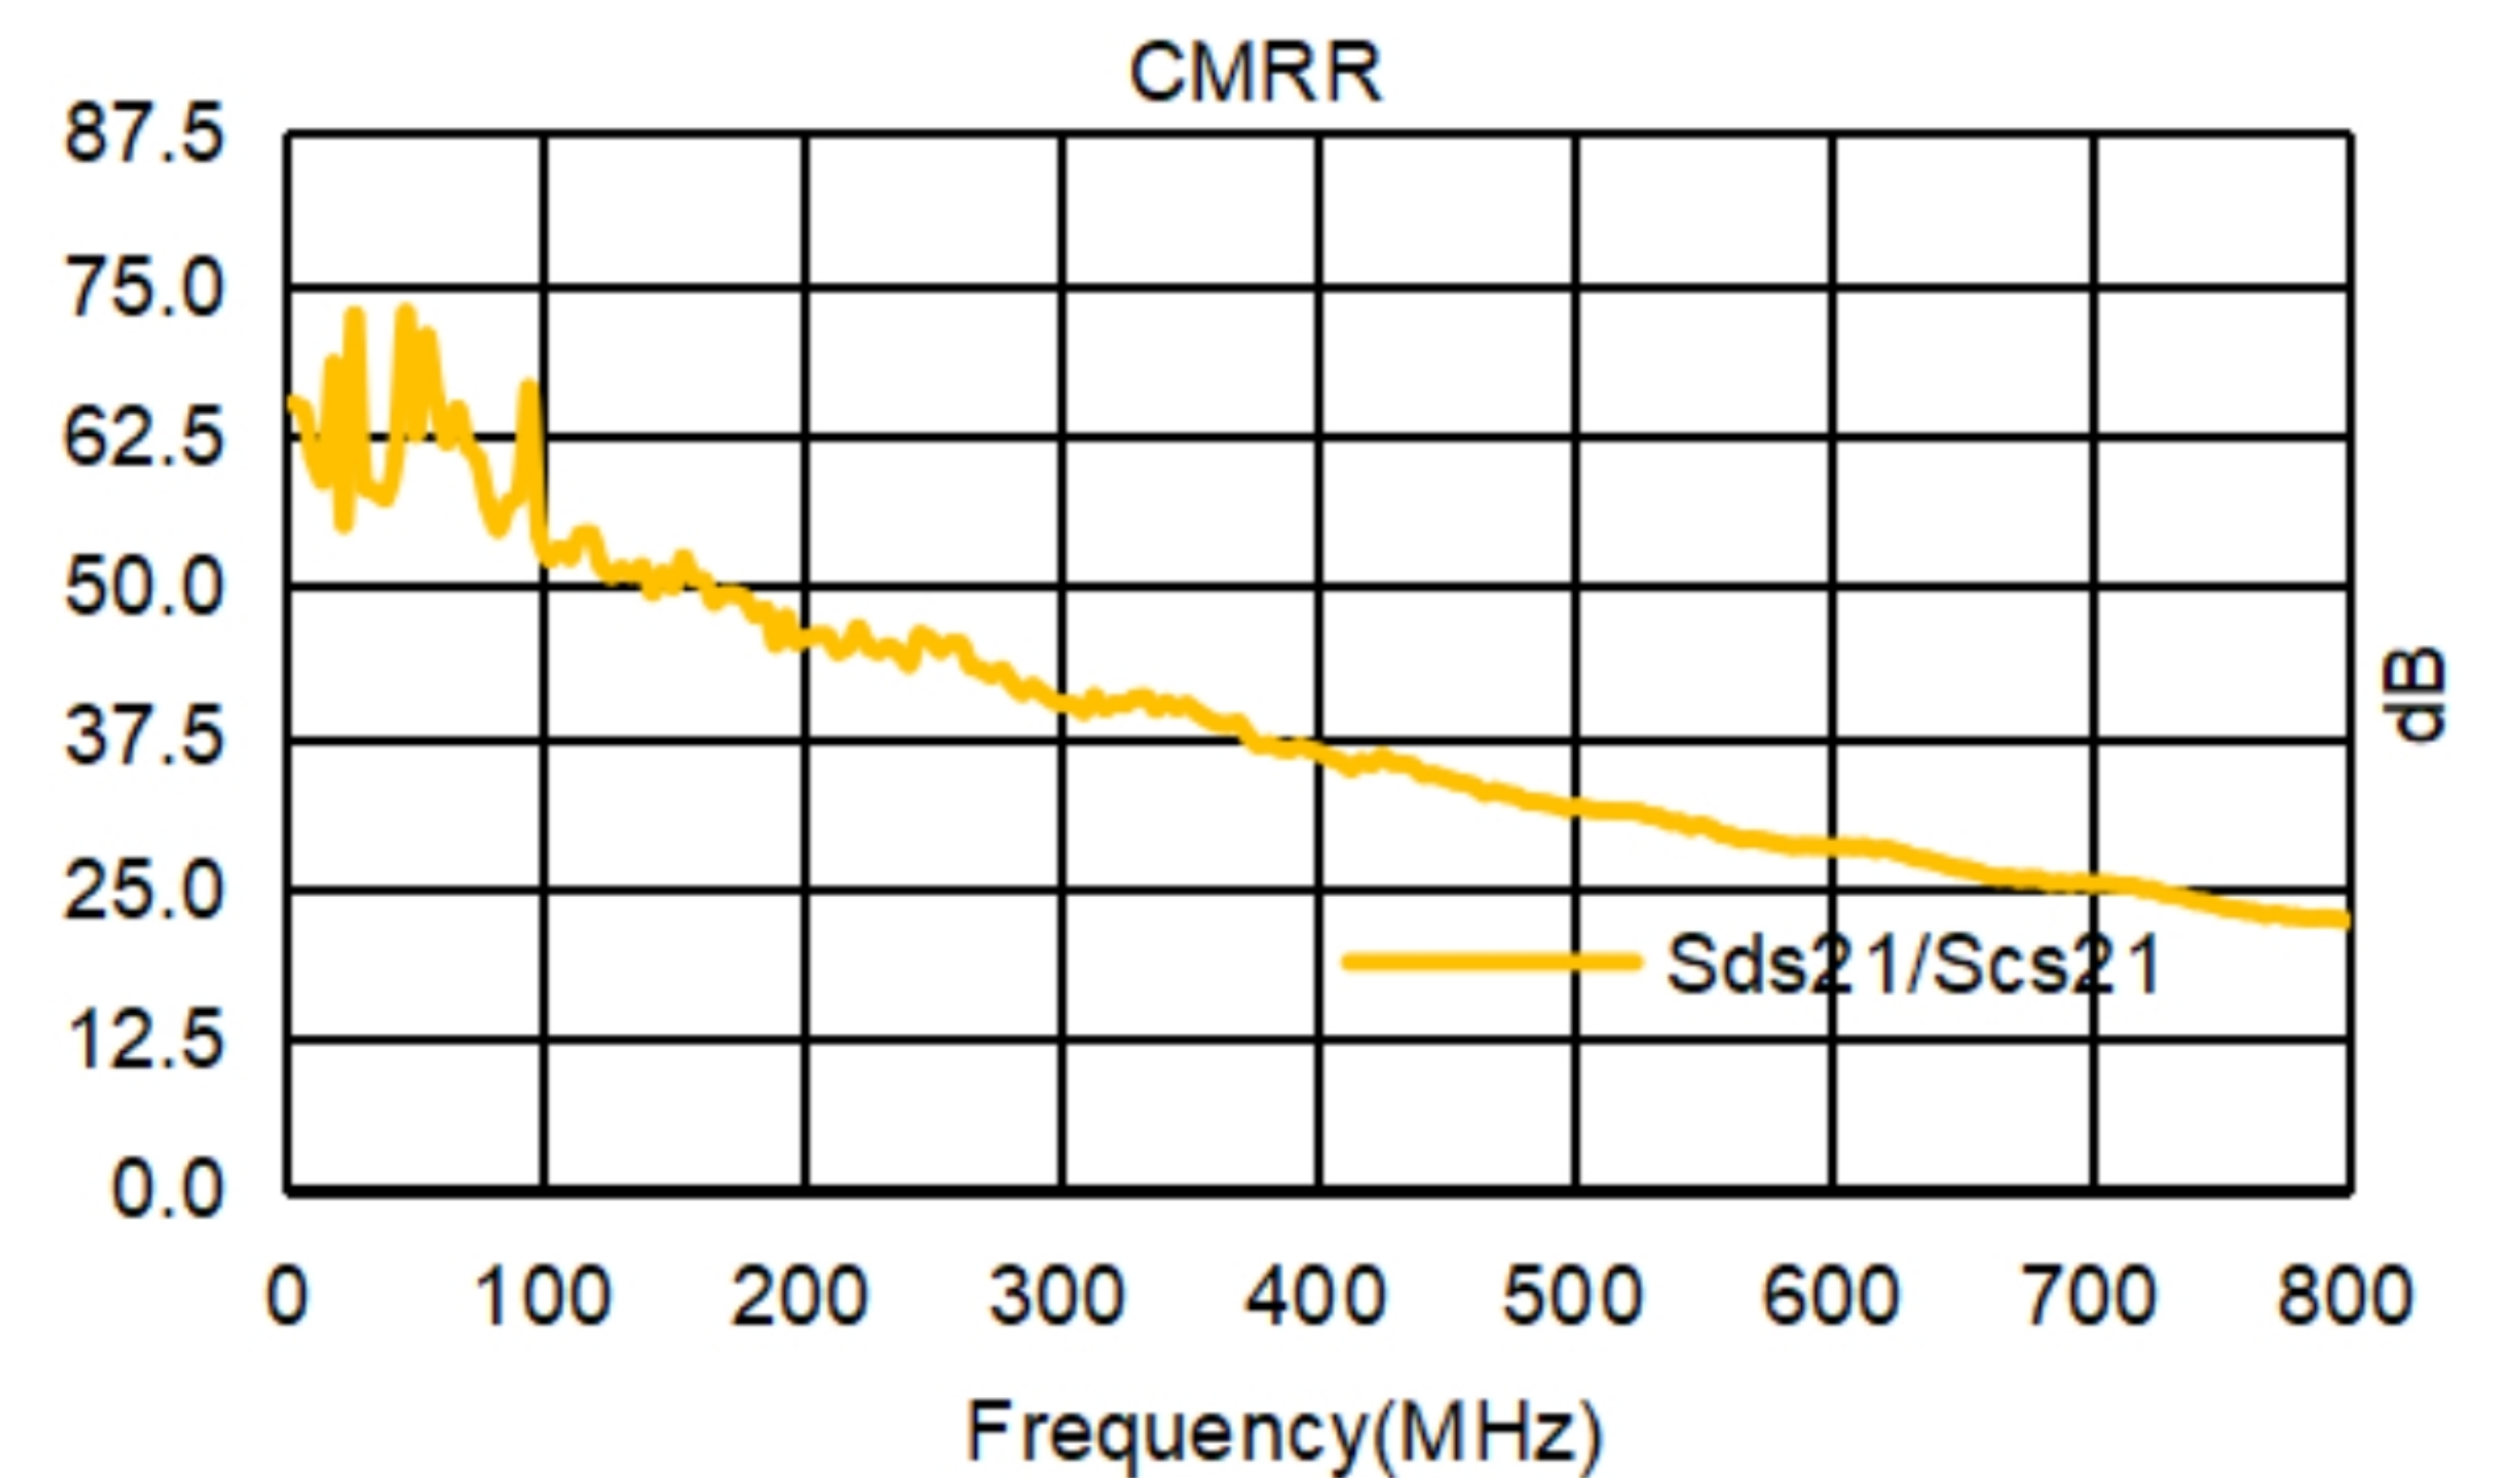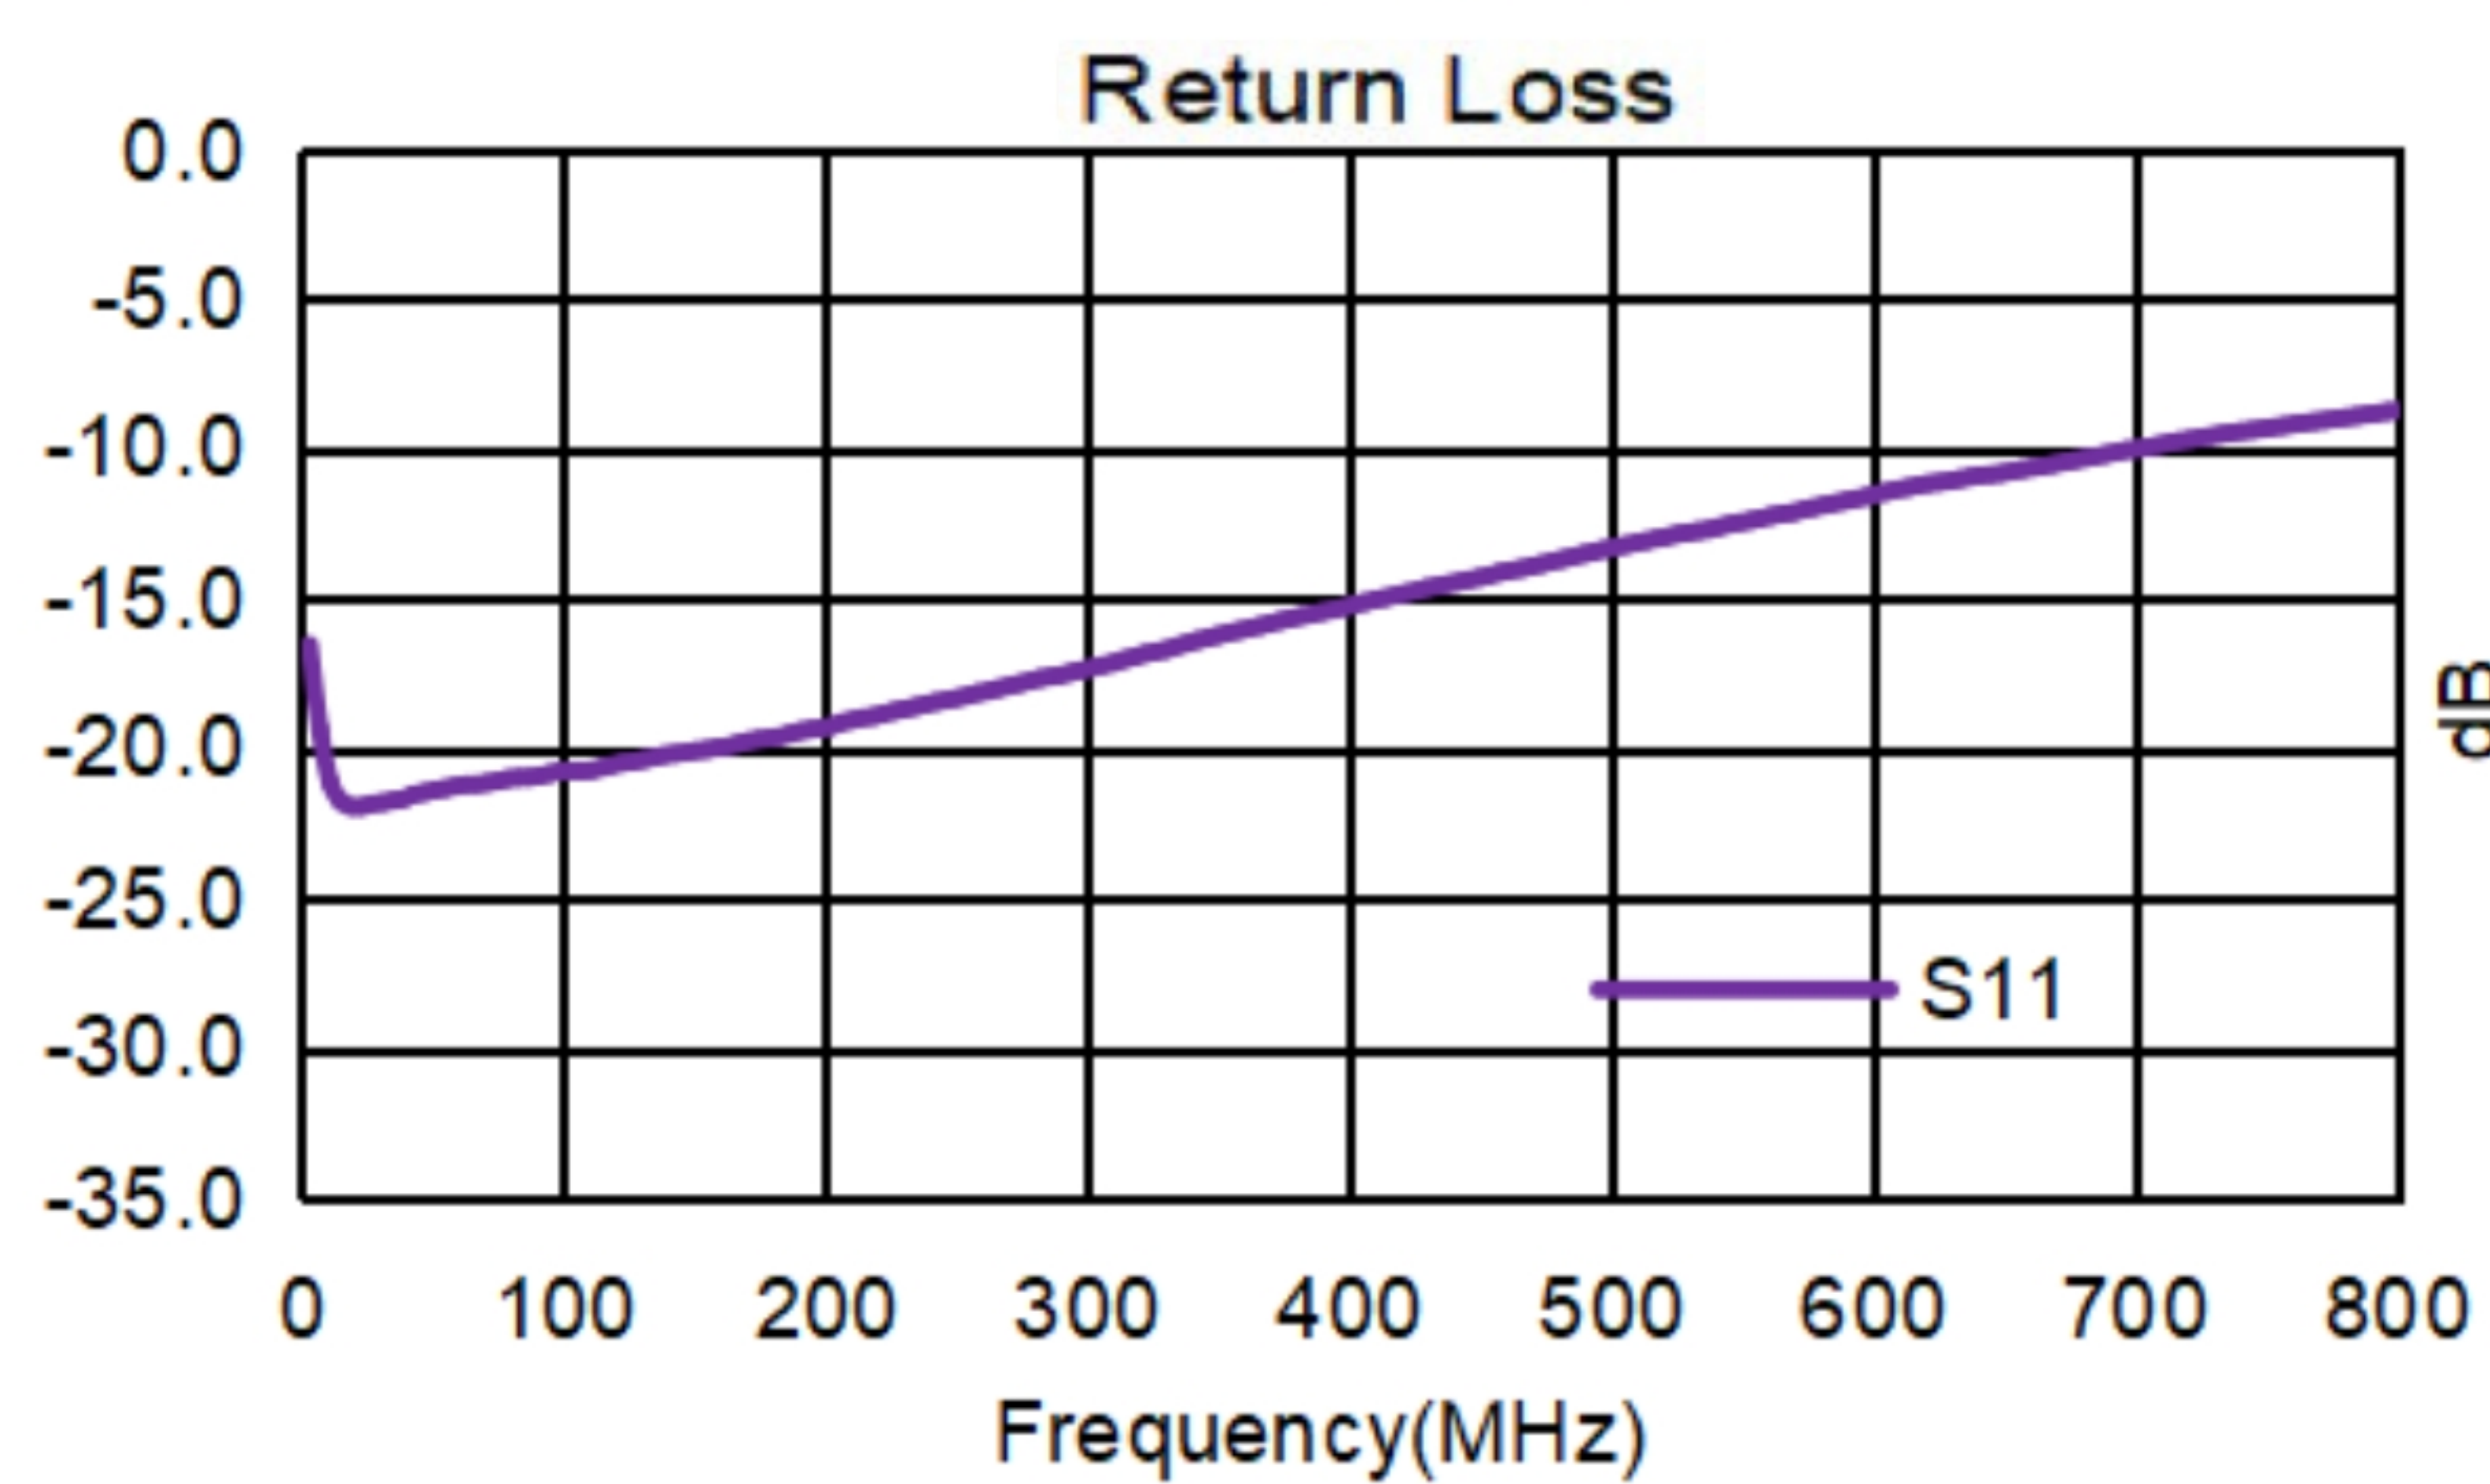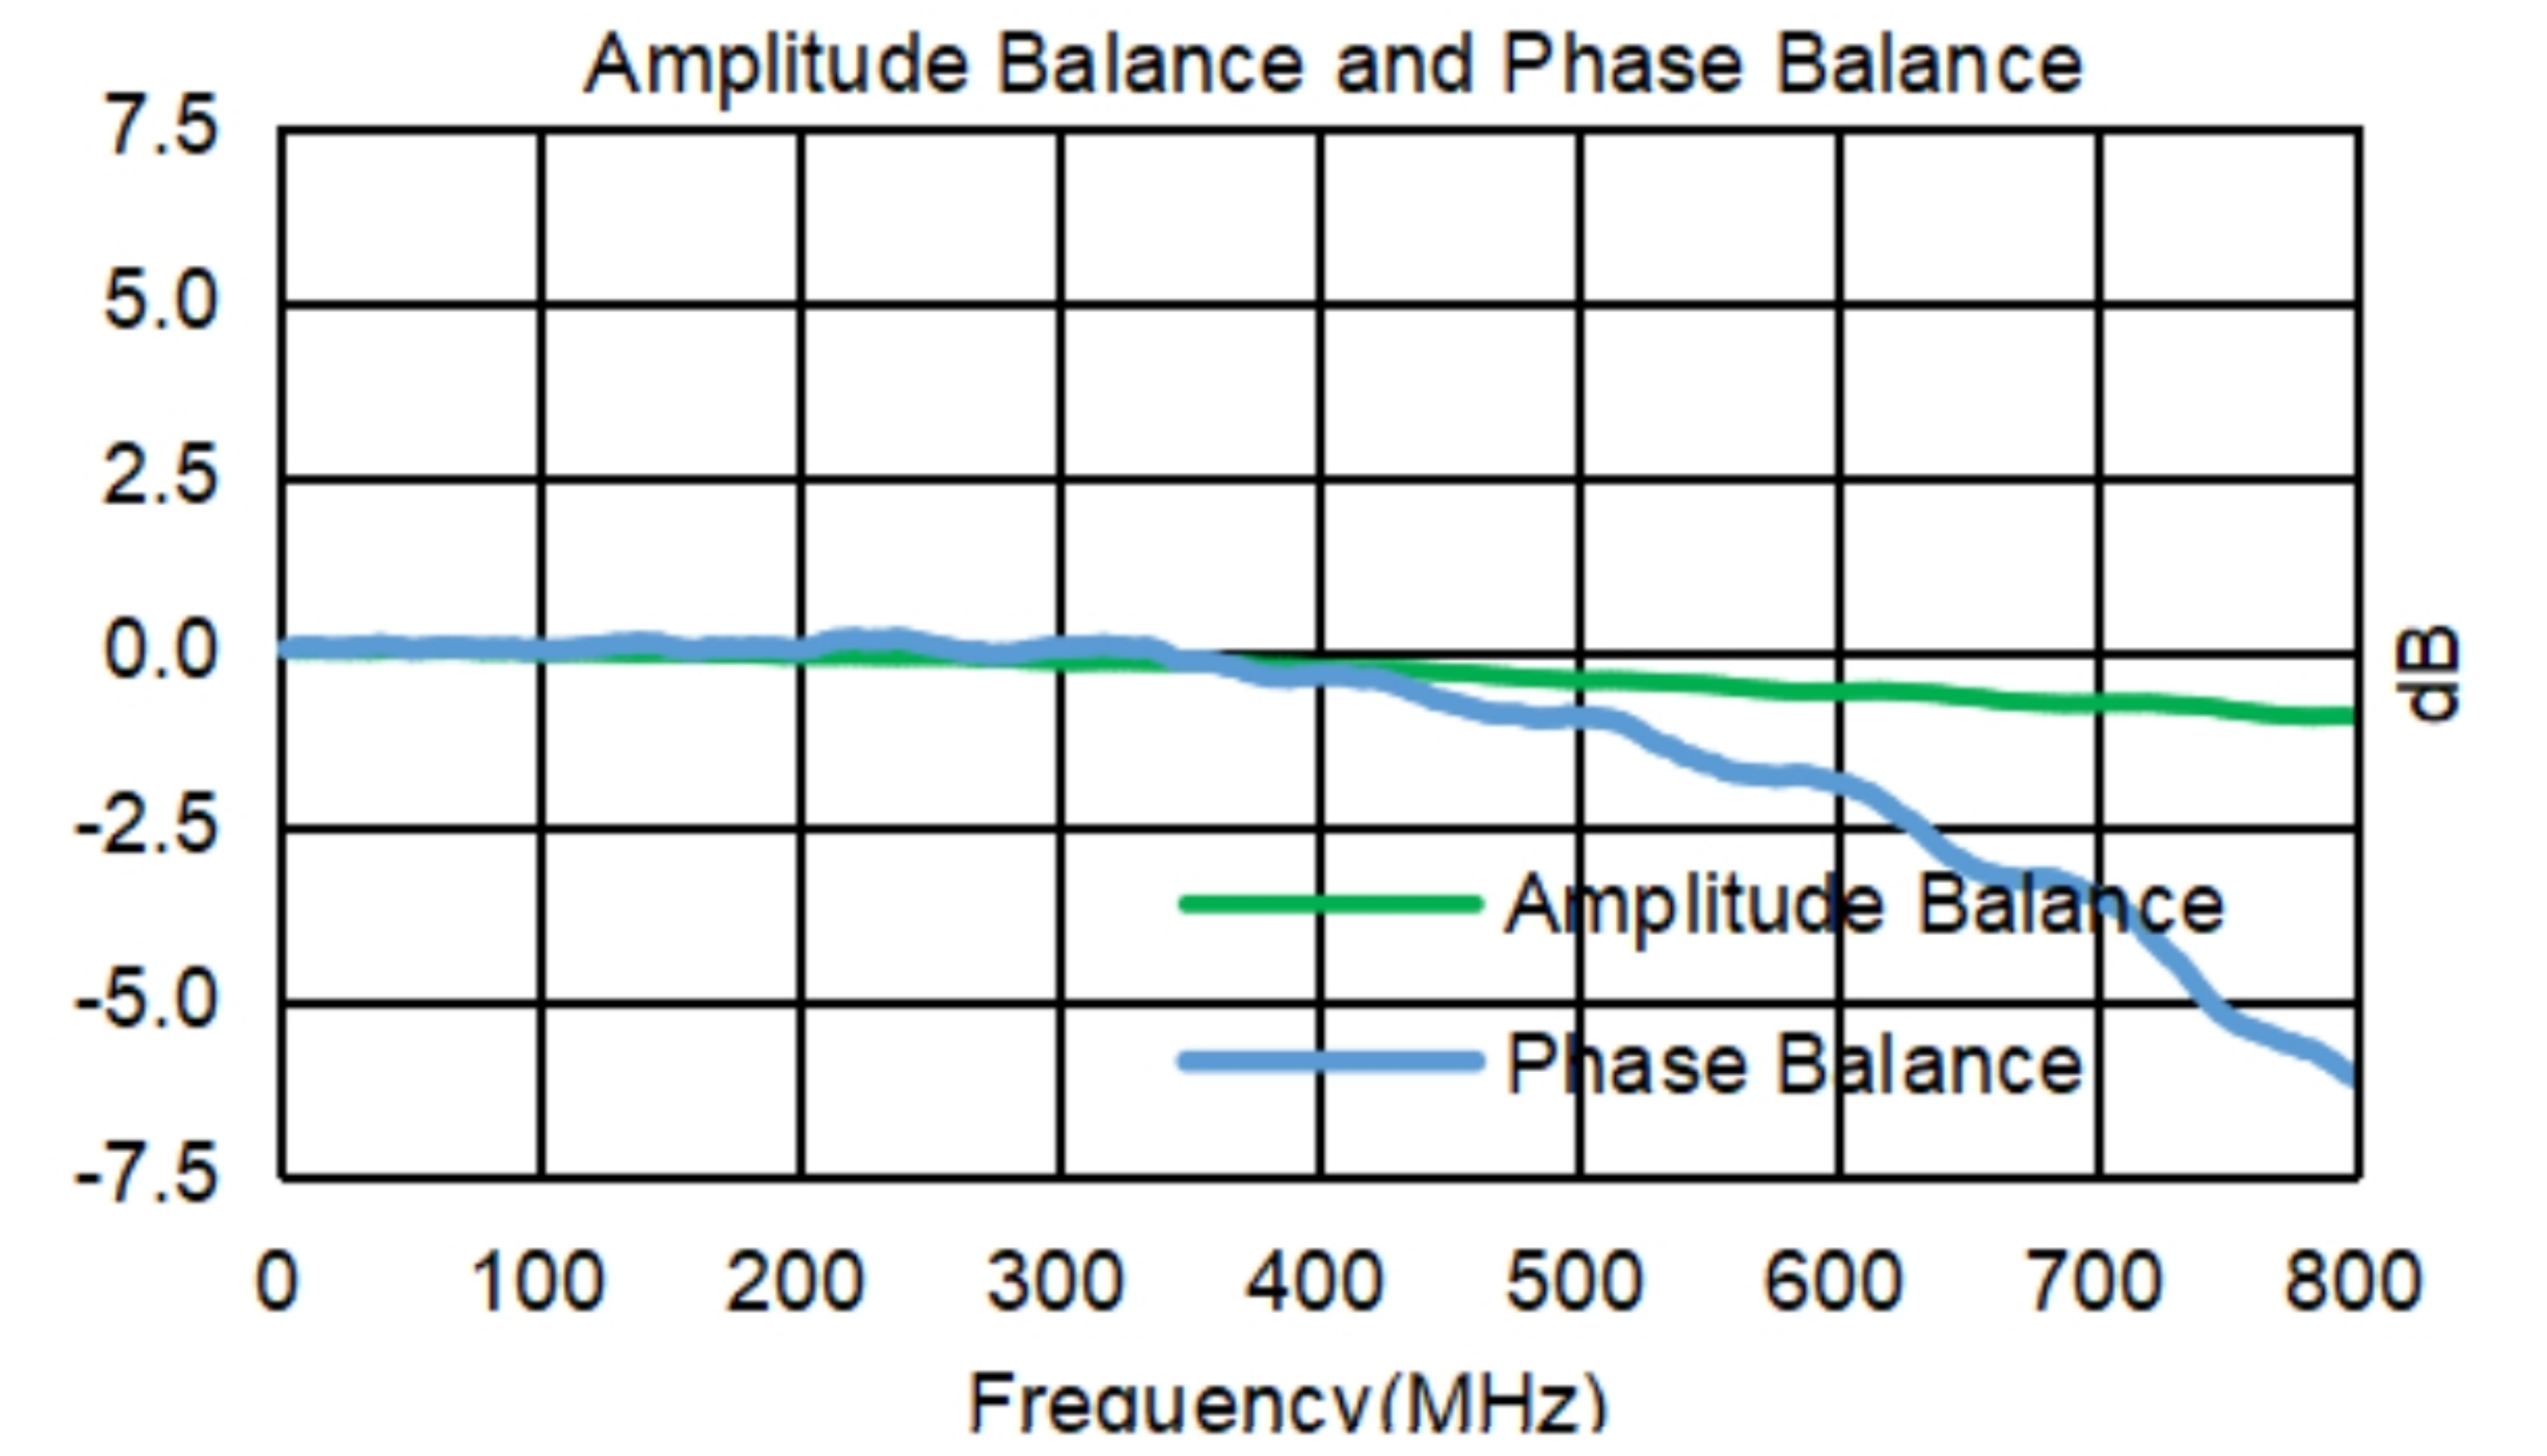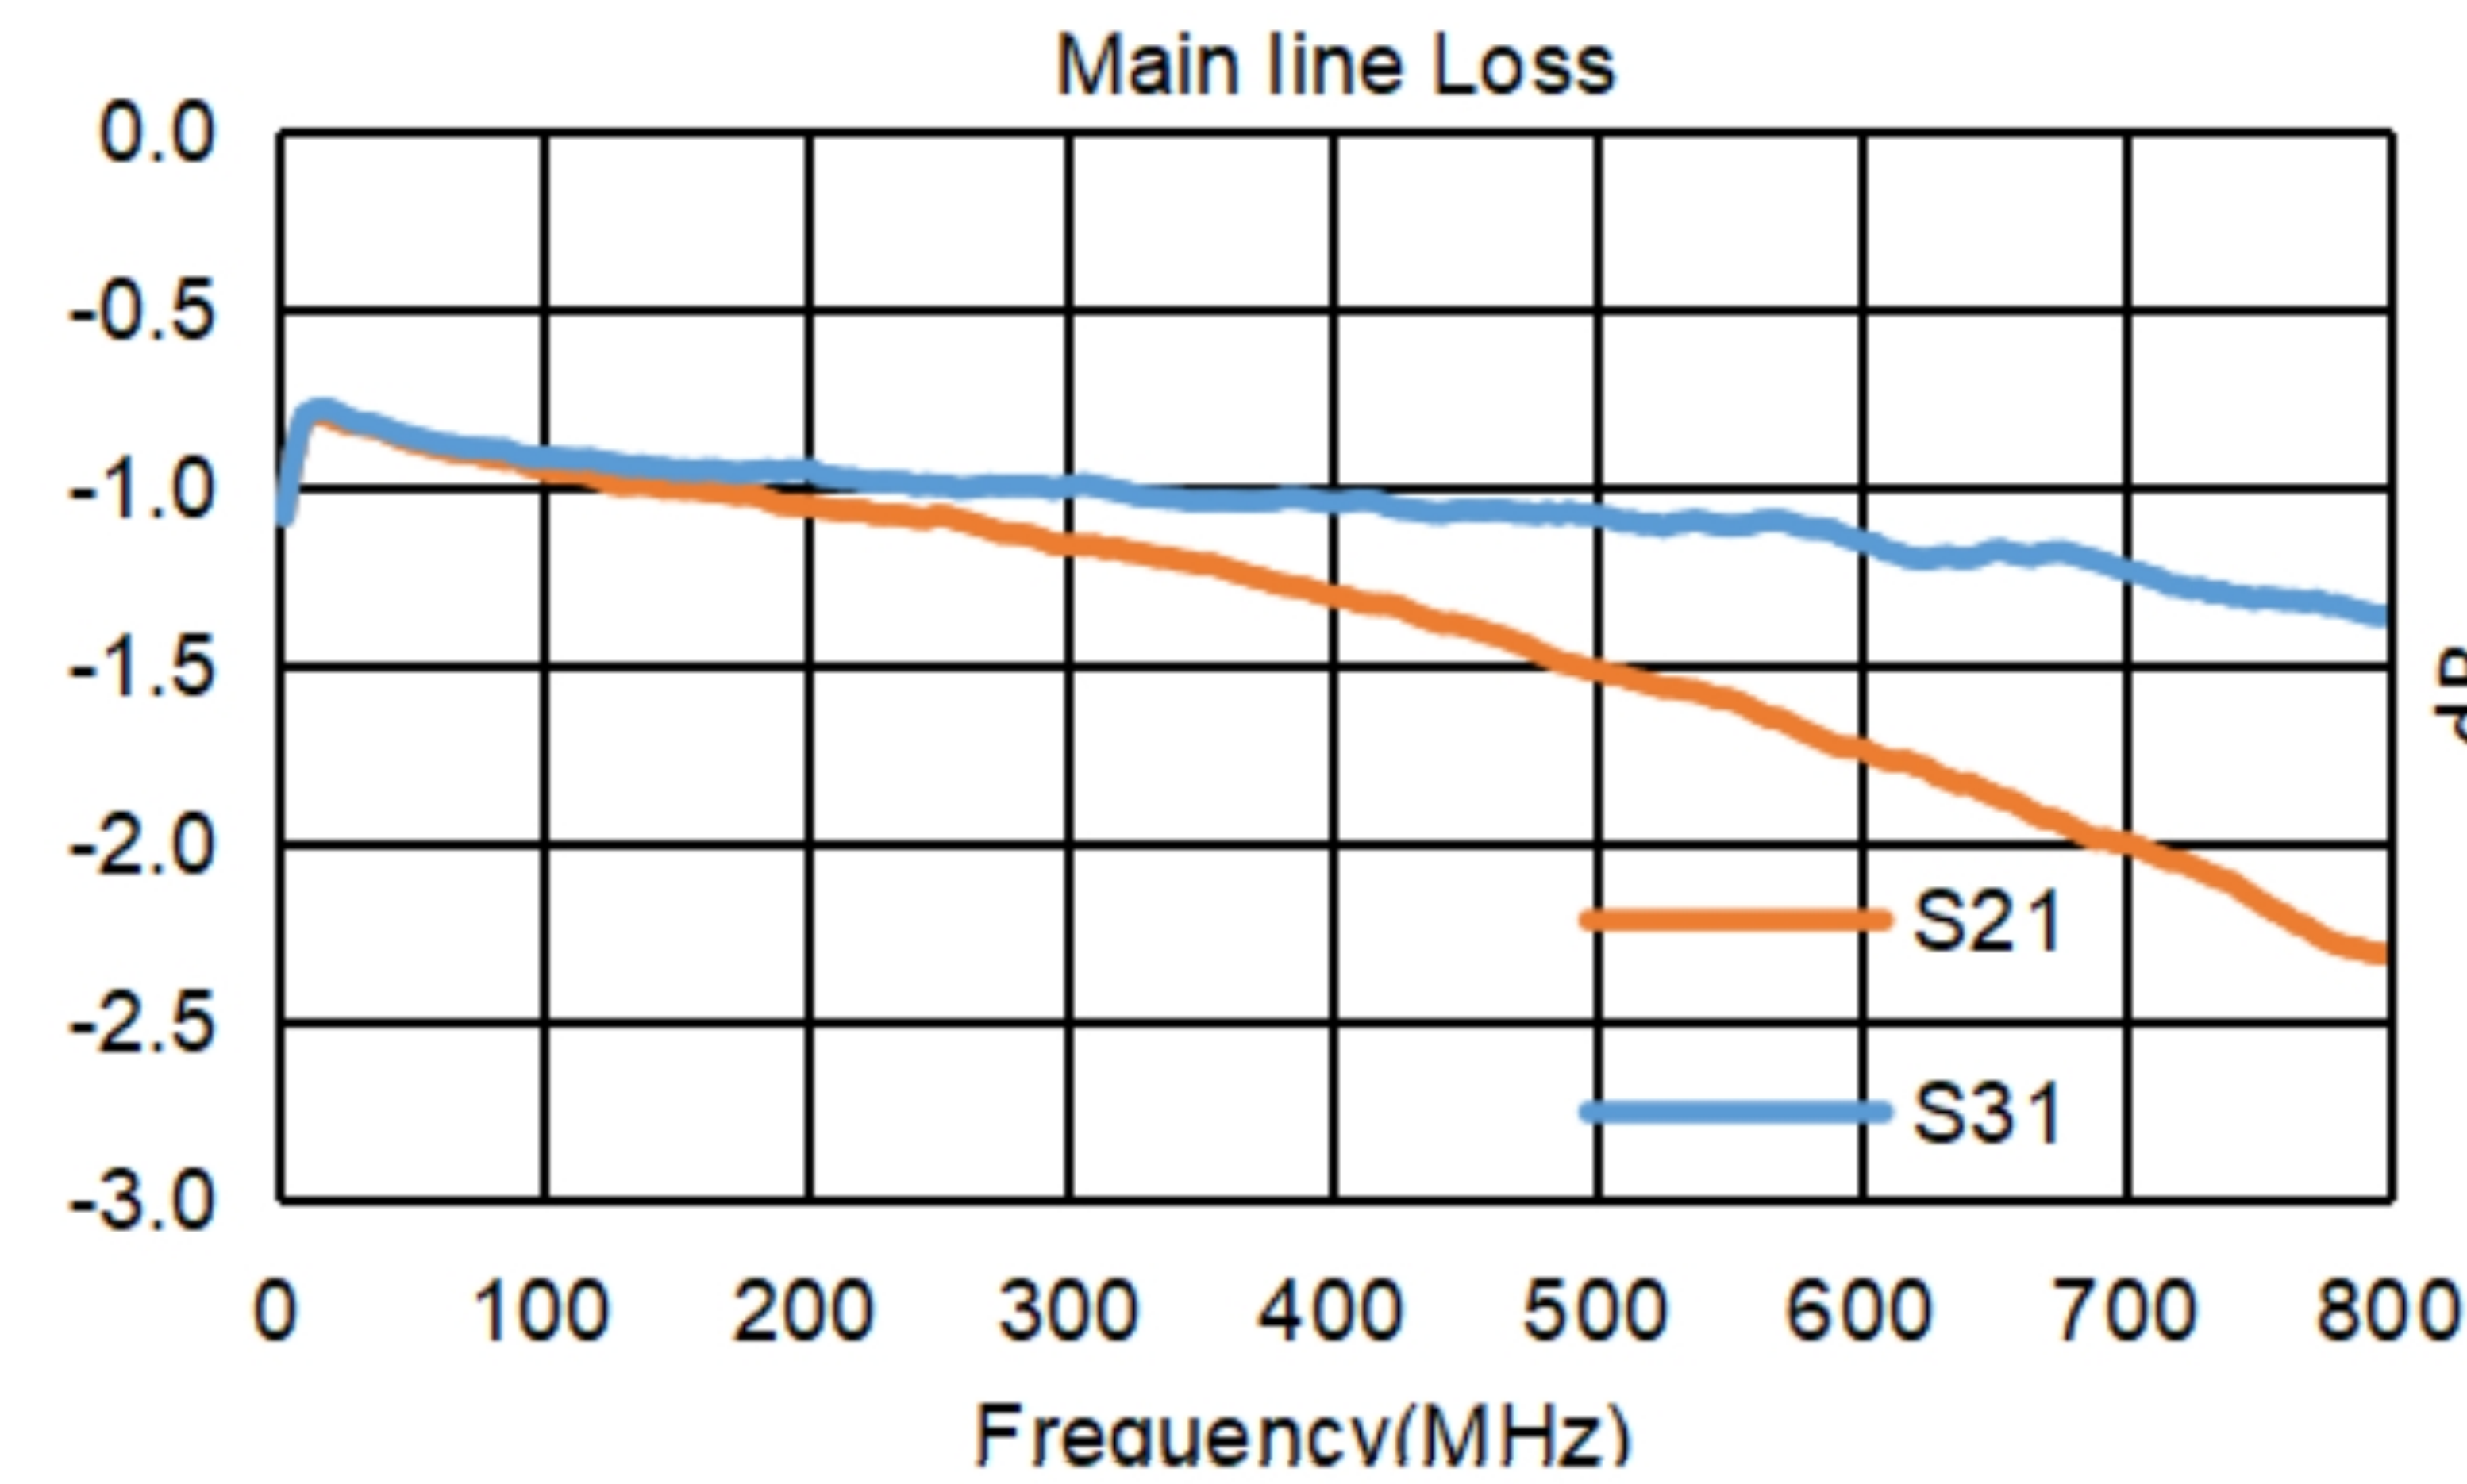

### Carrier Tape Orientation

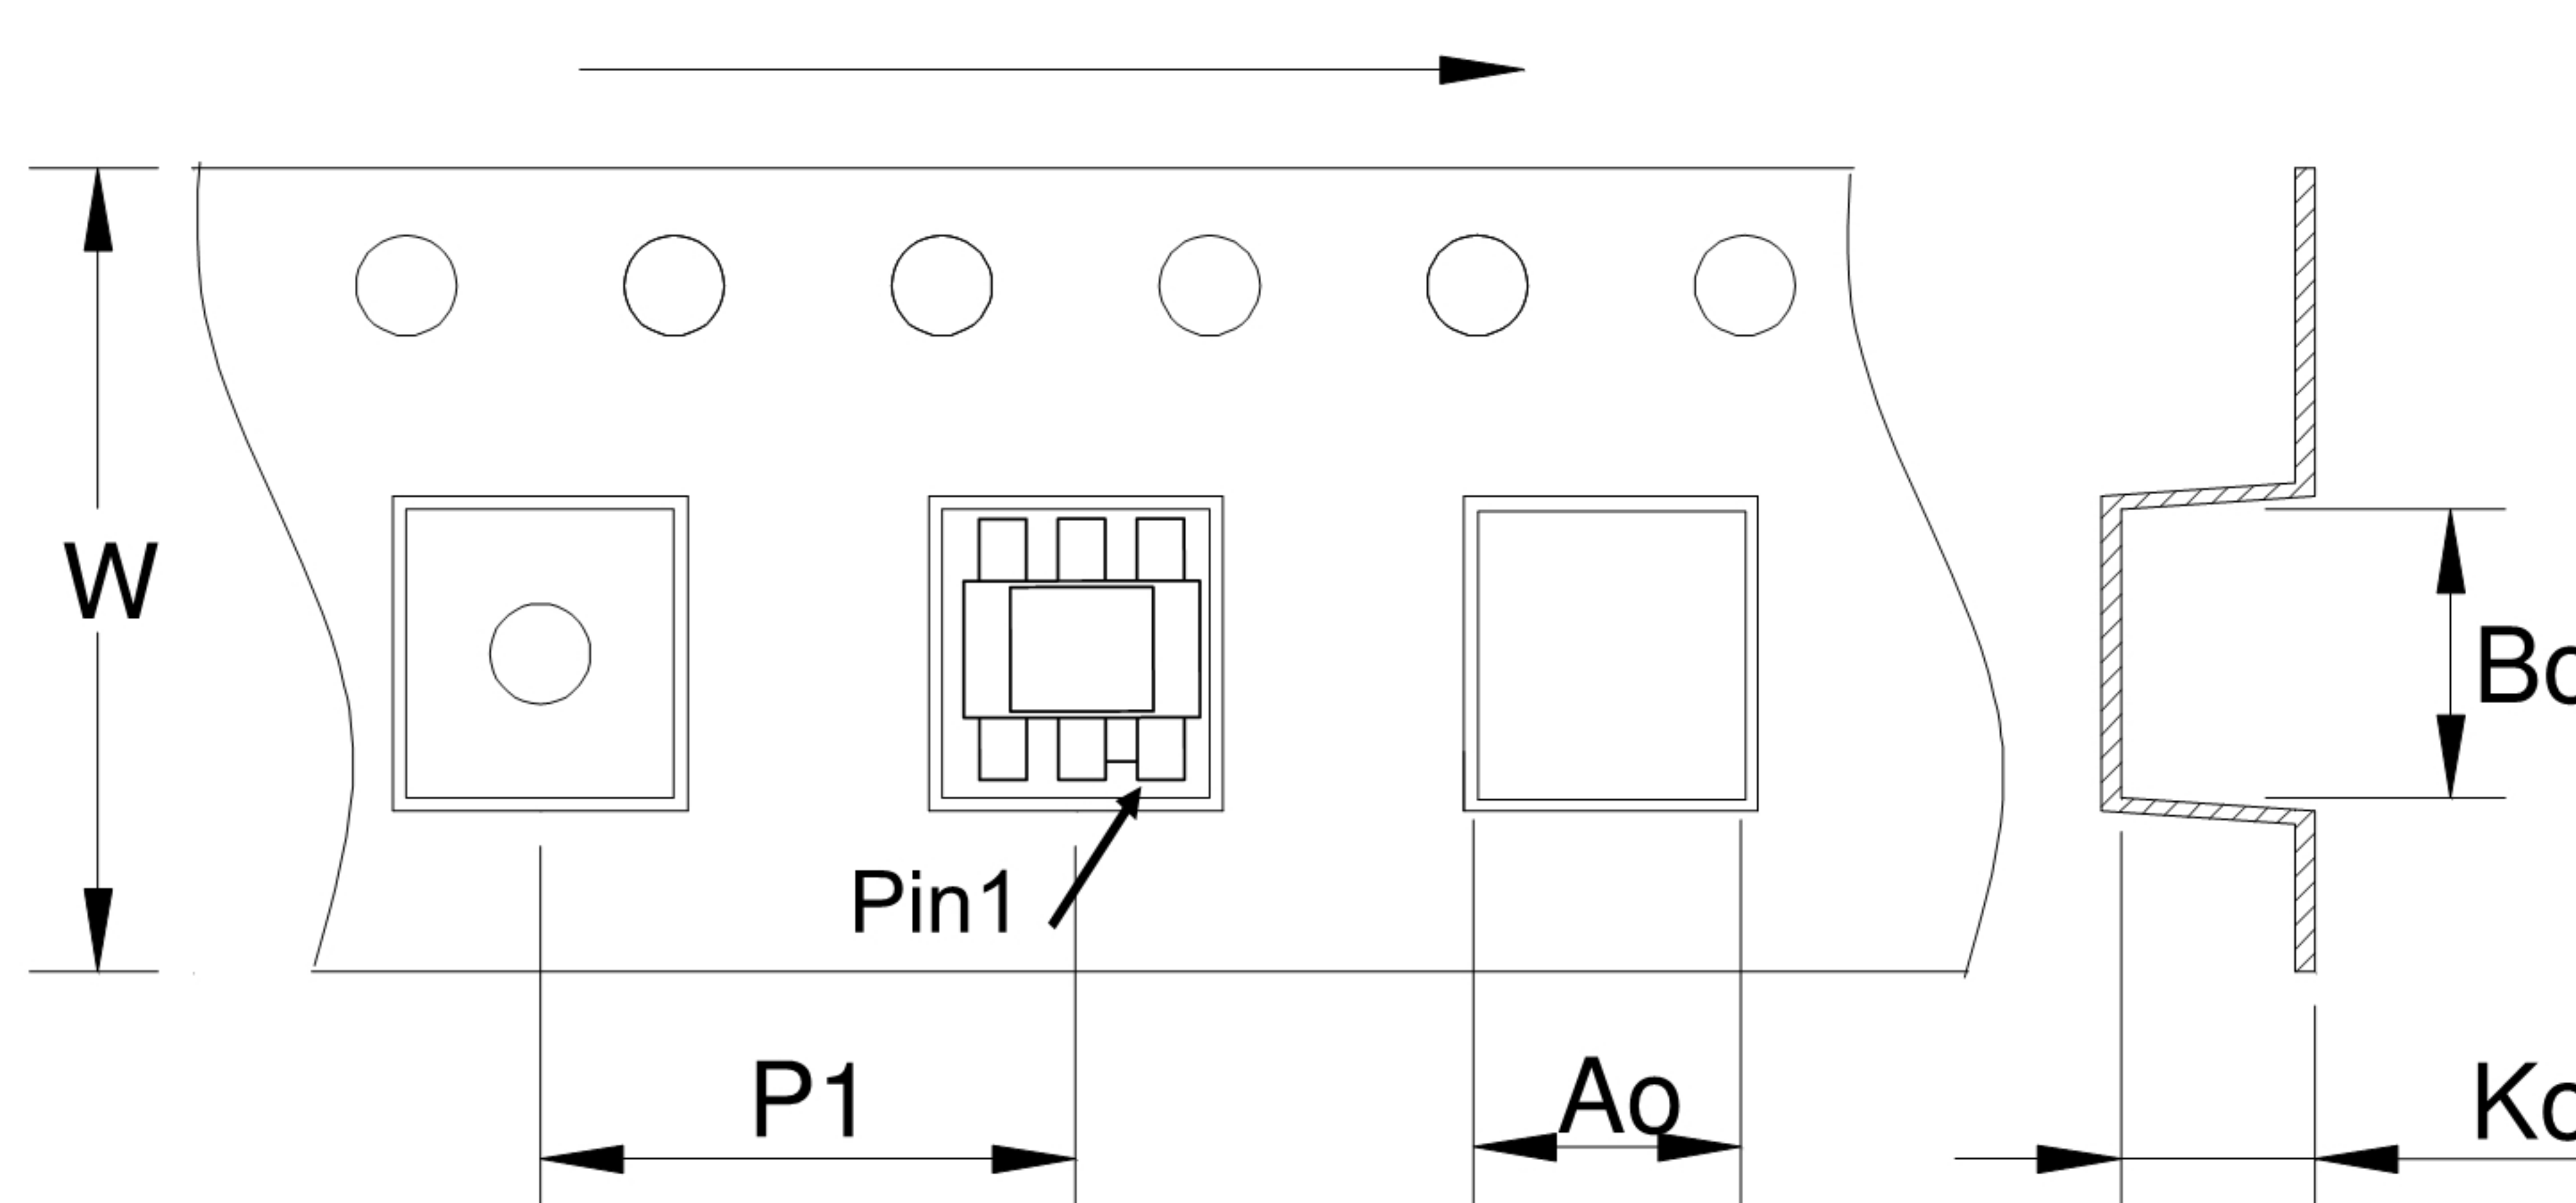

### Tape & Reel Information

Parameter	Units	Value
Qty per reel	PCS	2000
Reel Size	mm	330
Tape Width	mm	12.00
Pitch	mm	8.00
Ao	mm	4.50
Bo	mm	4.50
Ko	mm	3.20

