

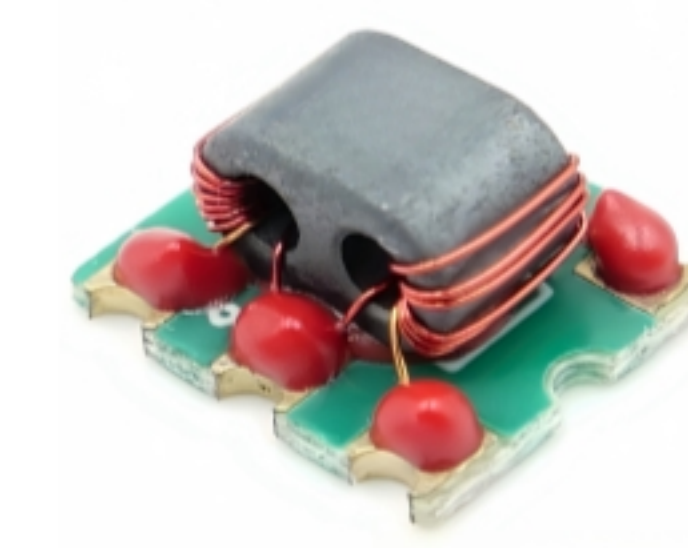


DBLF2-63-I+ 射频巴伦变压器

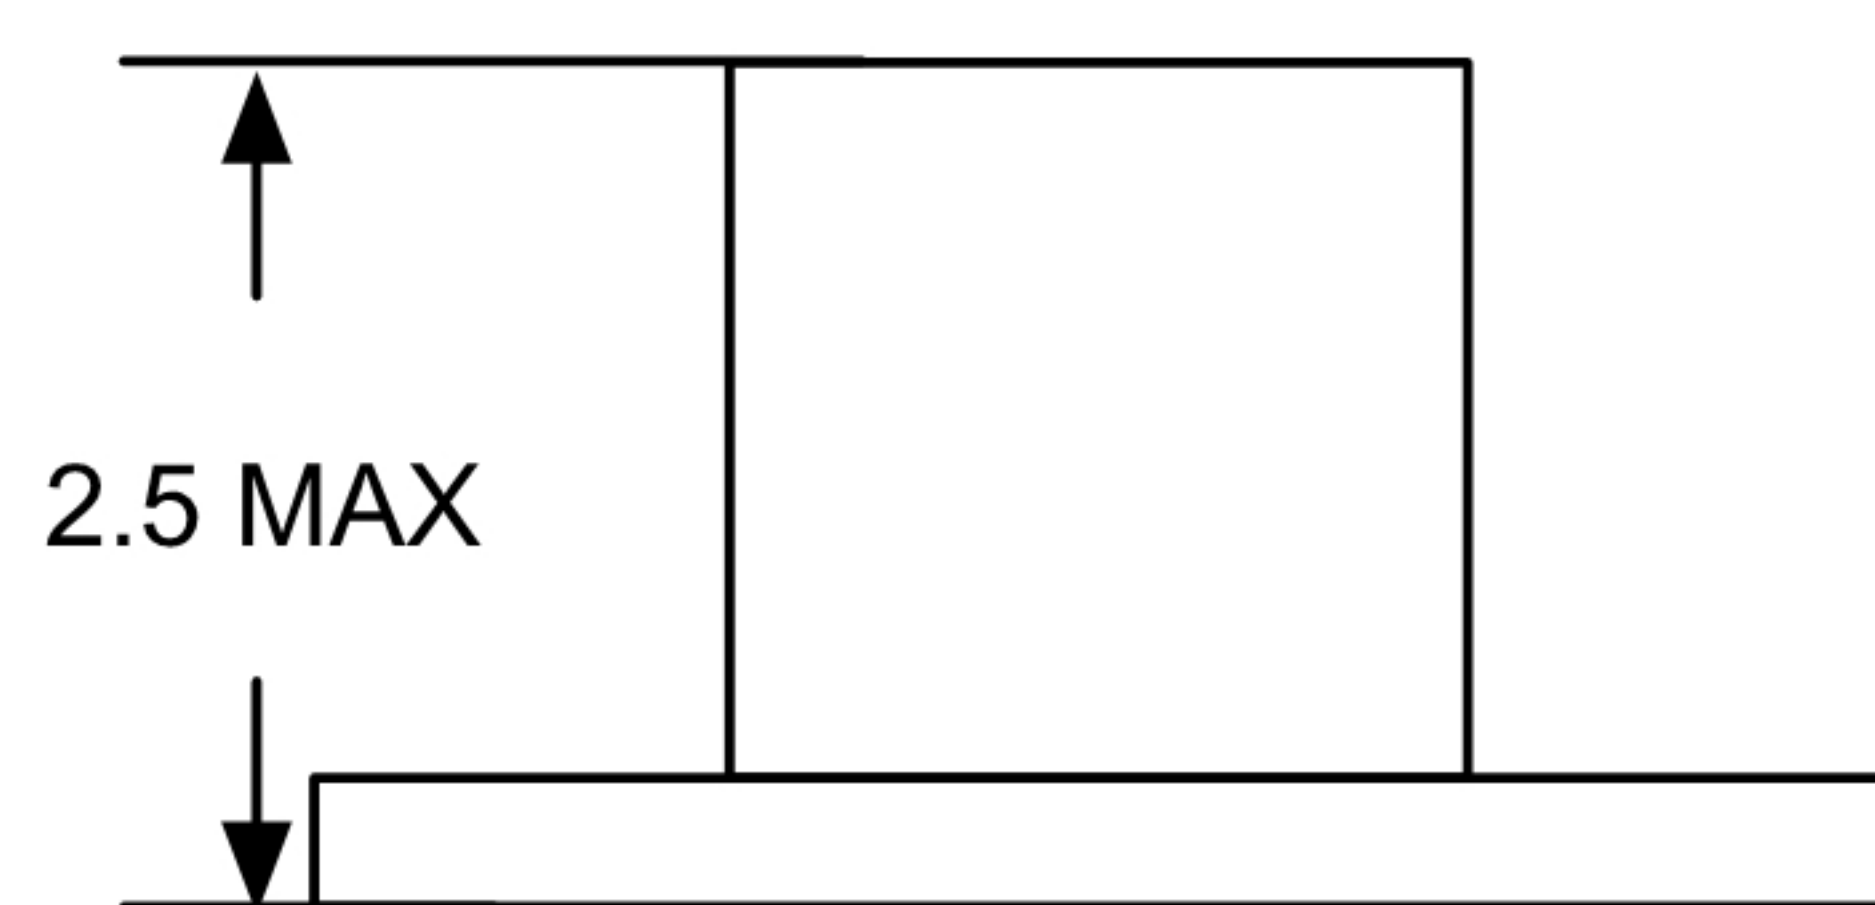


50Ω 1:2 Transmission Line Transformer
30-6000MHz

Outline Drawing(mm)

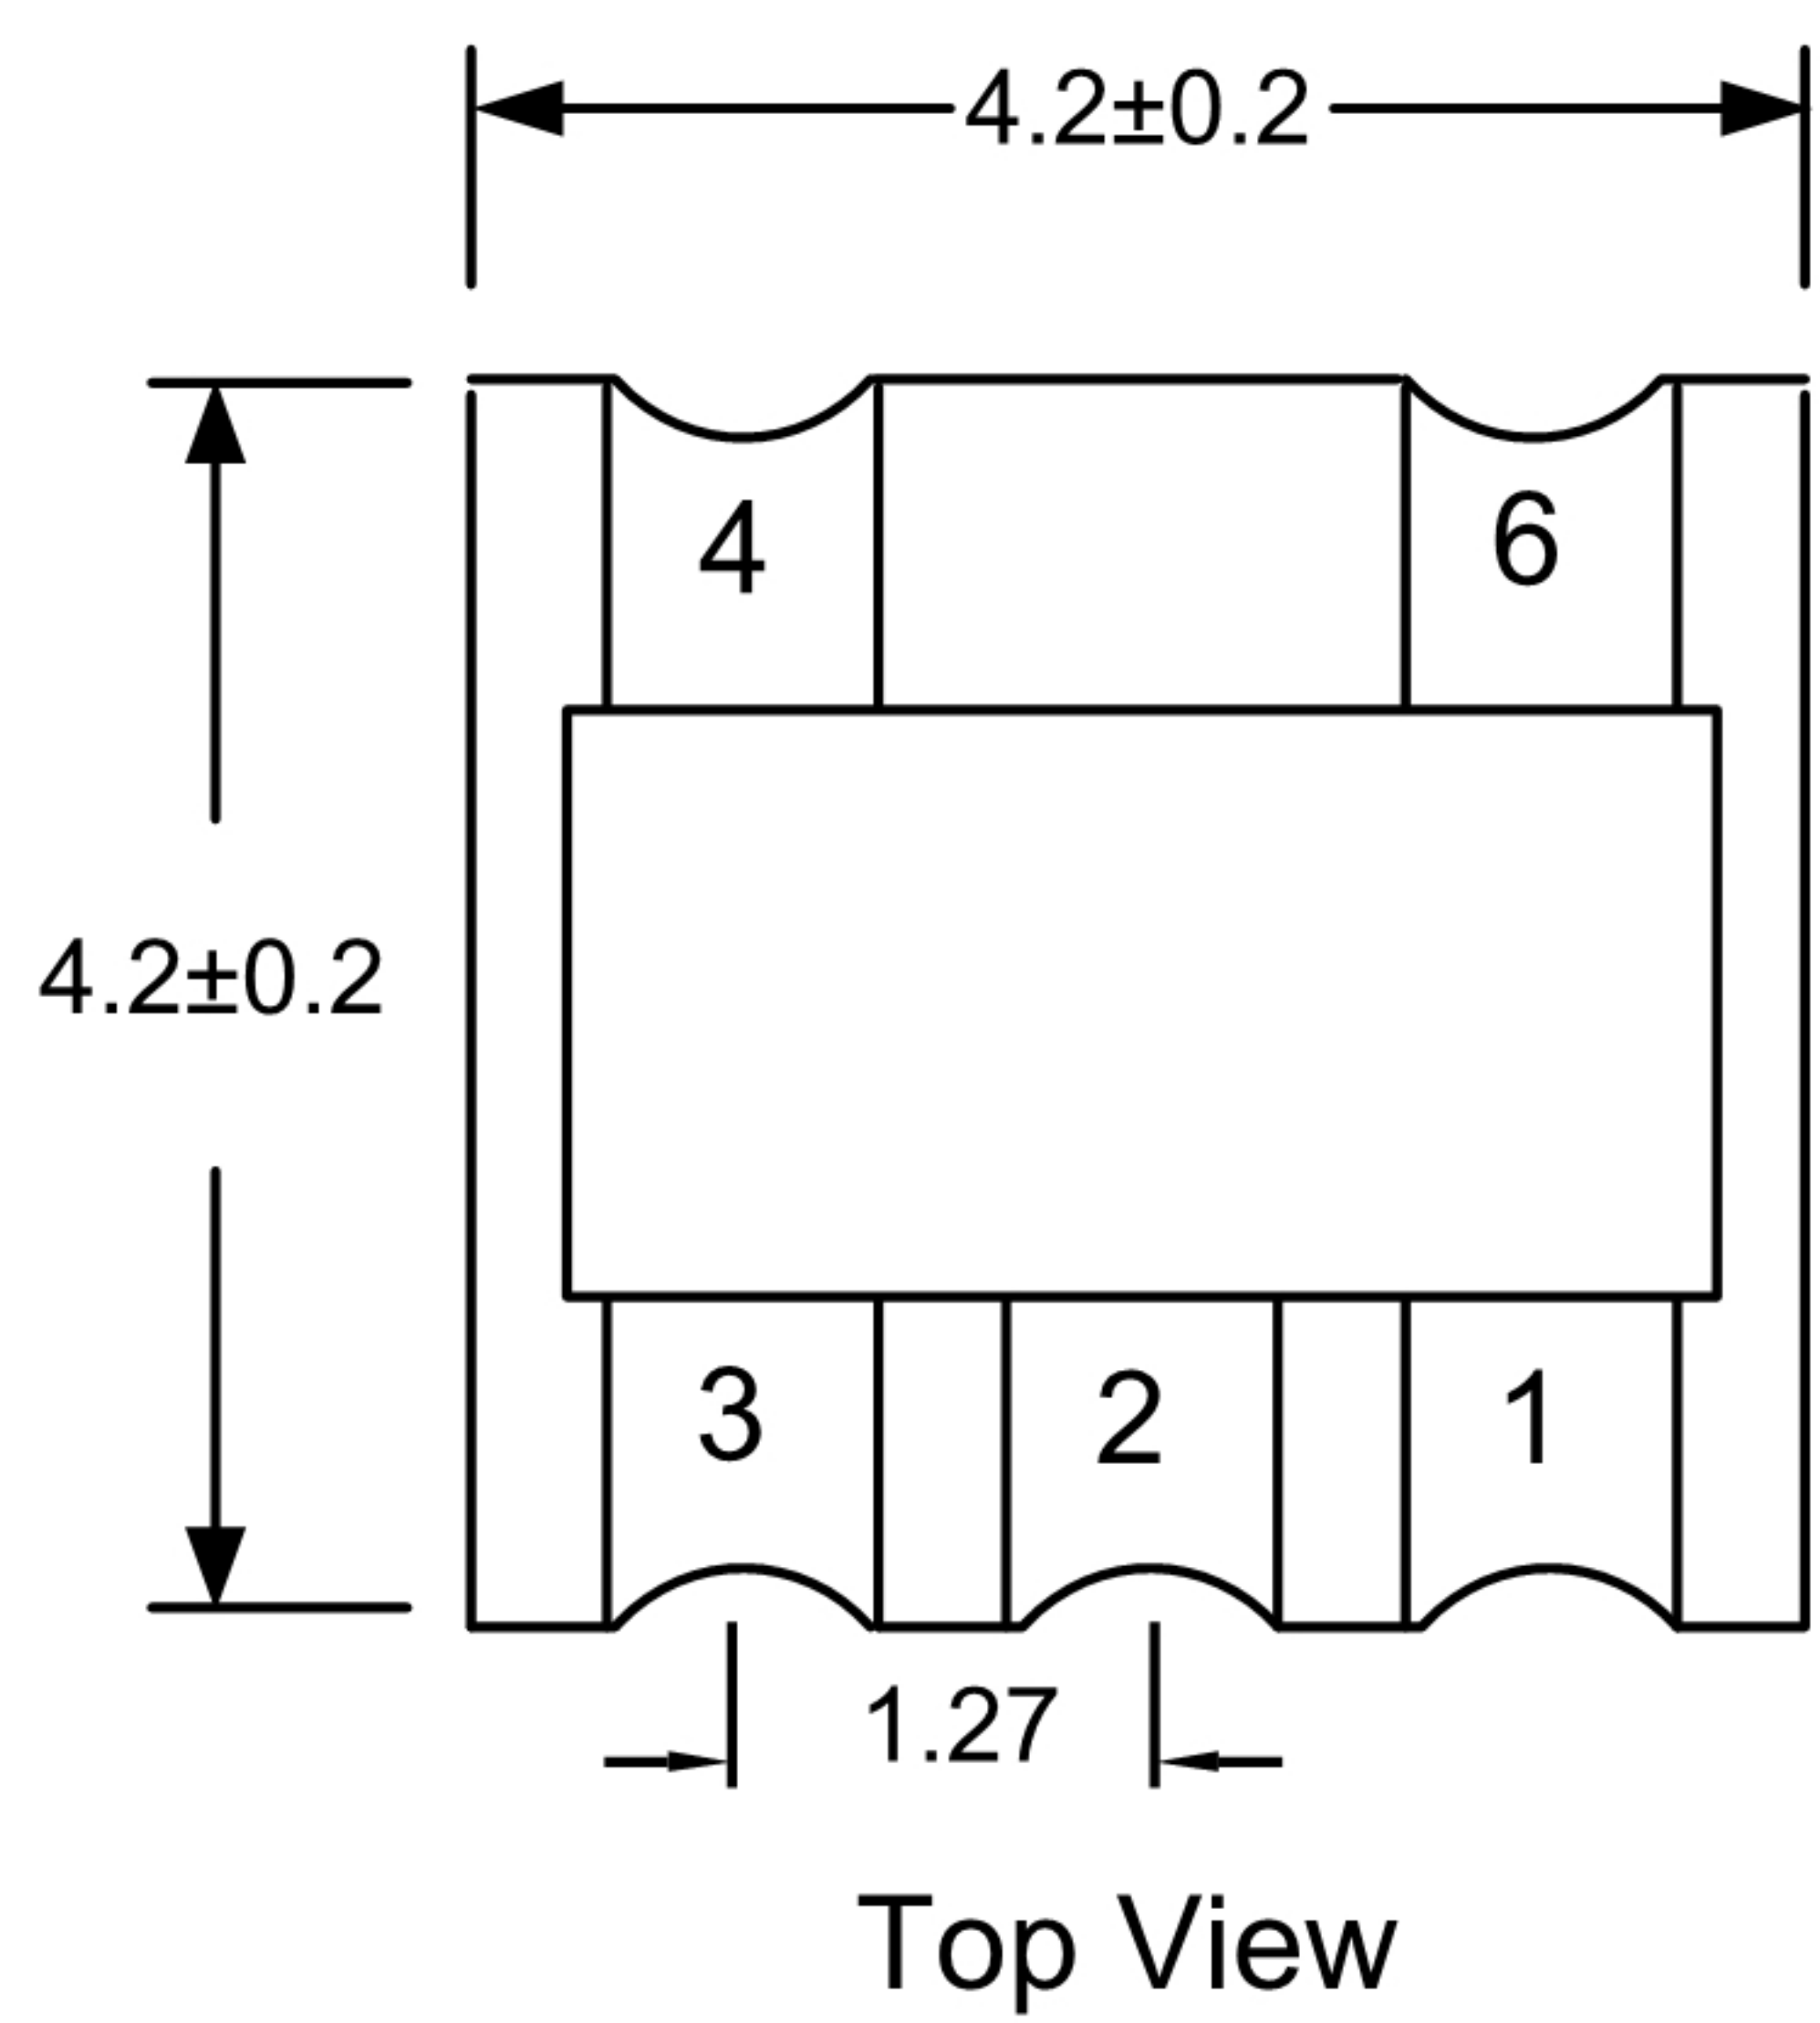


Electrical structure

Fig G

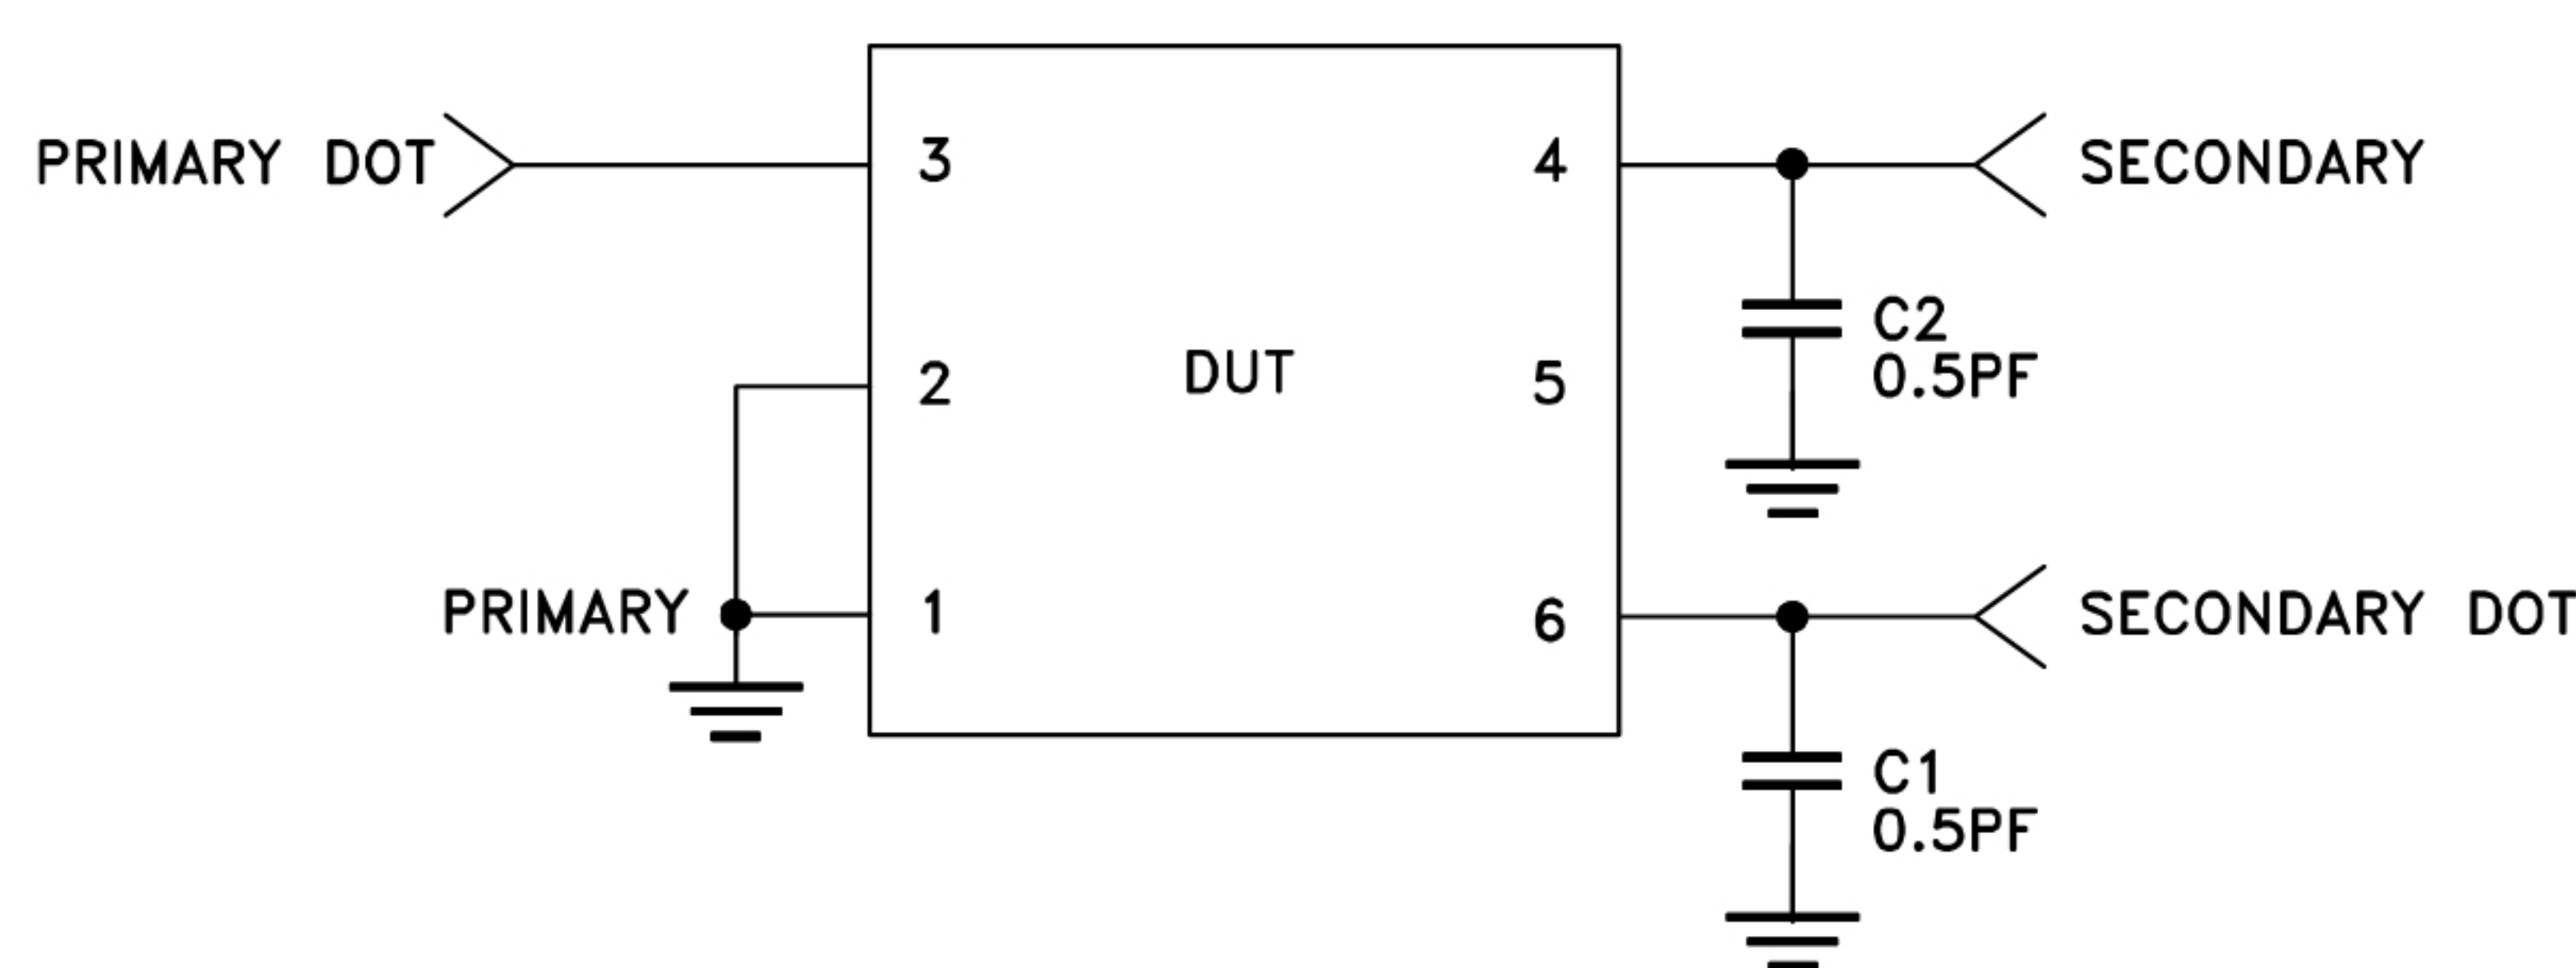

Recommended layout(mm)

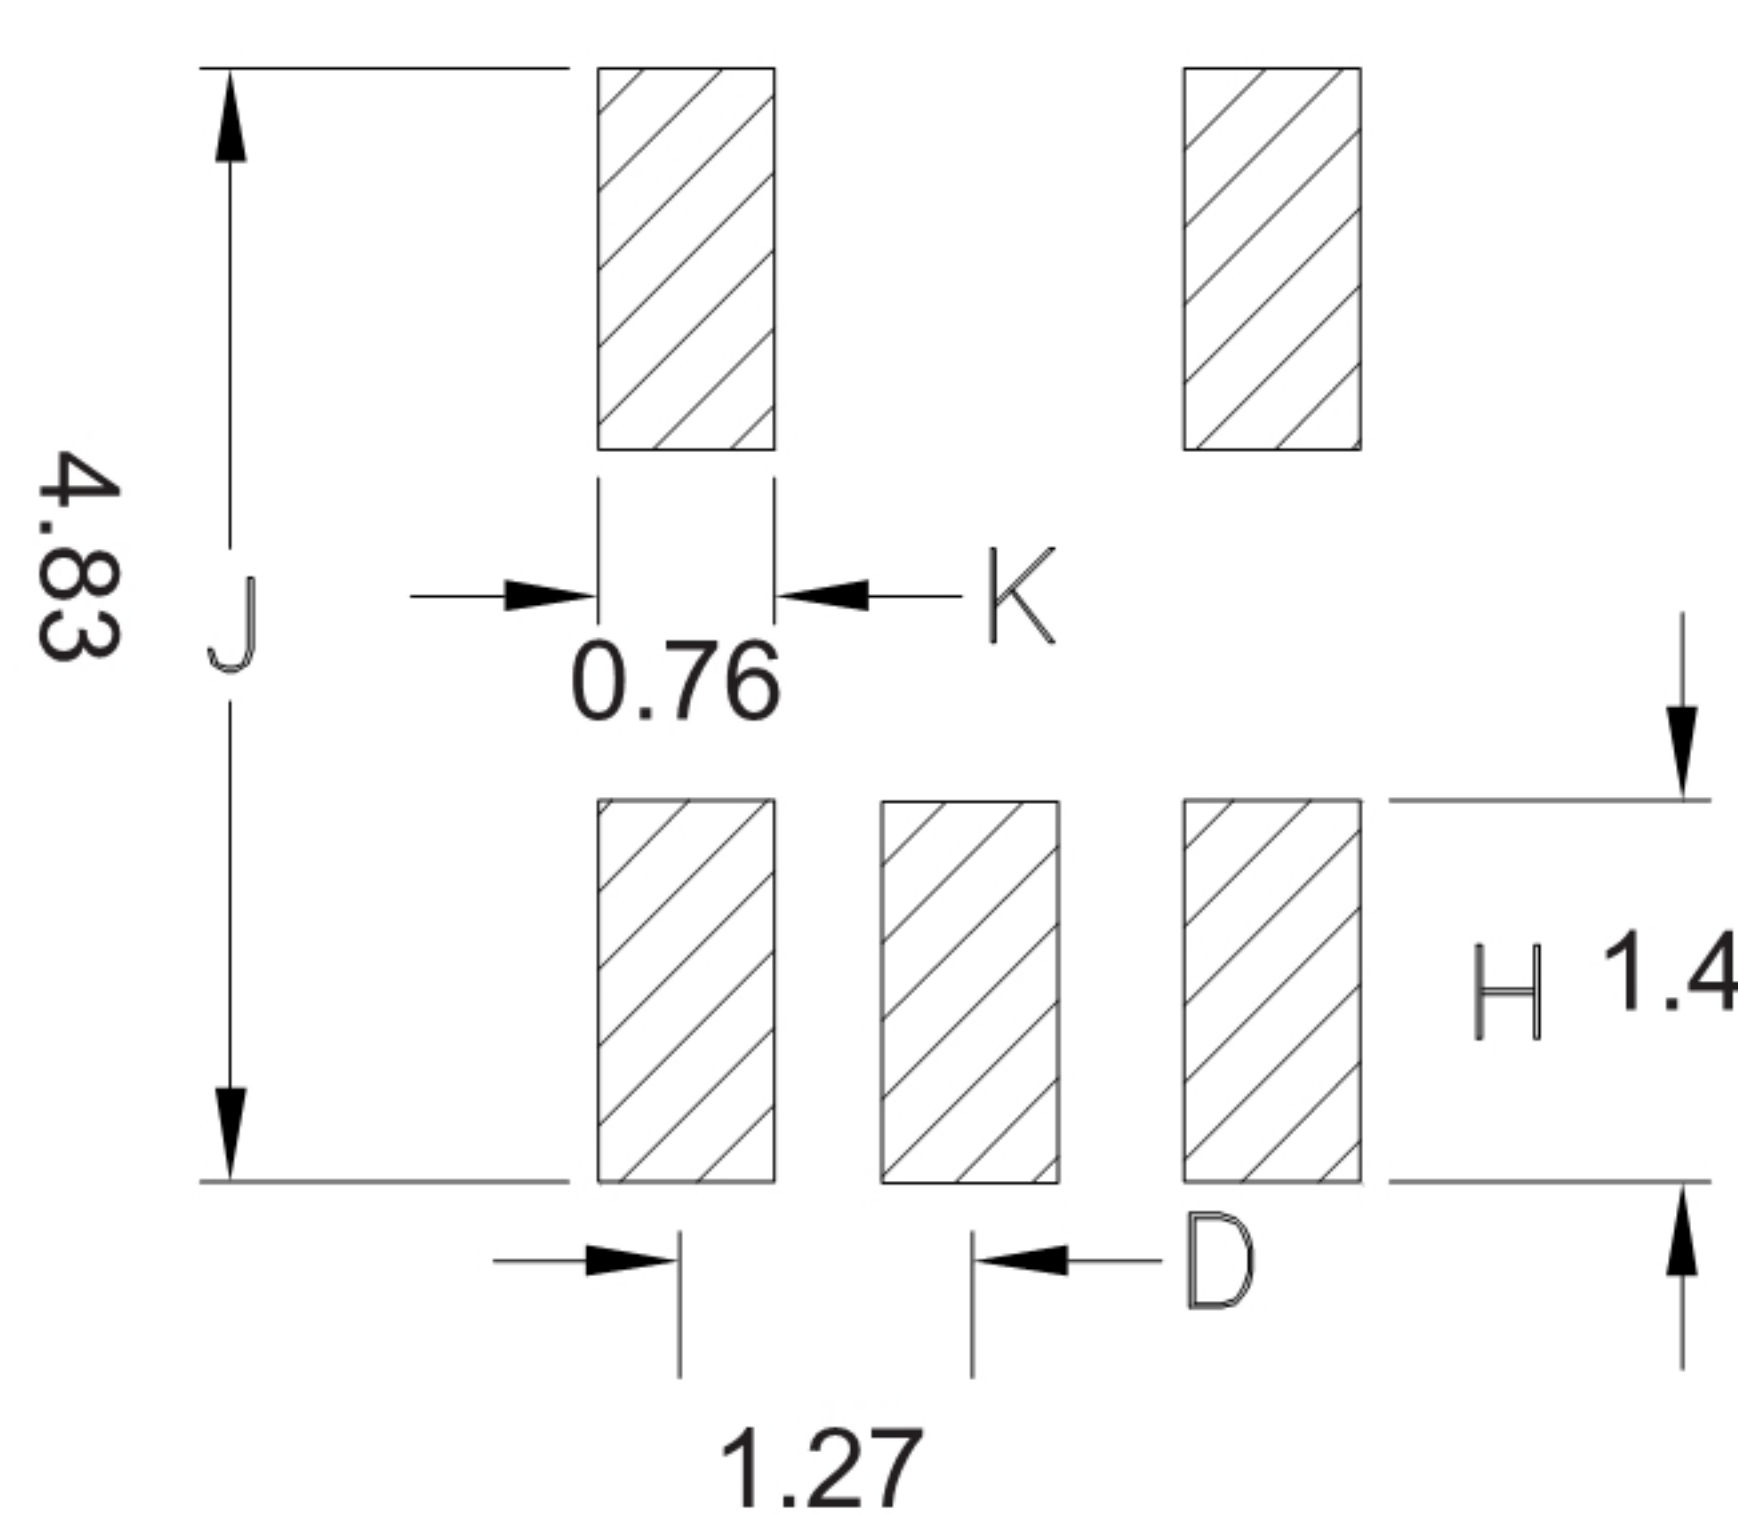

Pin Connections

Input	3
Output 1	4
Output 2	6
Ground	2, 1

Features





- Operating temperature range: -40°C to +85°C
- Storage temperature range: -55°C to +100°C
- 260°C Reflow Compatible
- RoHS compliant and lead free
- Input Power: 400mW
- DC Current: 30mA

Applications


- For Motorola Walkie-talkie.
- For Car Streaming Media Rearview Mirror.
- For Broadband and Wireless Communications.
- For Wireless Microphone & Marine Communications.
- For Ideally Suited LTE, Cellular, UMTS, WiFi, WiMAX.
- For Differential Modulator/demodulator and Active Mixers.

Electrical Specifications: TA=25°C, 0dBm, Z0=50Ω

Parameter	Test Conditions	Units	Min	Typ	Max
Main line Loss (Pin3-4)	30-6000MHz	dB	—	3.0	3.5
Main line Loss (Pin3-6)	30-6000MHz	dB	—	4.0	4.5
Amplitude Balance	30-6000MHz	dB	0.0	1.0	2.8
Phase Balance	30-6000MHz	°	0.0	10.0	20.0
Input Return Loss(Pin3)	30-6000MHz	dB	12.0	16.0	—

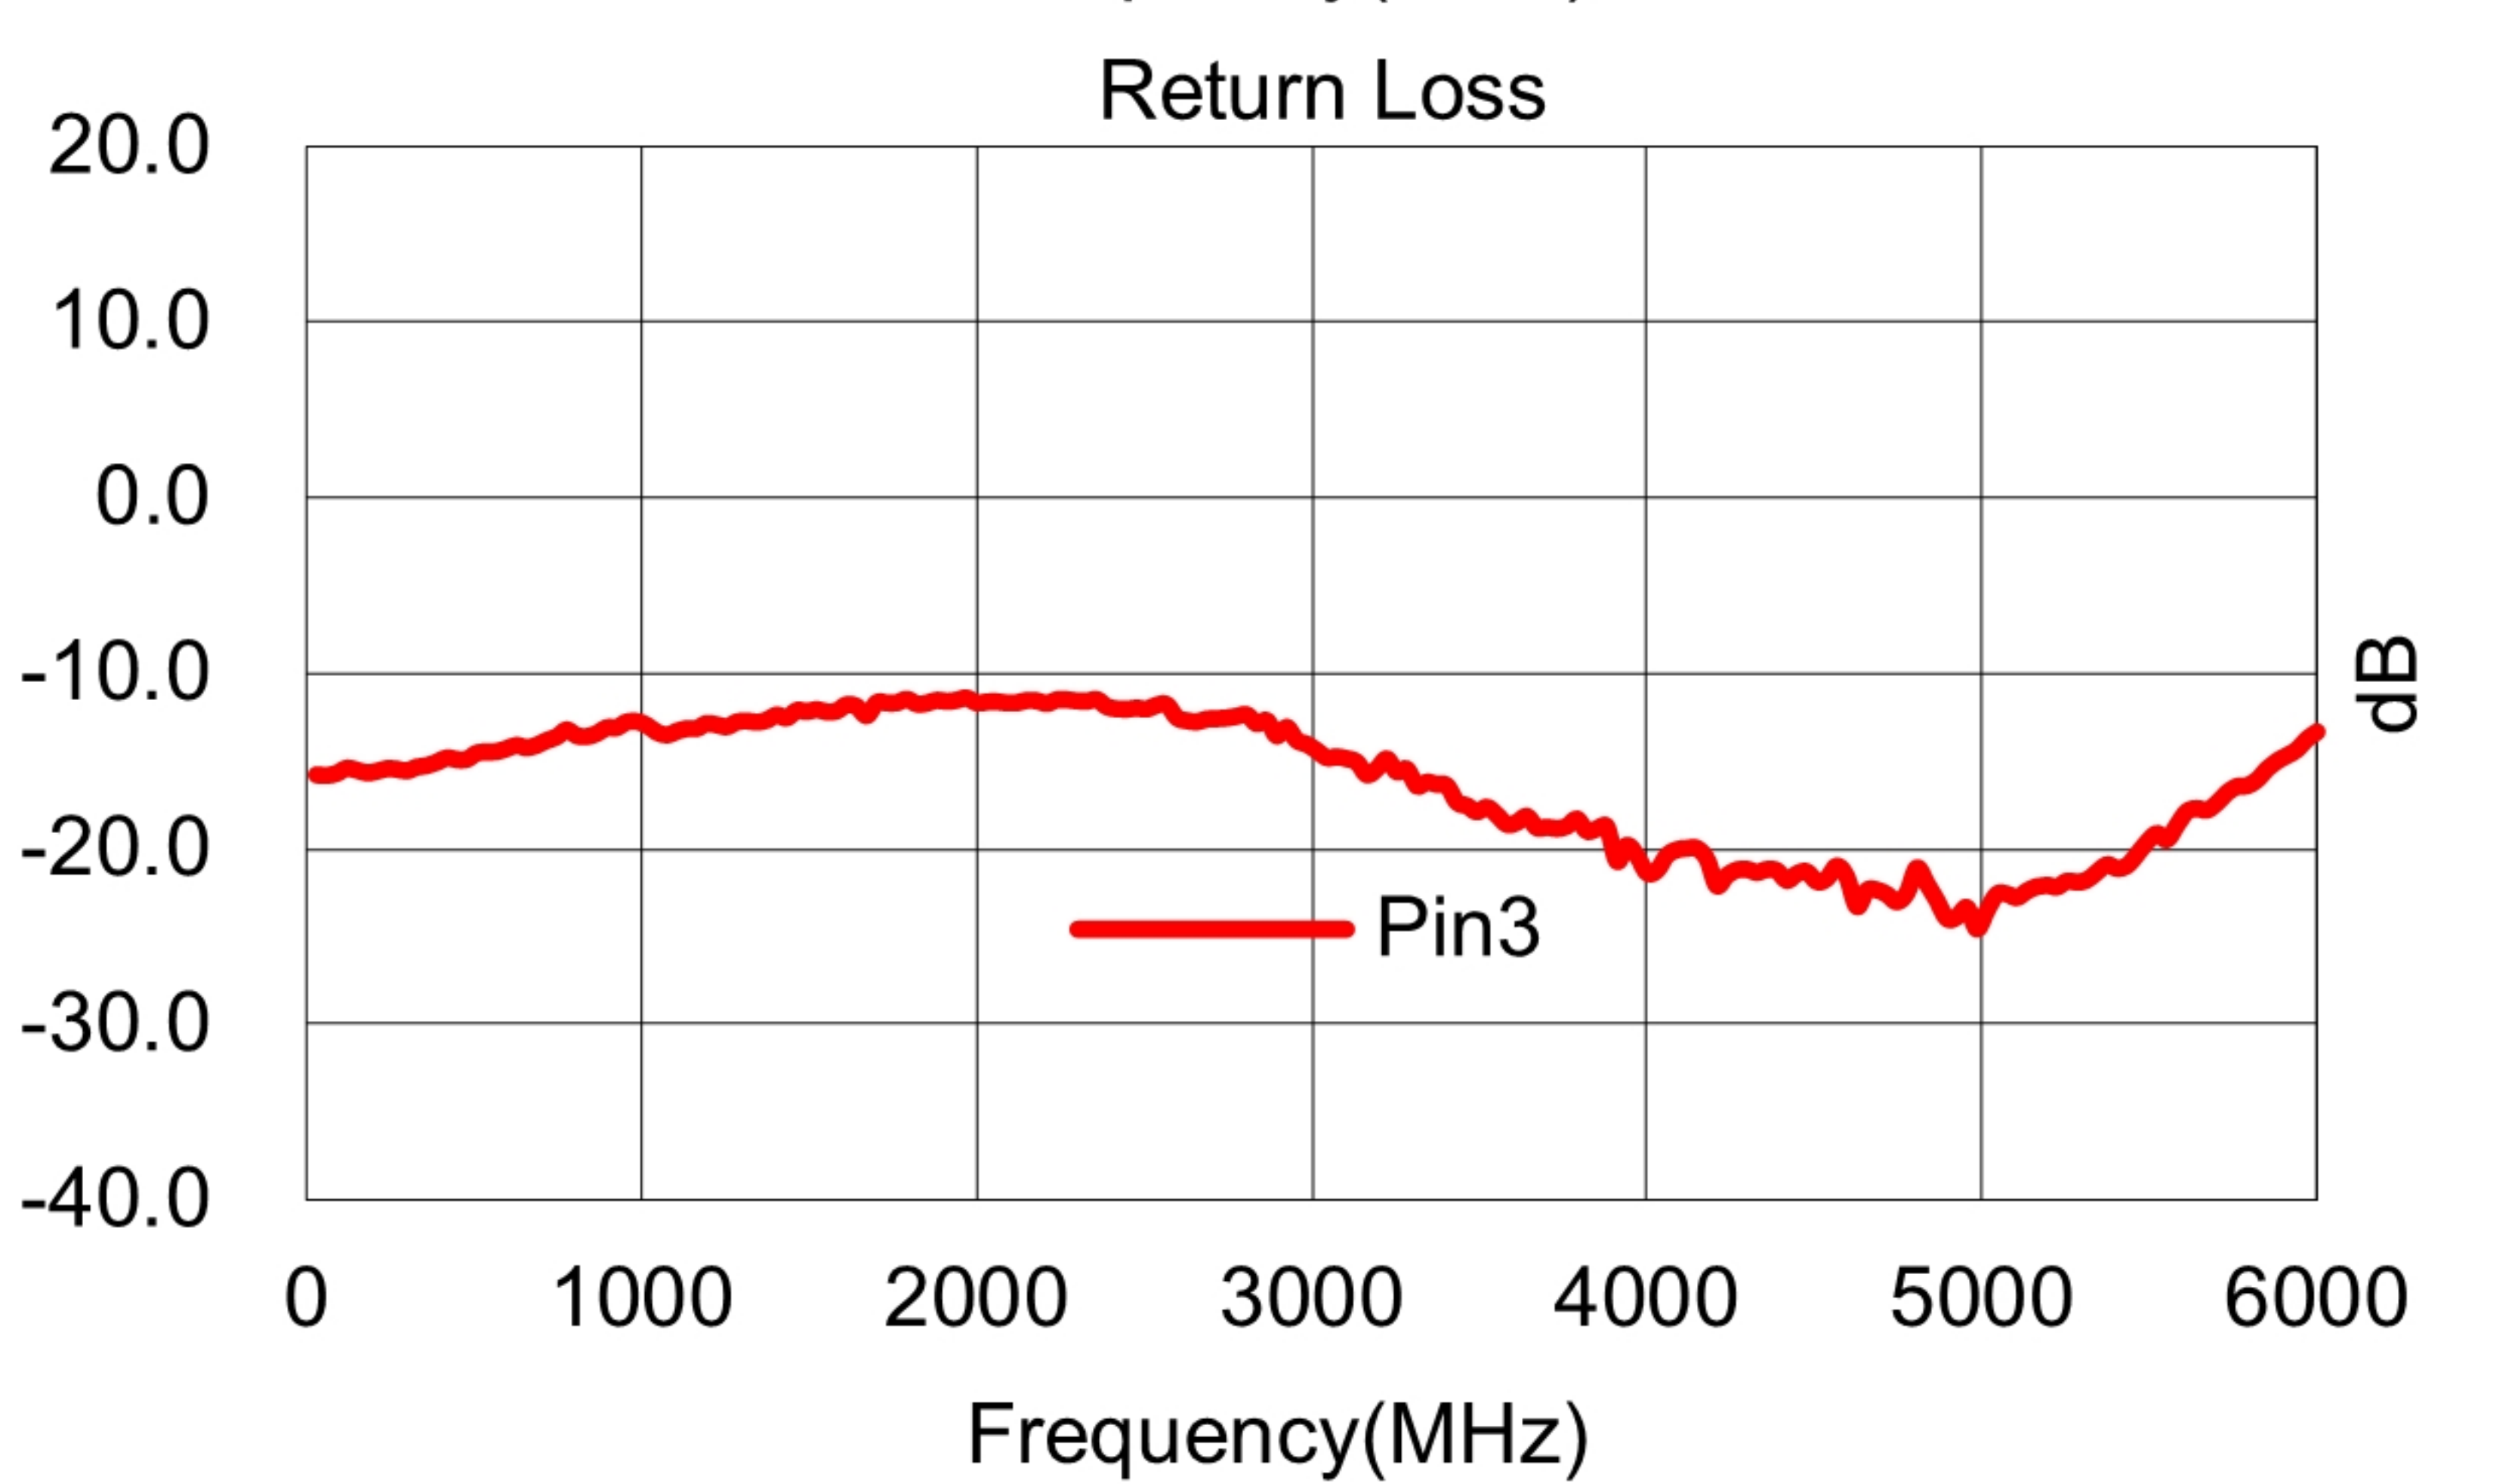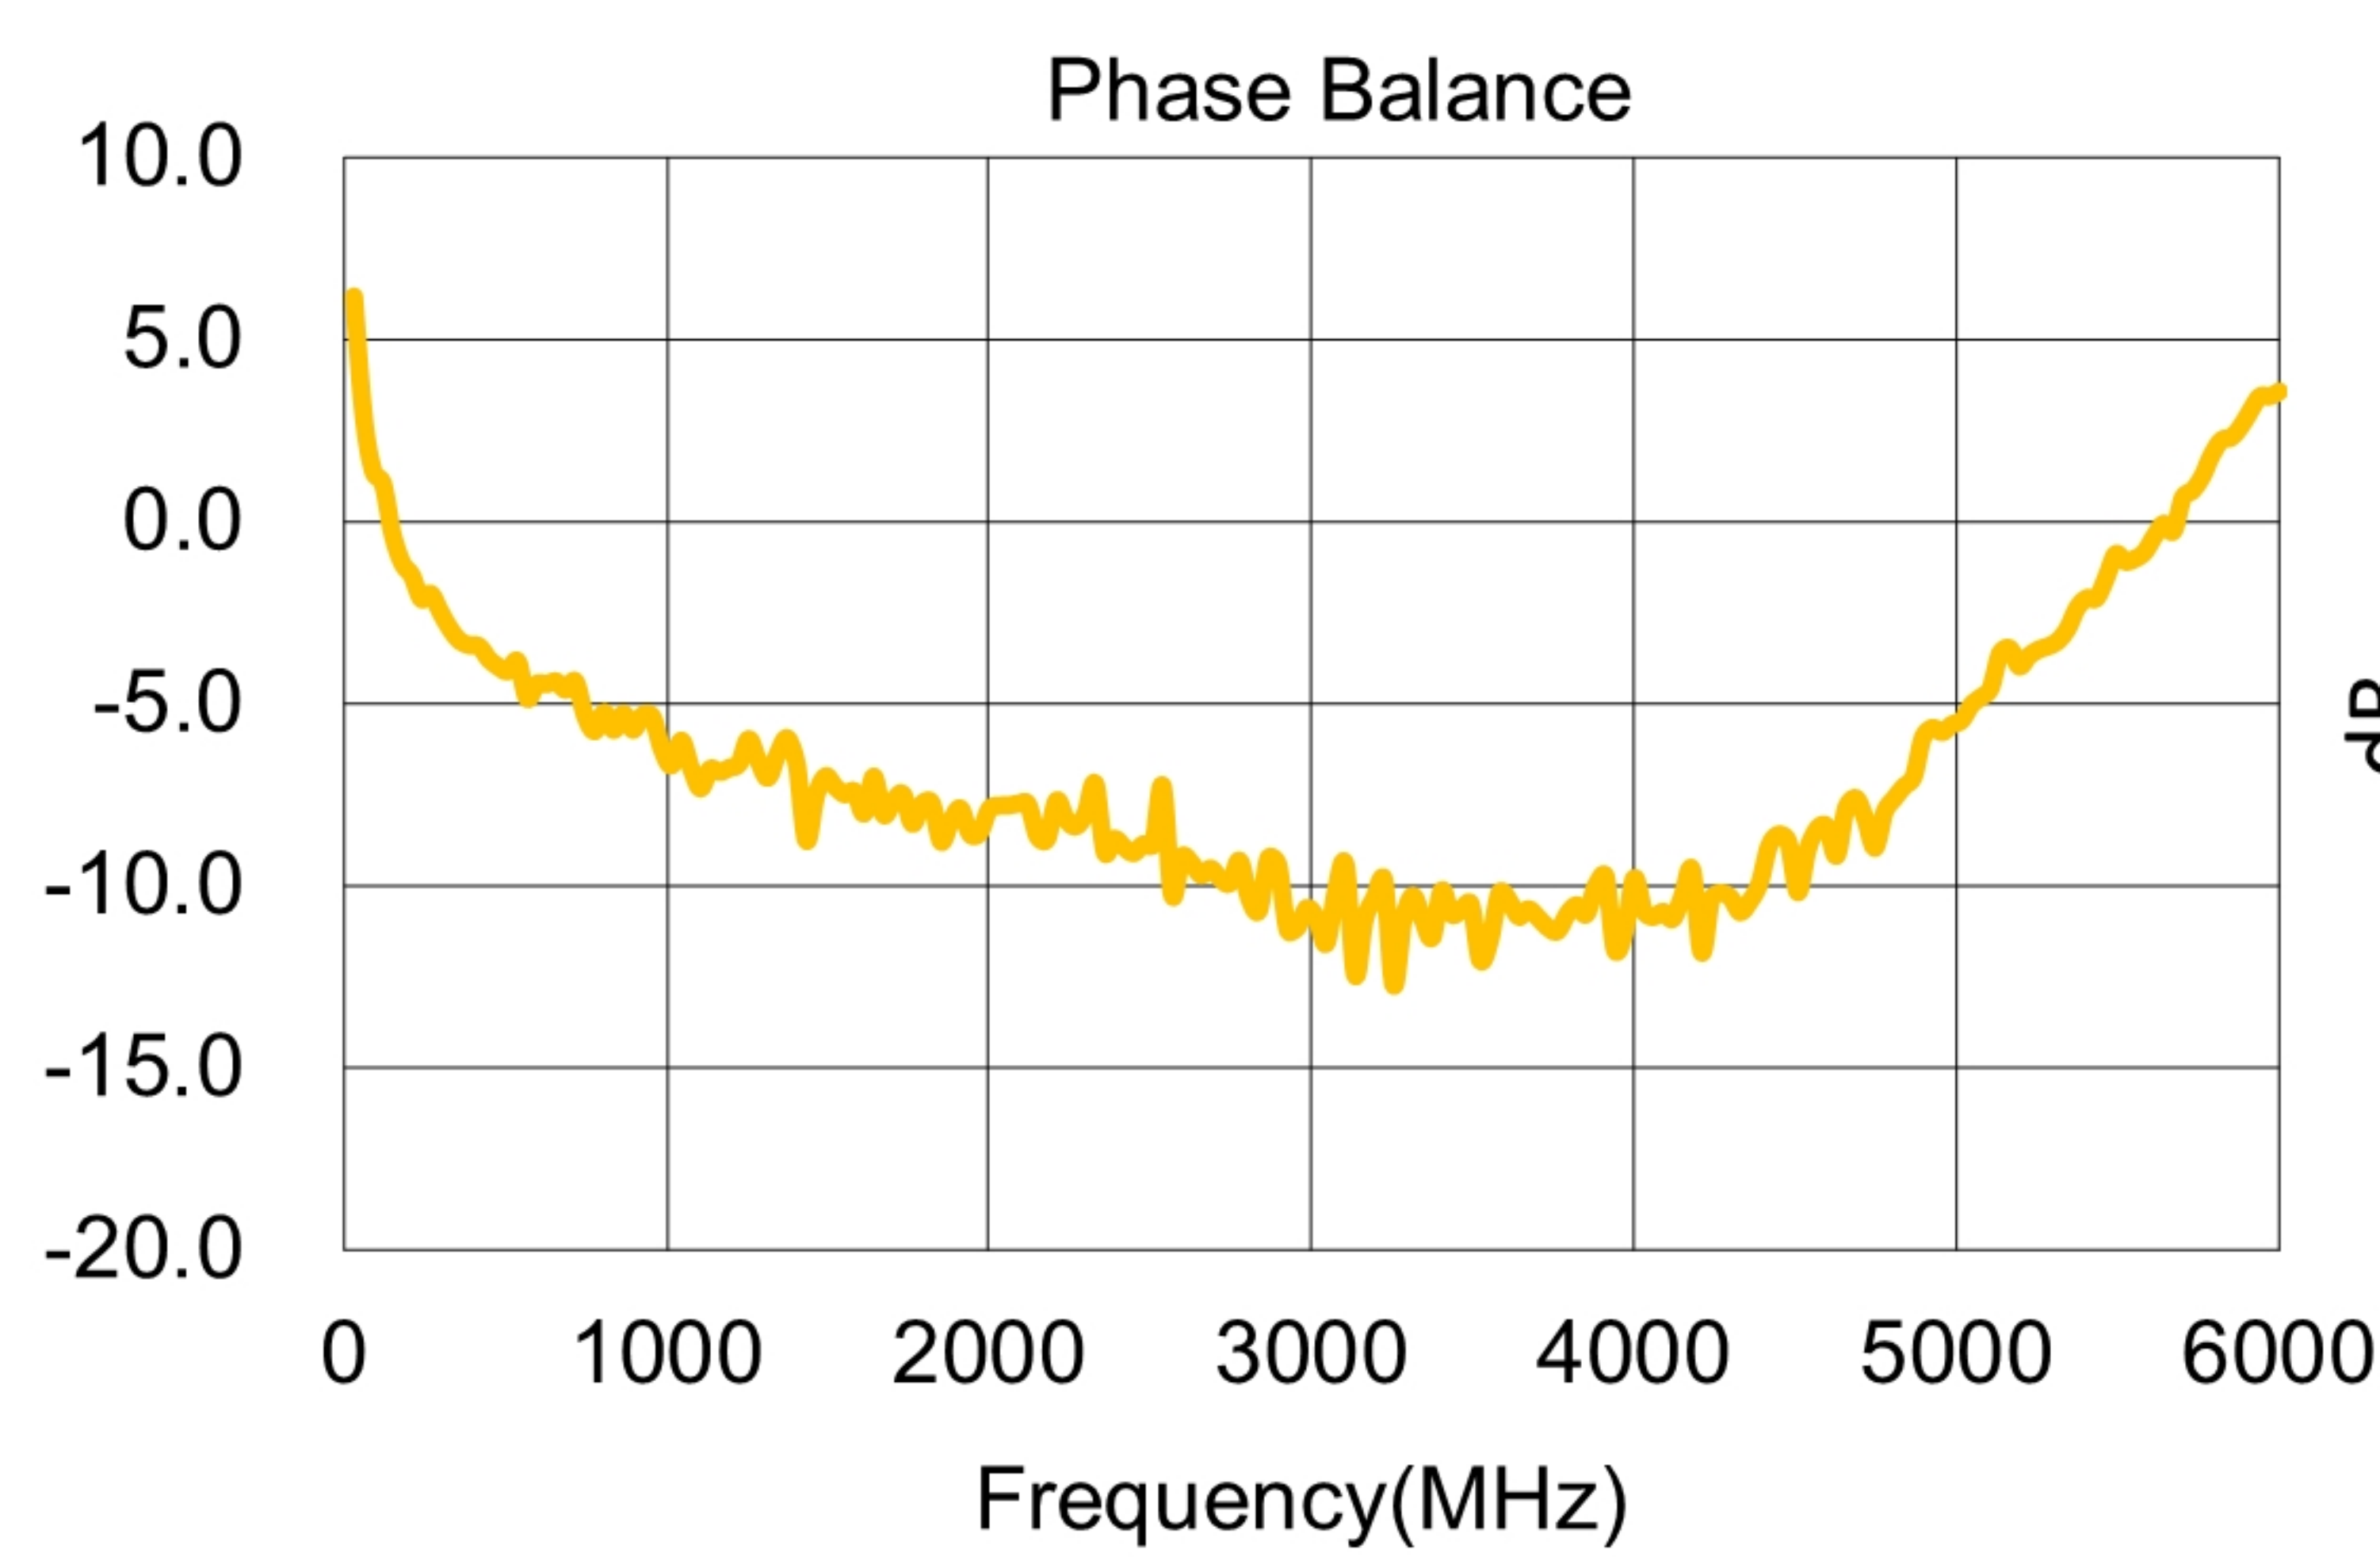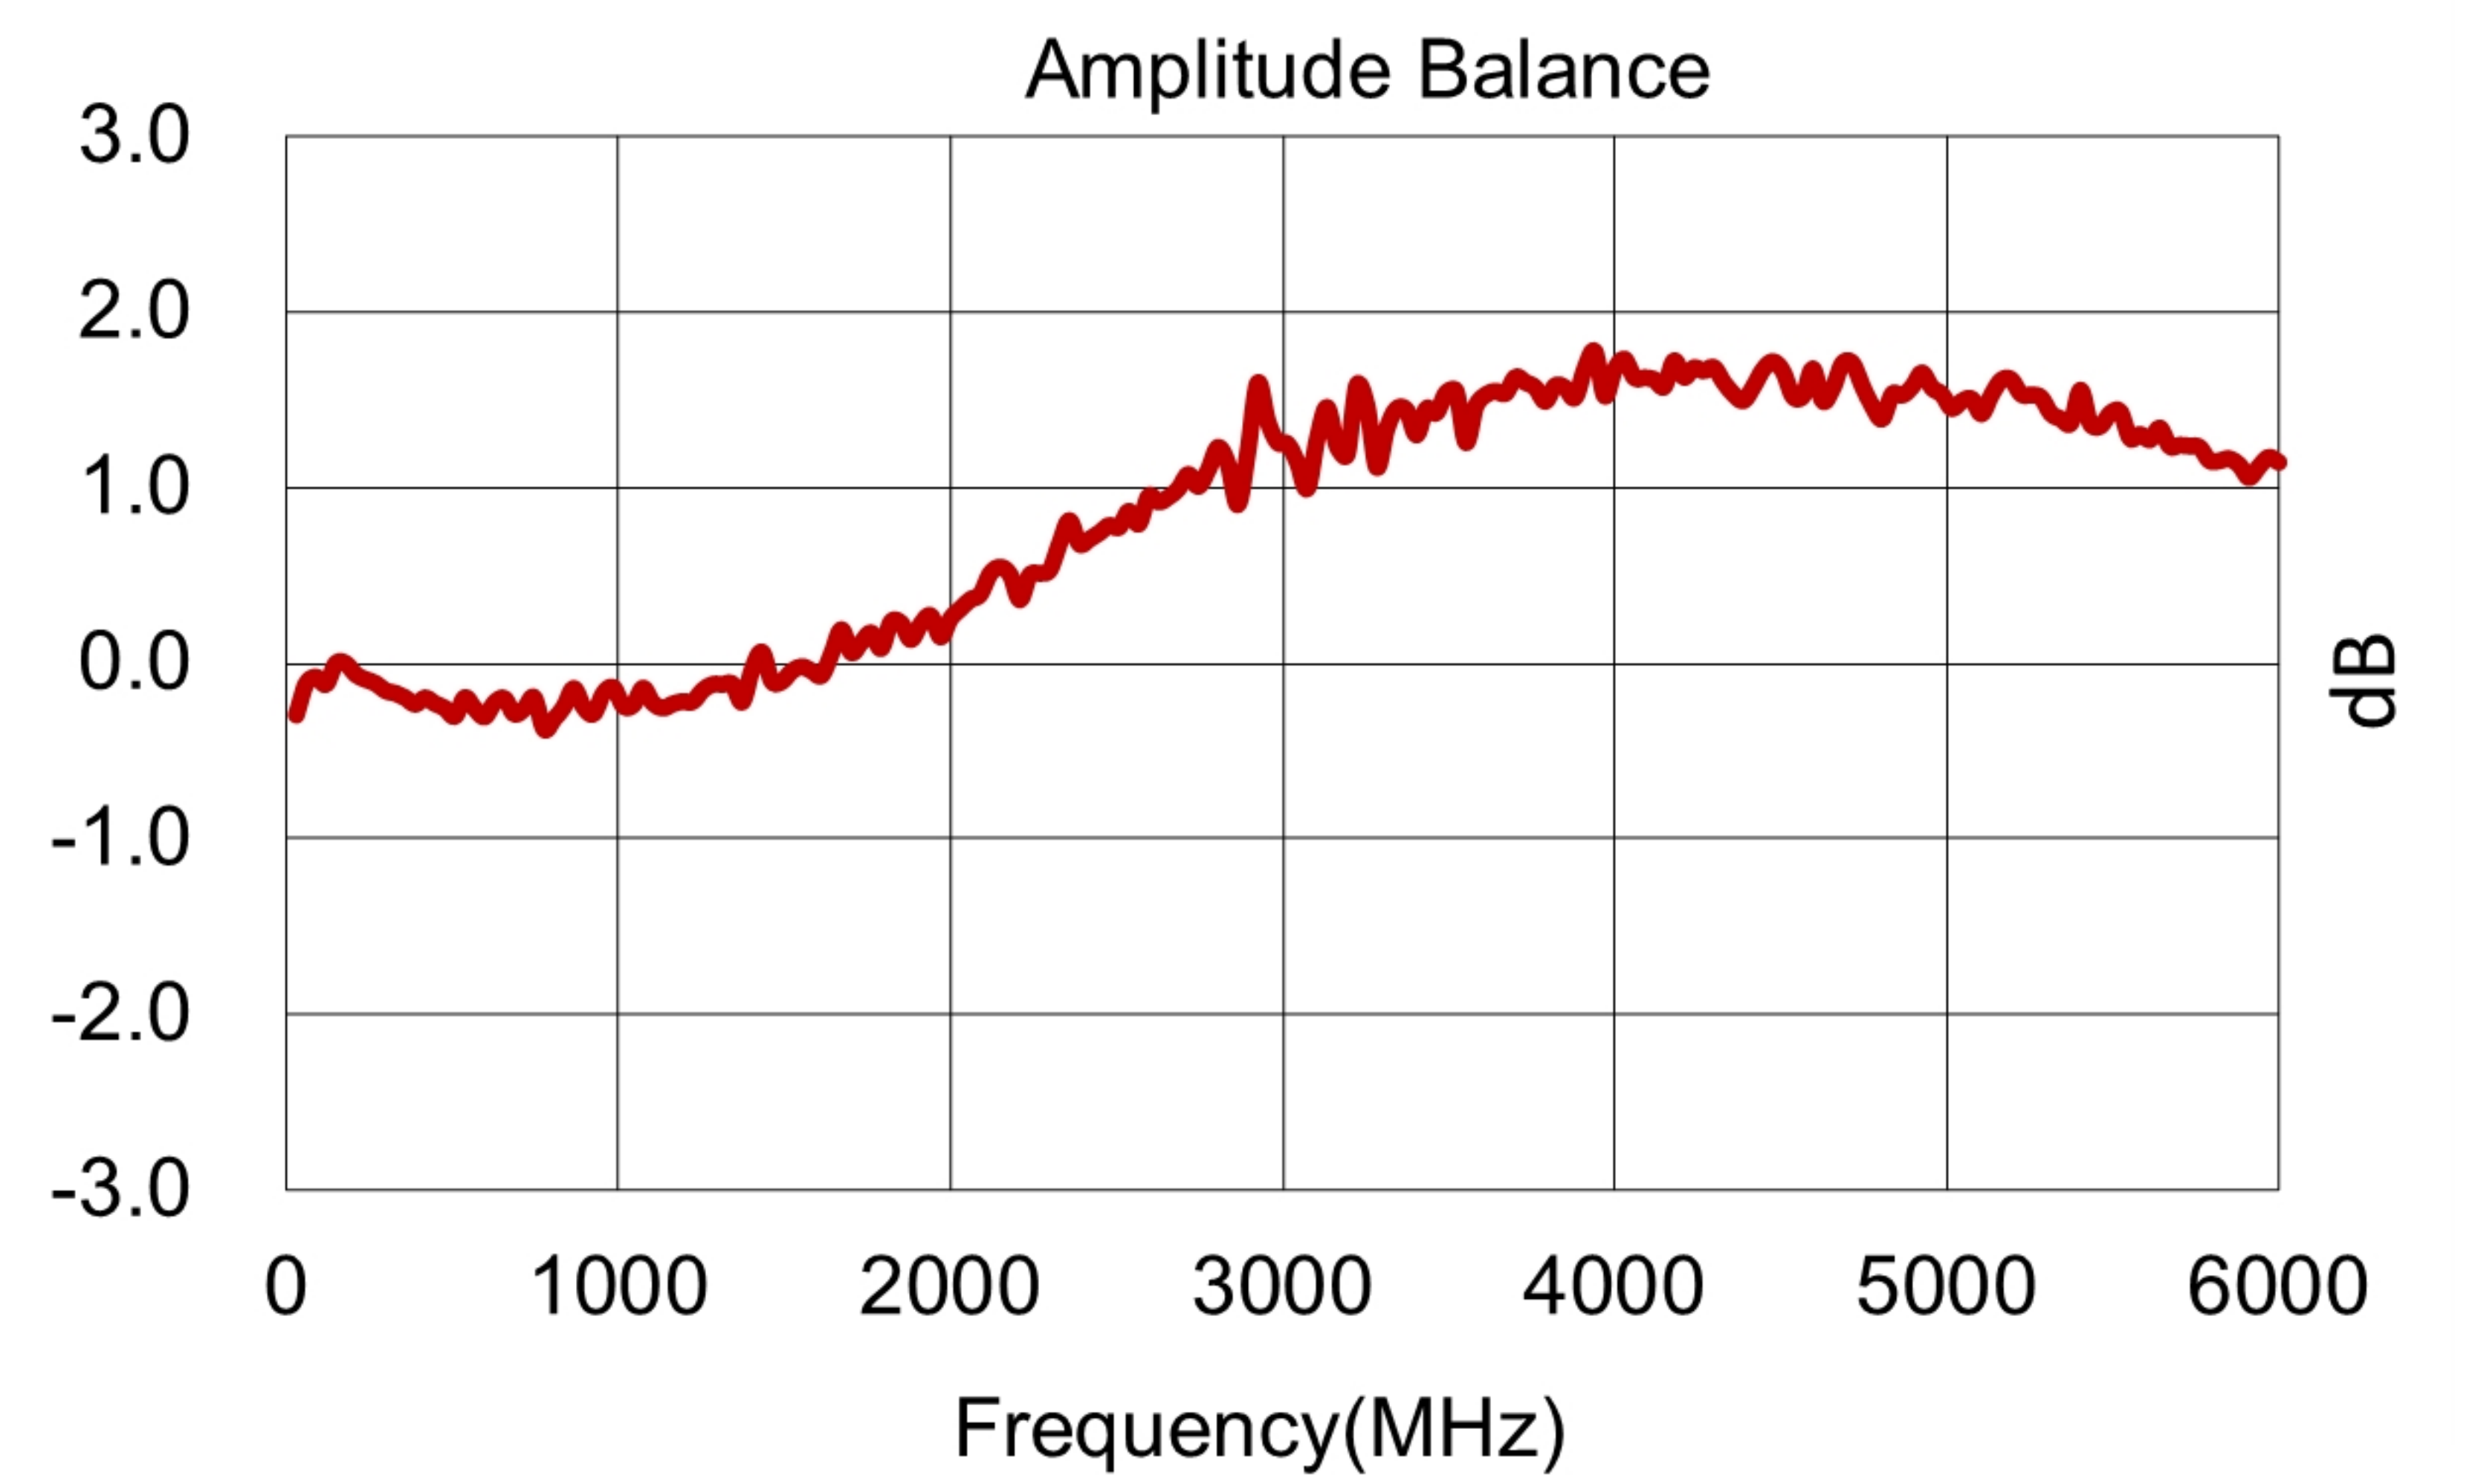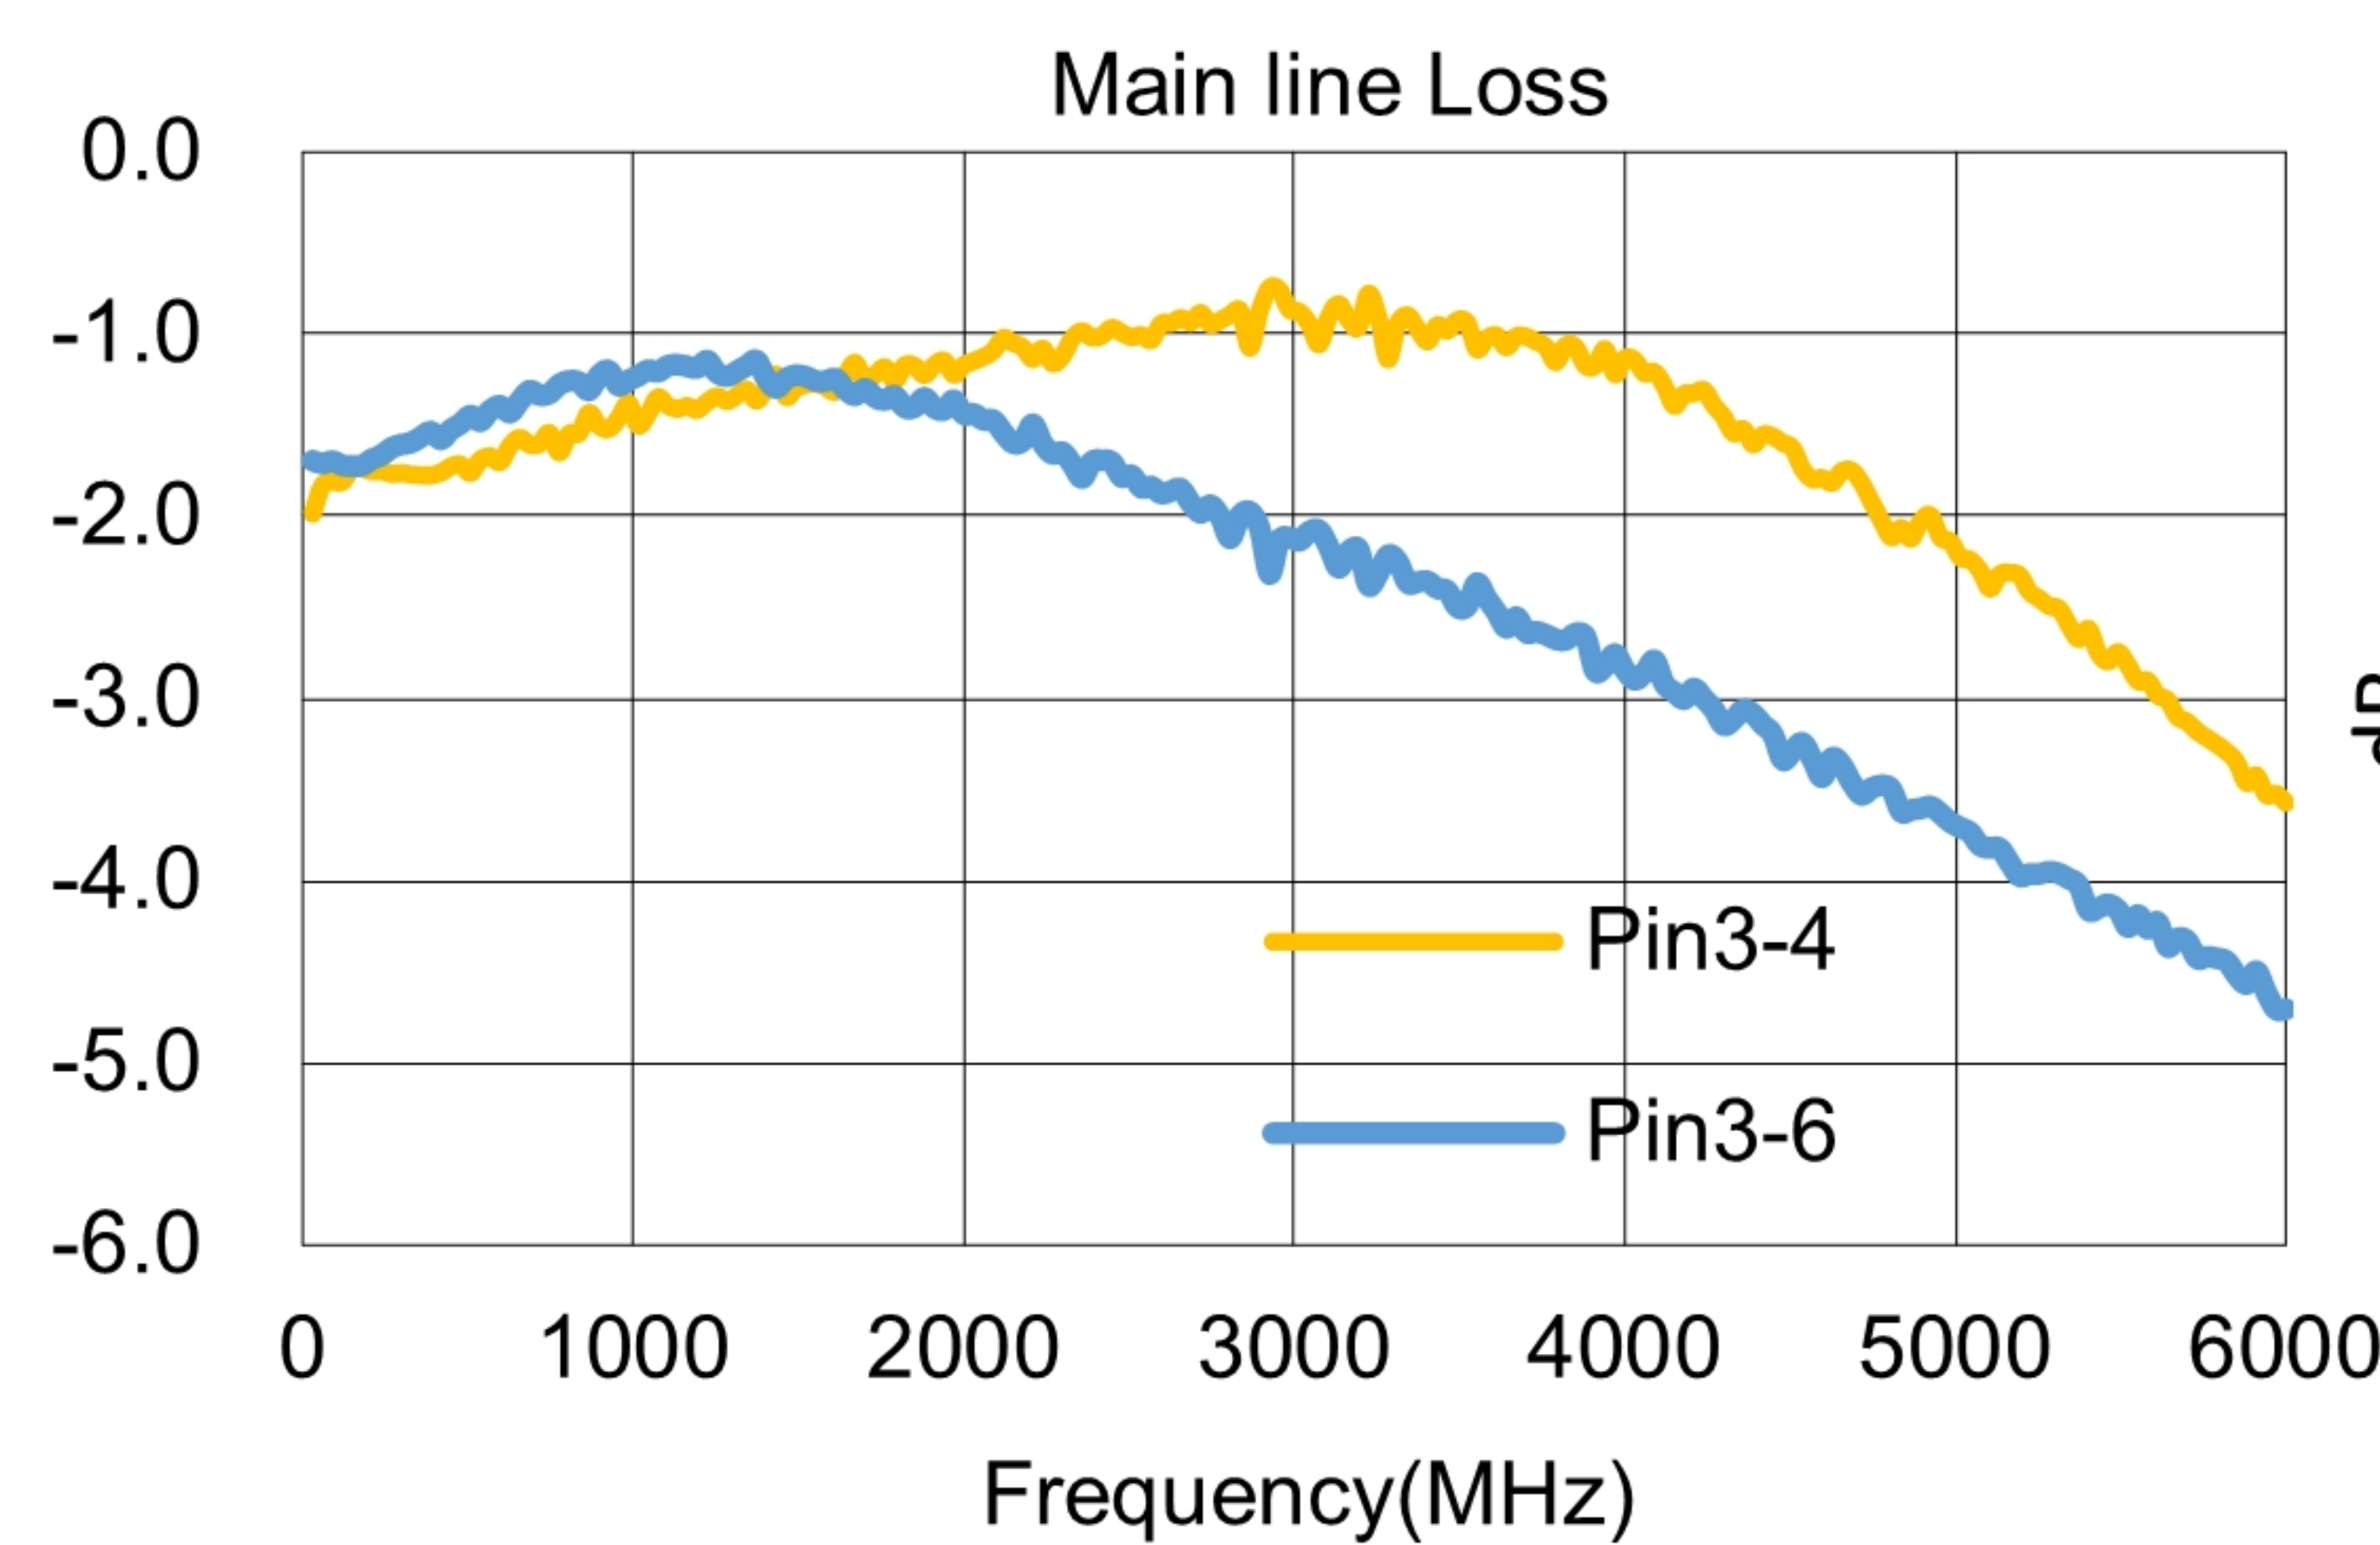

Carrier Tape Orientation

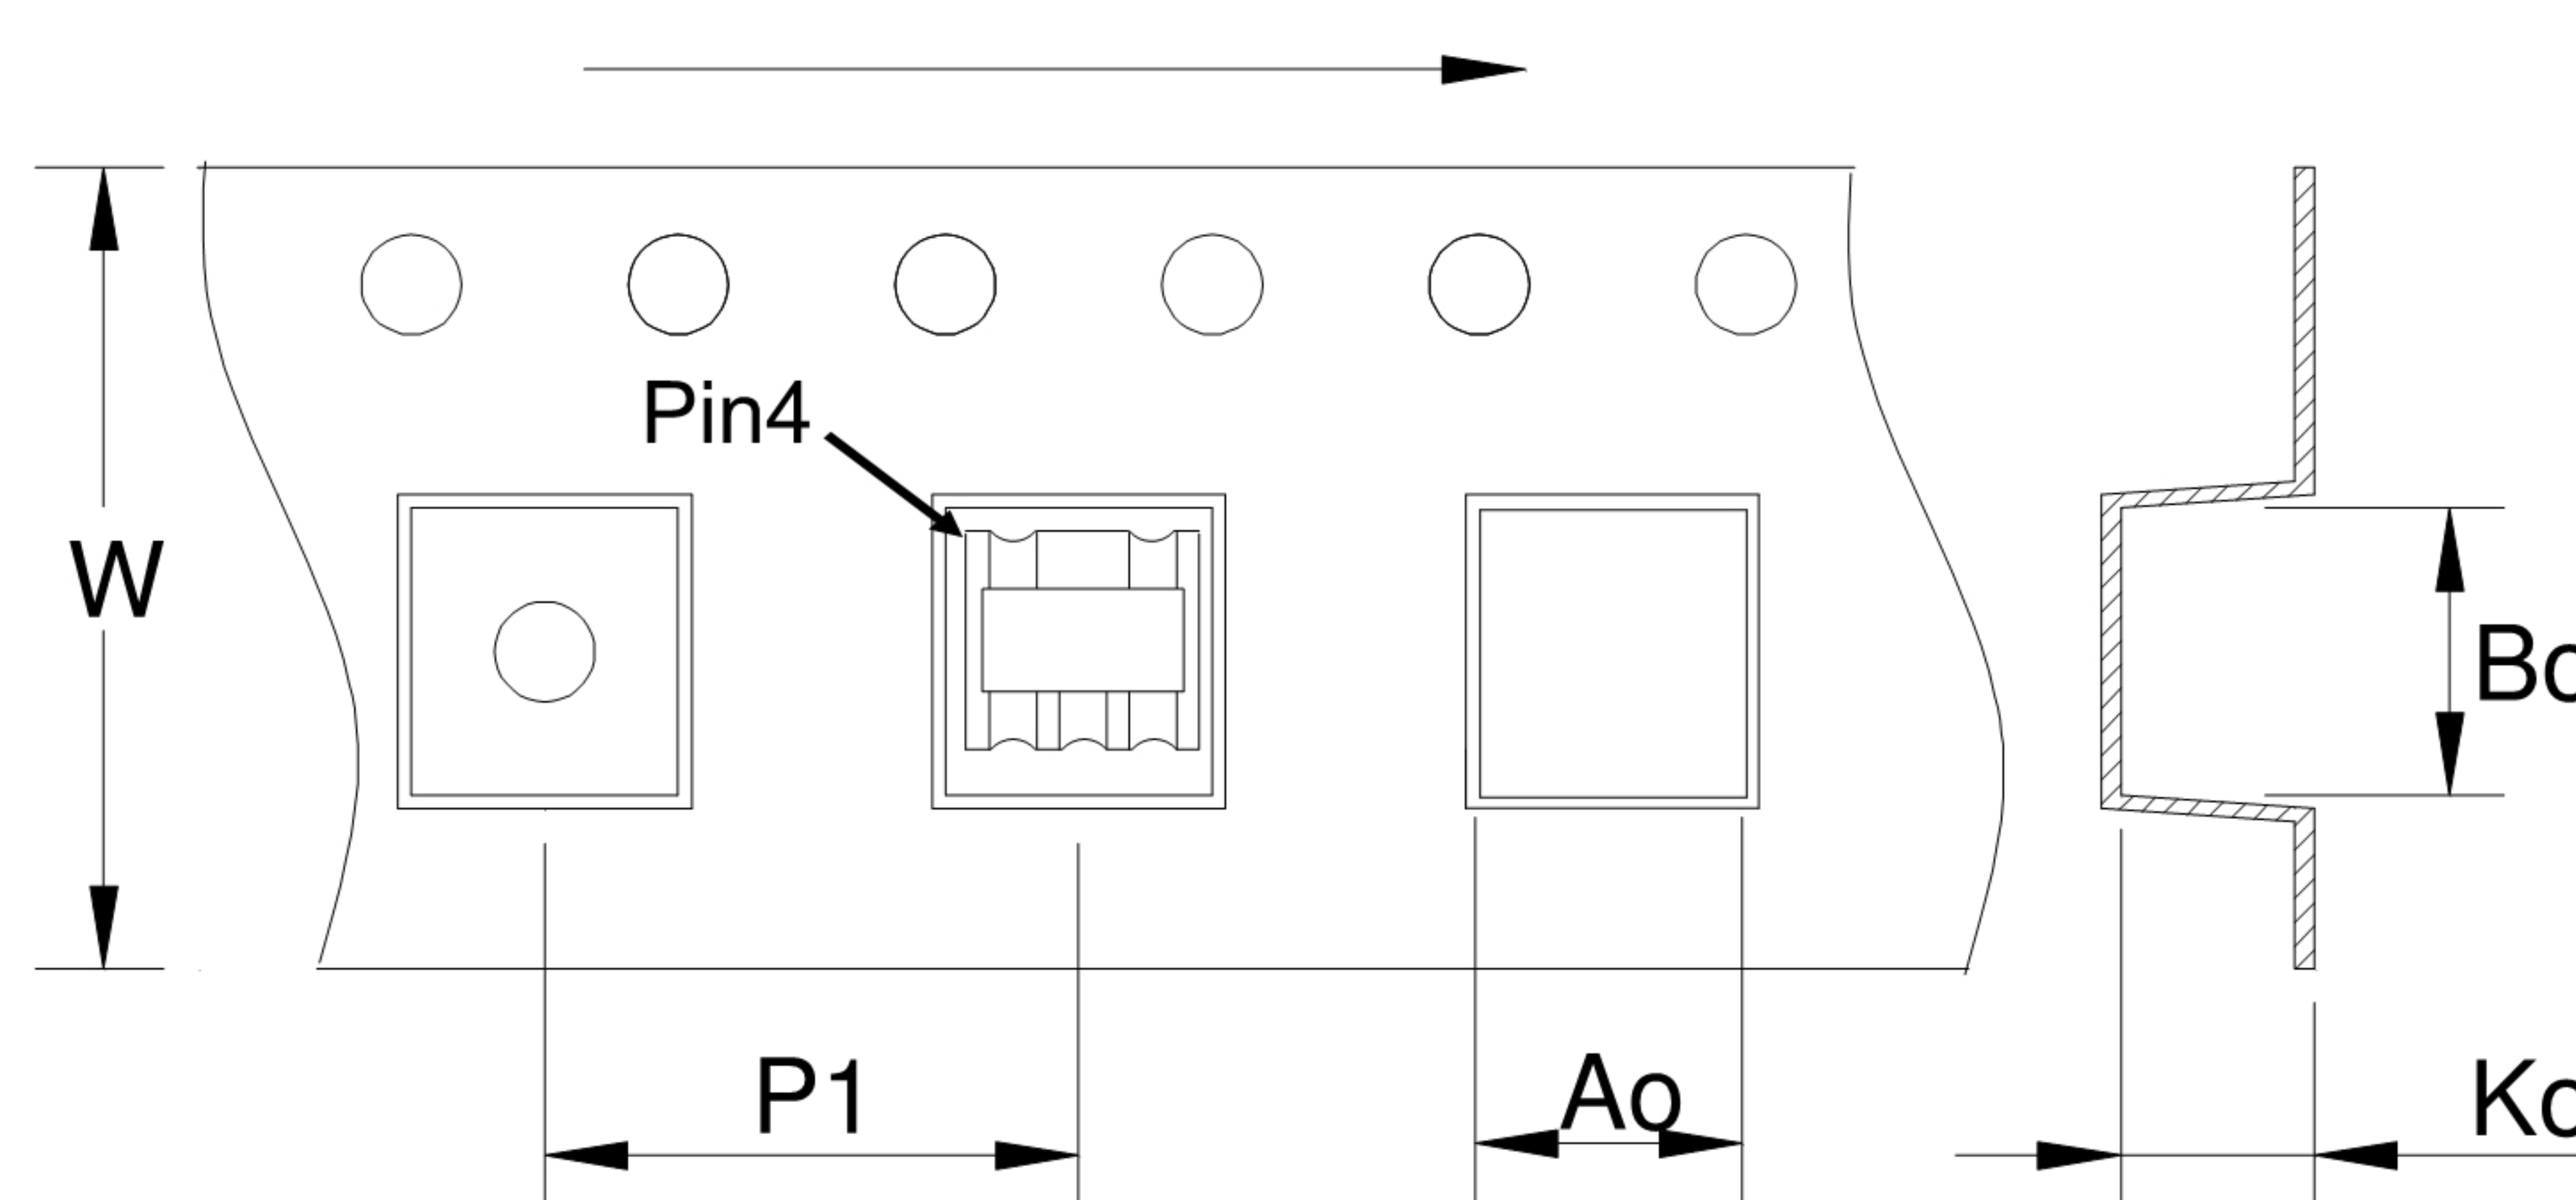

Tape & Reel Information

Parameter	Units	Value
Qty per reel	PCS	2000
Reel Size	mm	330
Tape Width	mm	12.00
Pitch	mm	8.00
Ao	mm	4.50
Bo	mm	4.50
Ko	mm	2.80