

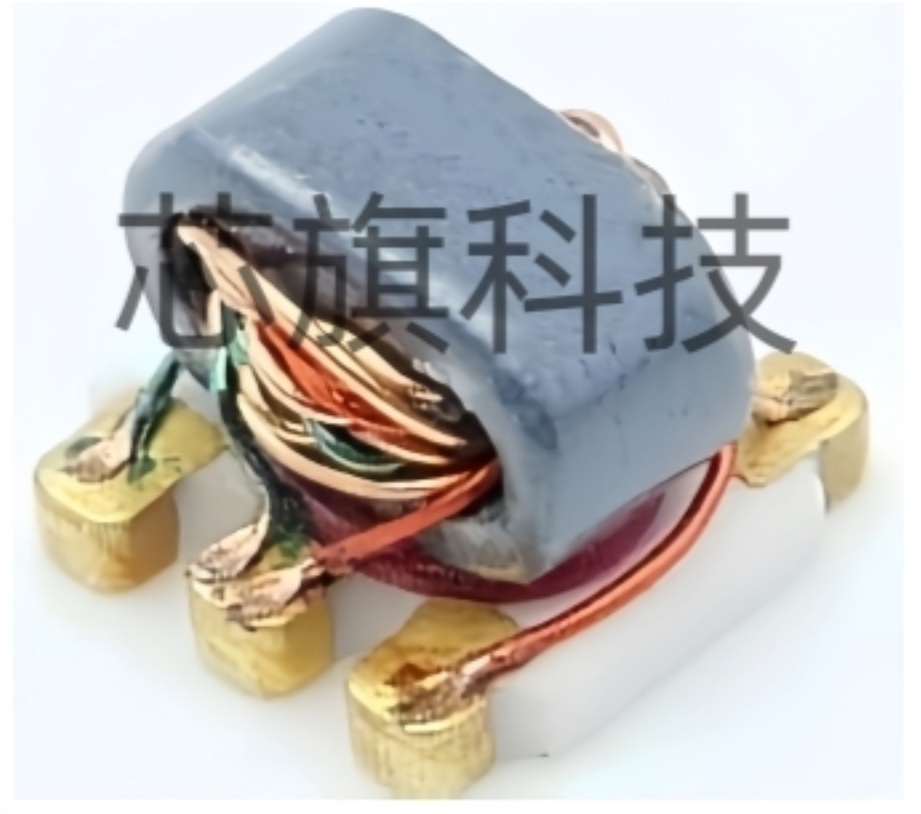


# RF Balun Transformer HTW-23713


75Ω 1:1 CT Flux Coupled Transformer 1-300 MHz

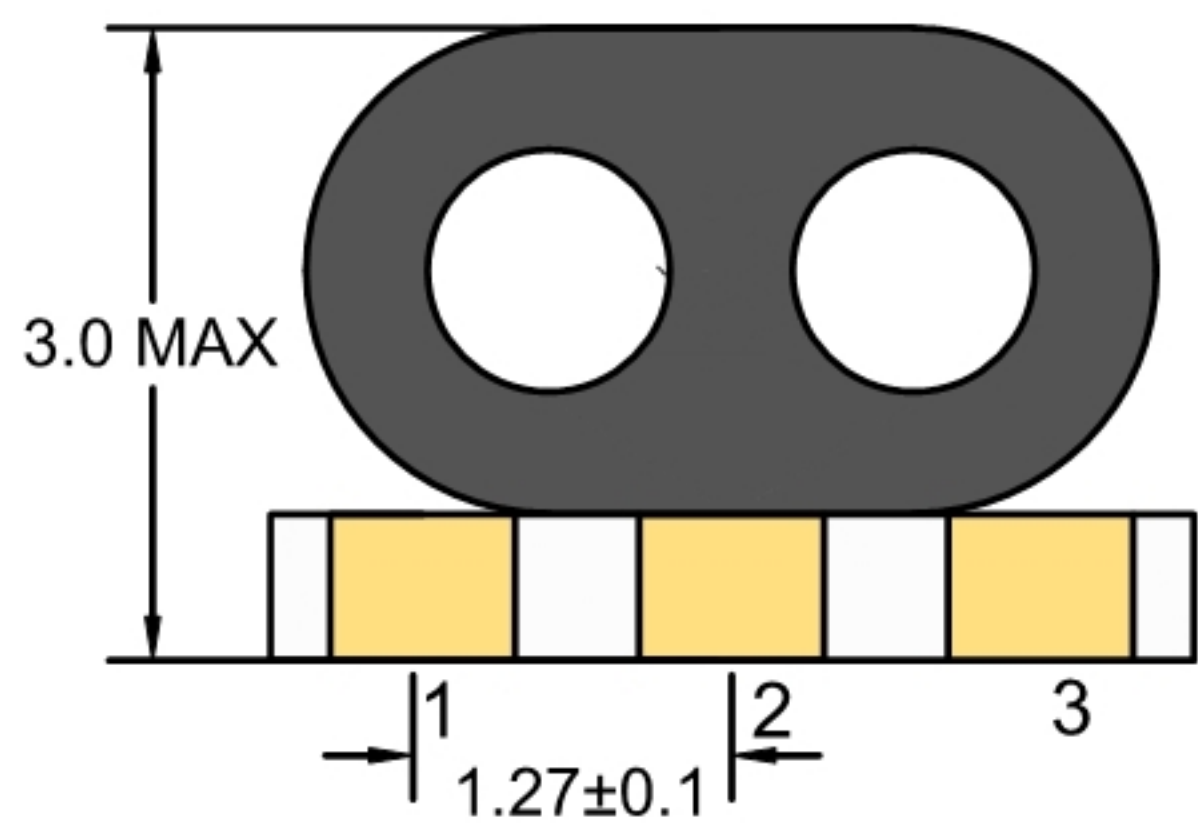


## Outline Drawing(mm)

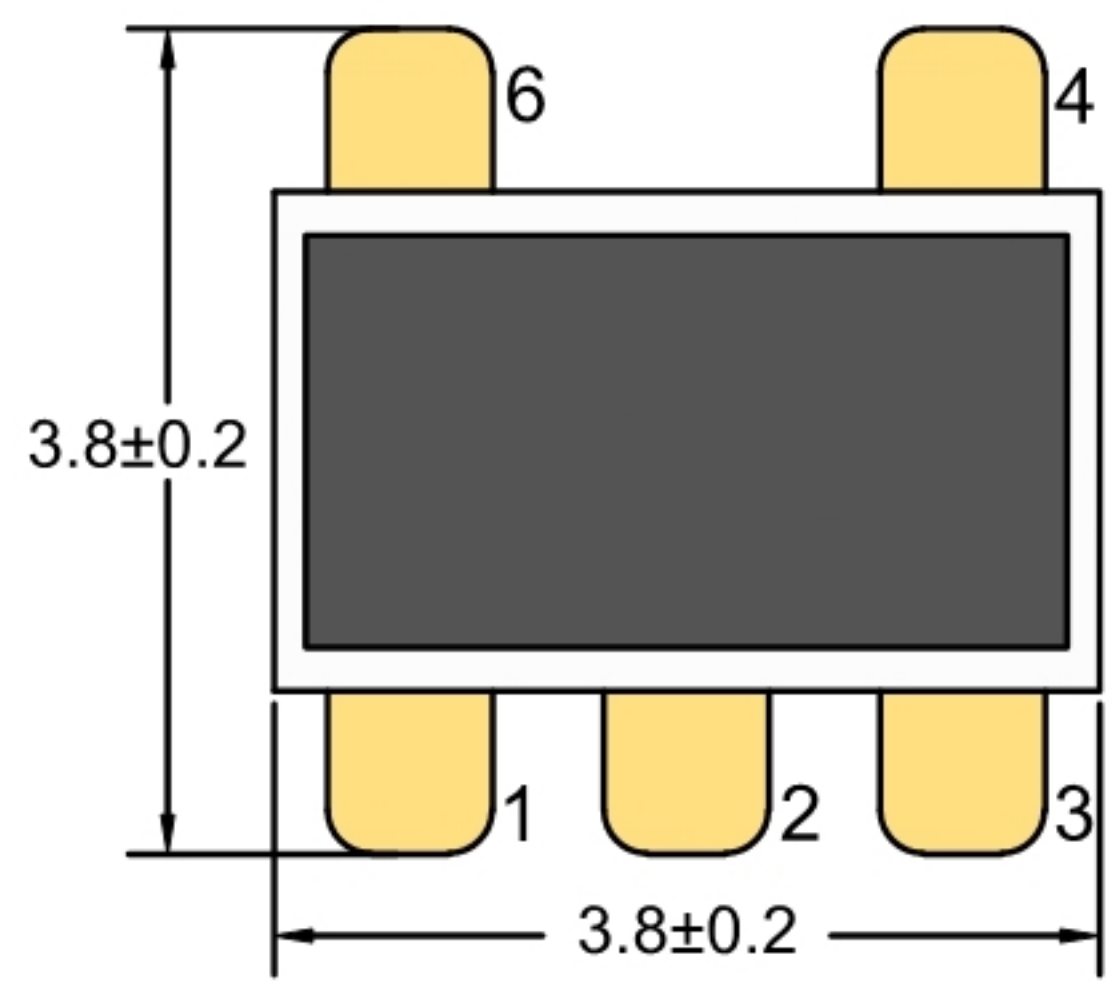

## Electrical structure

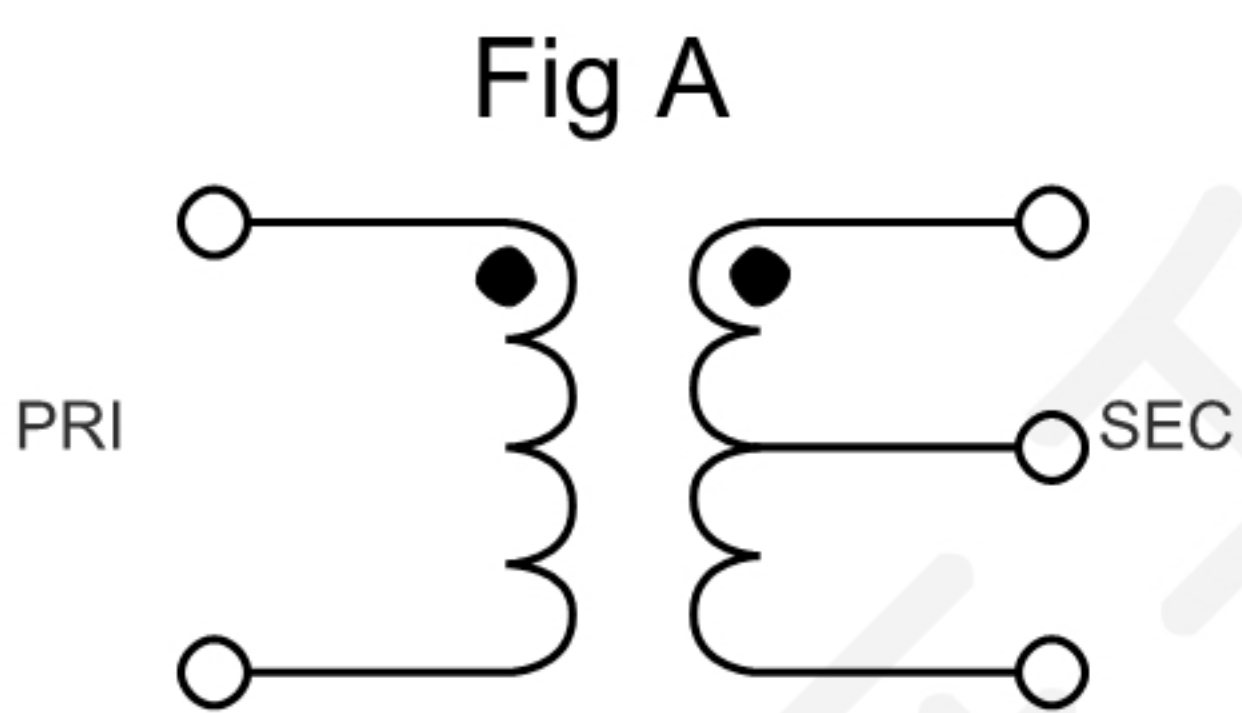

## Recommended layout(mm)

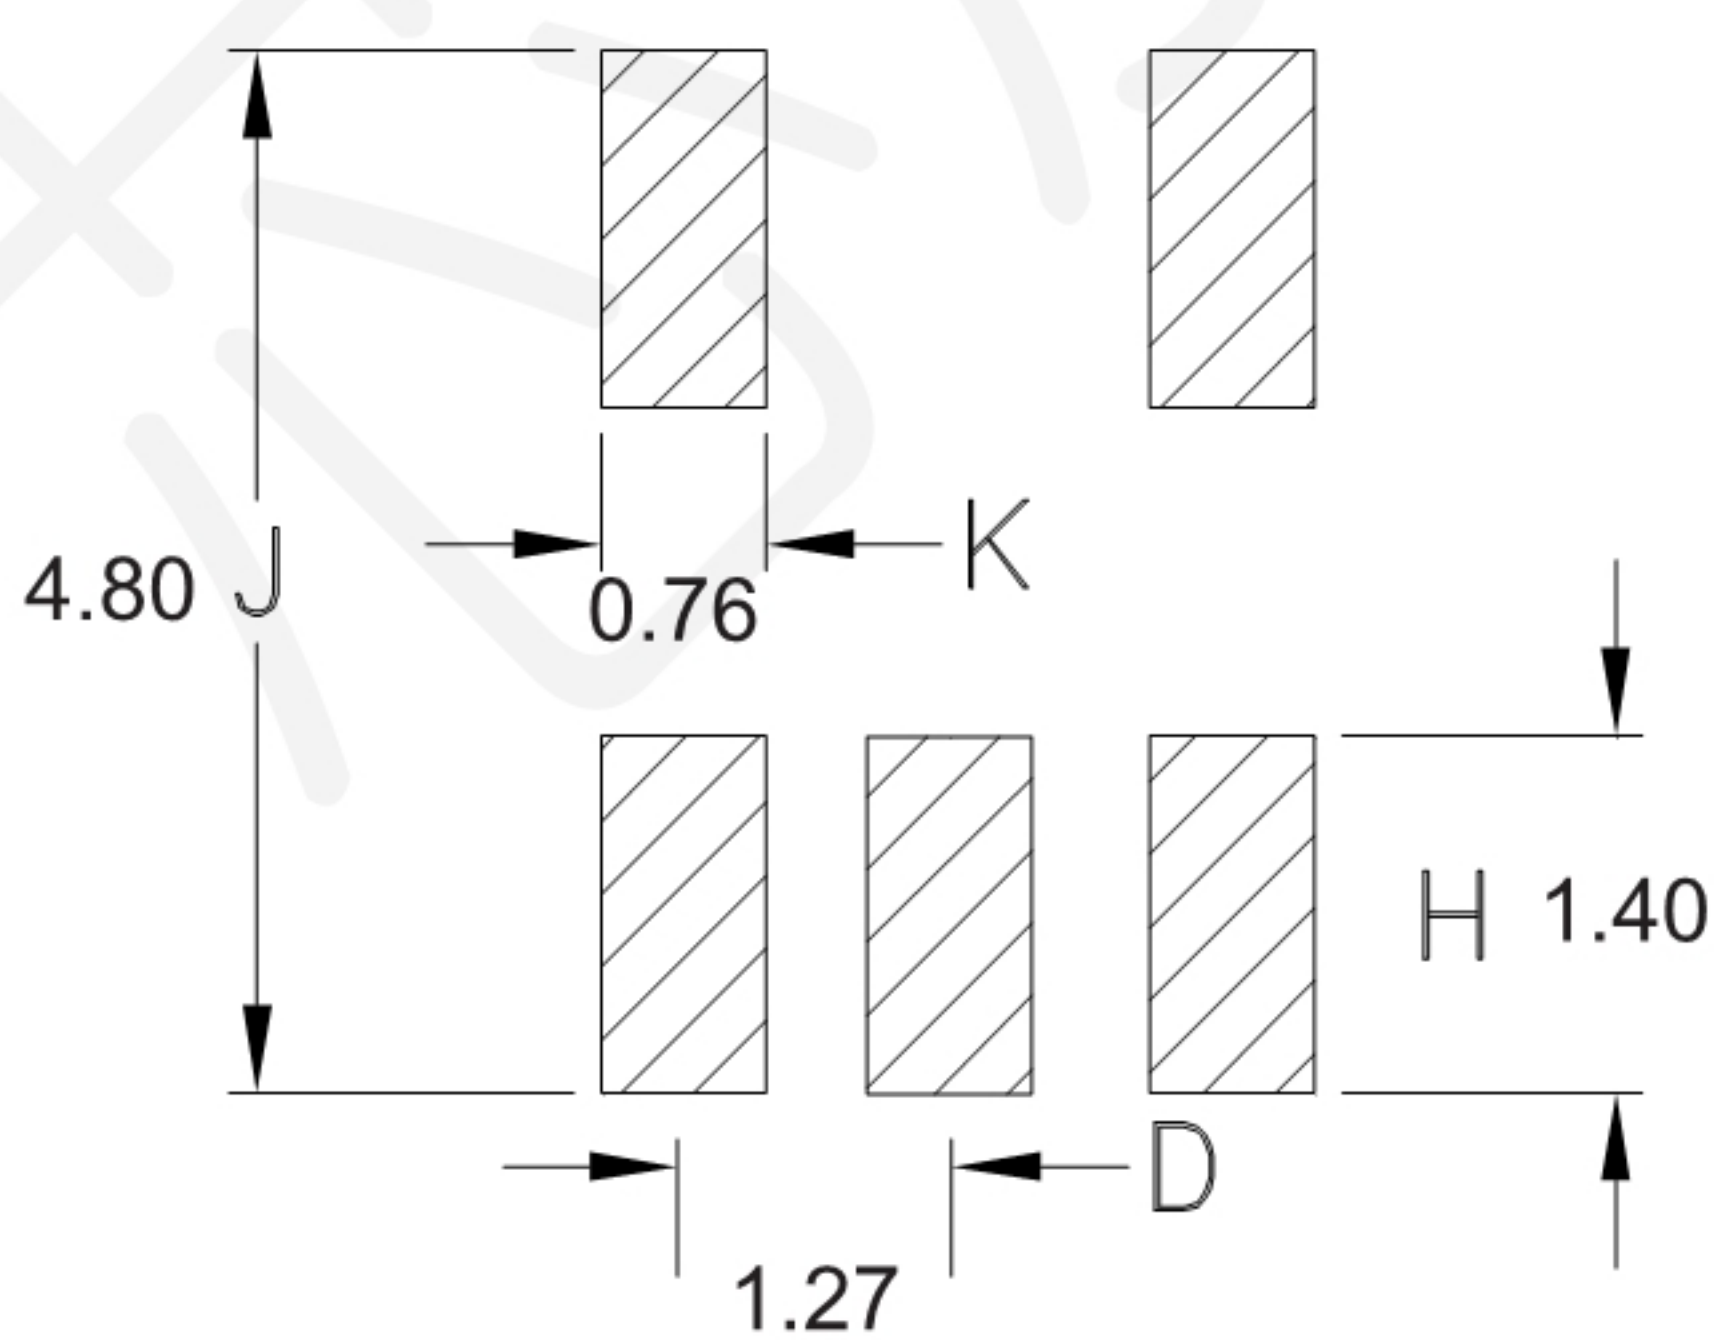

## Pin Connections

Input	4
Output 1	3
Output 2	1
Ground	6
Centre tap (Ground)	2

## Features





- RF Power, 2.0W Max
- DC current: 30mA Max
- 260°C Reflow Compatible
- RoHS compliant and lead free
- Operating temperature range: -40°C to +85°C
- Storage temperature range: -55°C to +100°C

## Applications


- For Docsis 3.0 & 3.1 Cable Modem.
- For Wideband Push-pull Amplifiers.
- For CATV Amplifiers Module & Set top box.
- For CATV Optical Receivers and Amplifiers.
- For VHF/UHF Transmitters and Push-pull Amplifiers.

## Electrical Specifications: TA=25°C, 0dBm, Z0=75Ω

Parameter	Test Conditions	Units	Min	Typ	Max
Main line Loss (Pin4-3)	1-300MHz	dB	—	0.6	1.2
Main line Loss (Pin4-1)	1-300MHz	dB	—	0.4	1.0
Amplitude Balance	1-300MHz	dB	0.0	0.4	1.2
Phase Balance	1-300MHz	°	0.0	3.0	10.0
Input Return Loss(Pin4)	1-300MHz	dB	16.0	20.0	—
CMRR	1-300MHz	dB	20.0	30.0	—

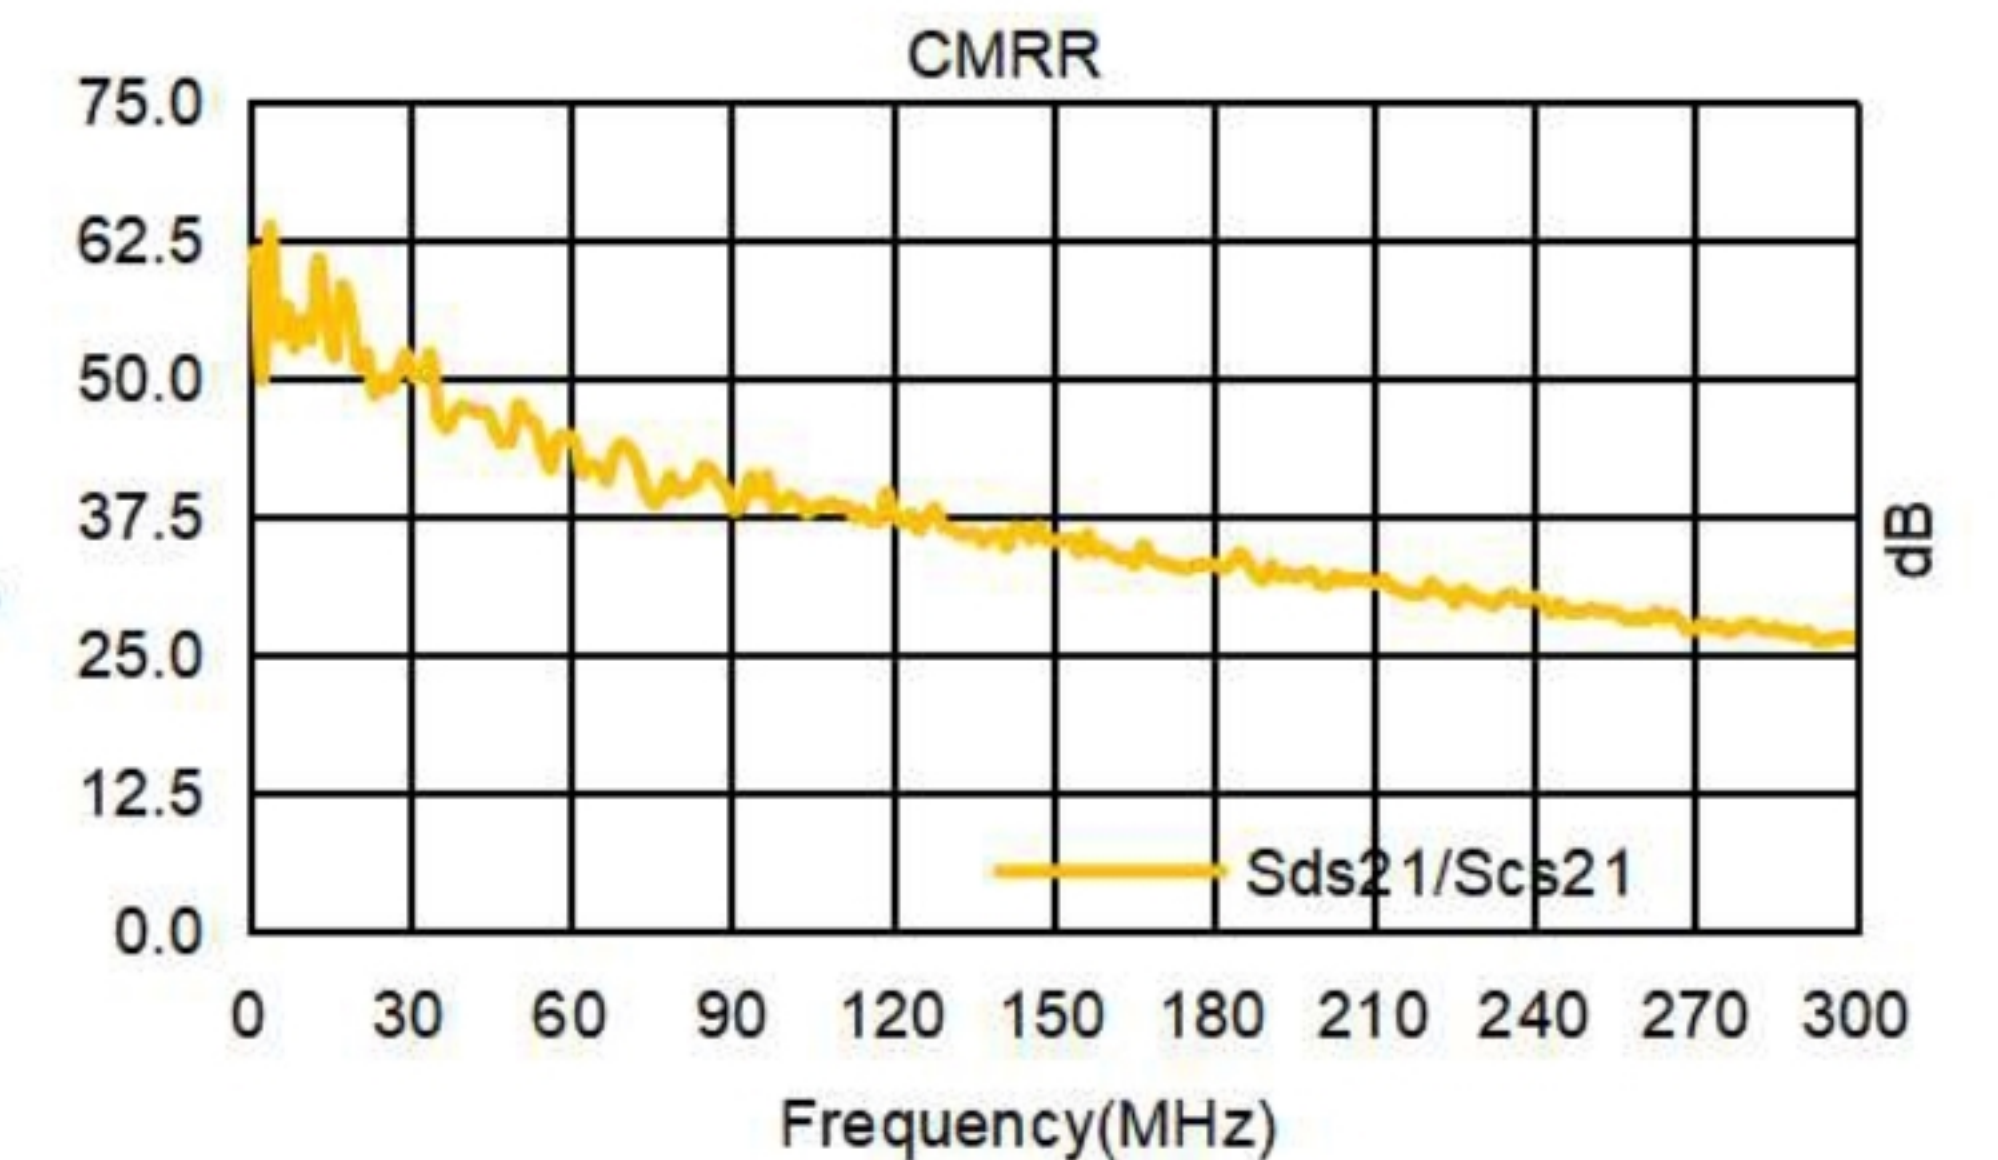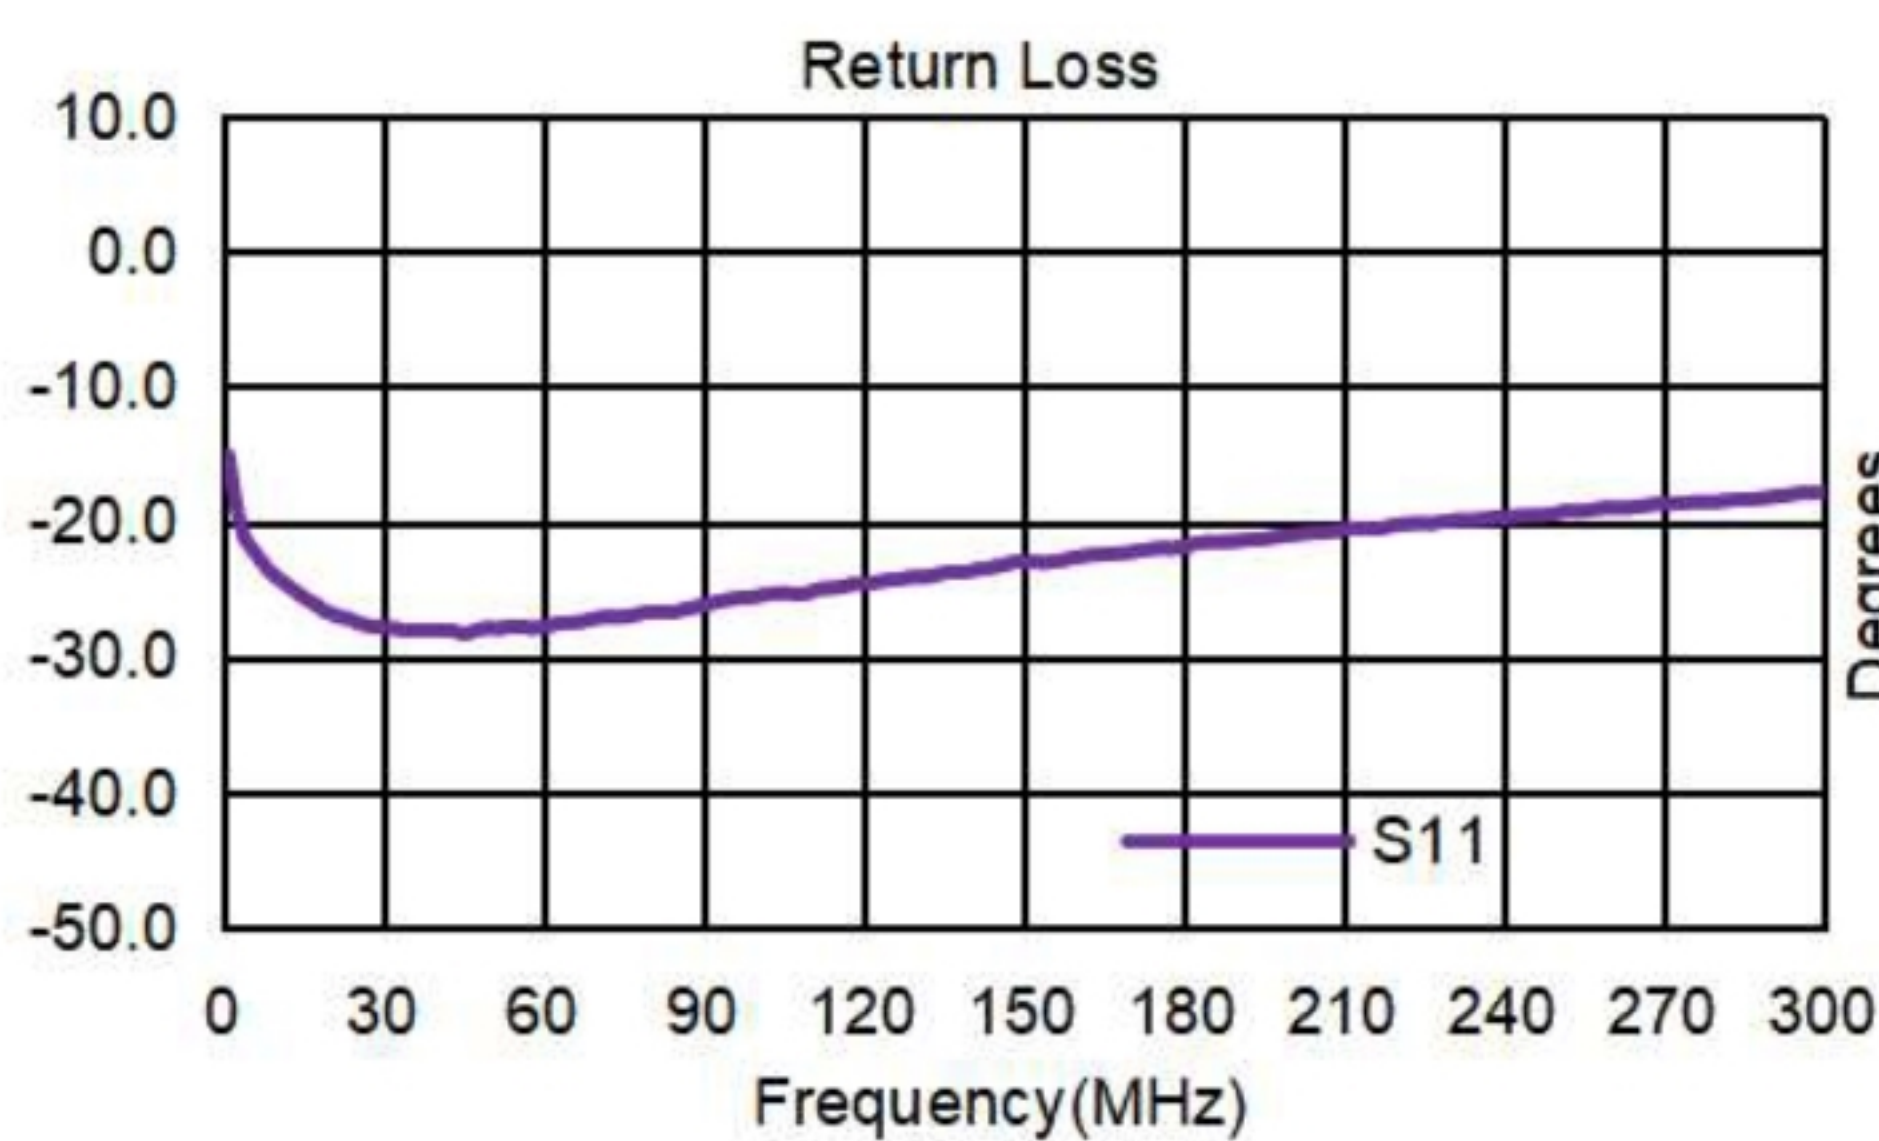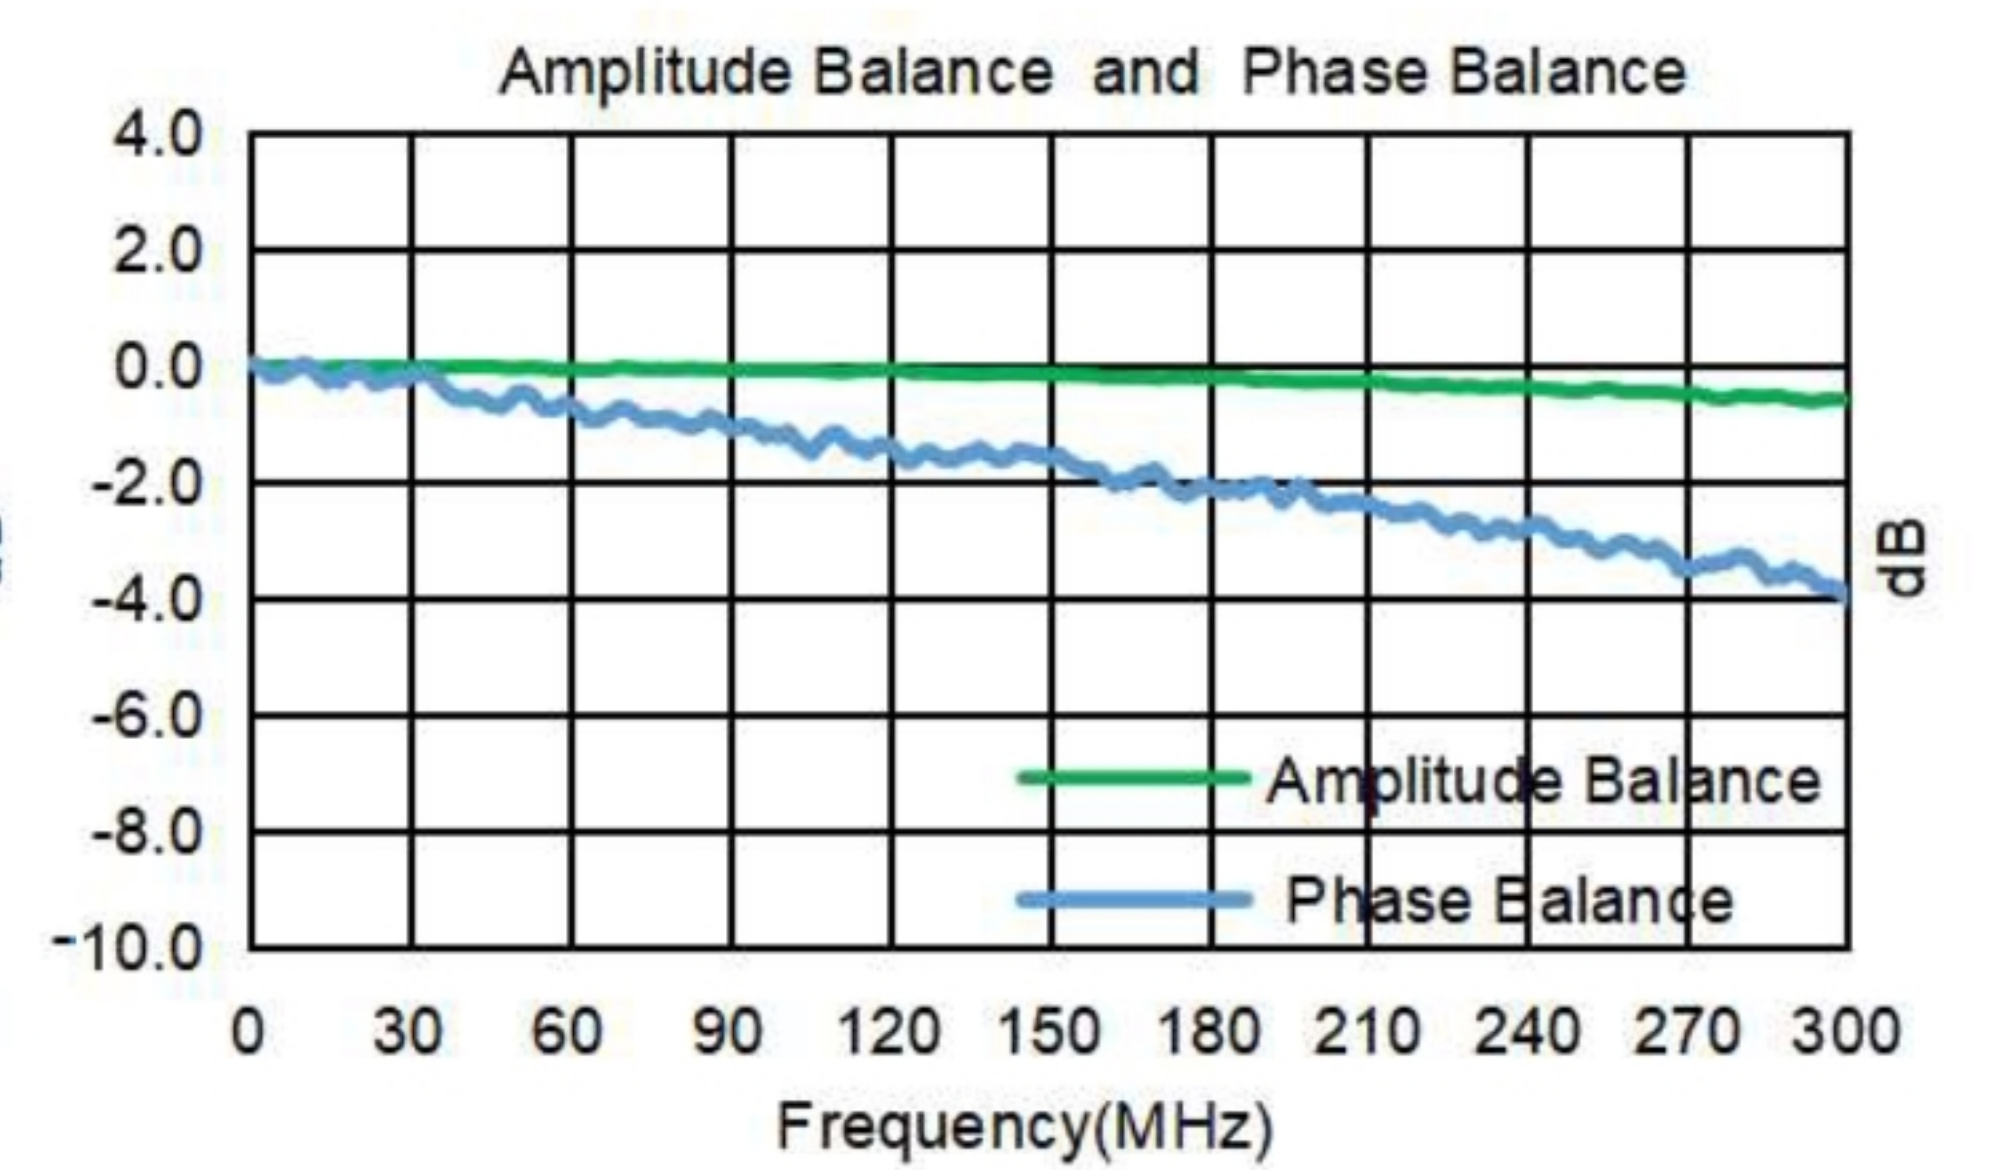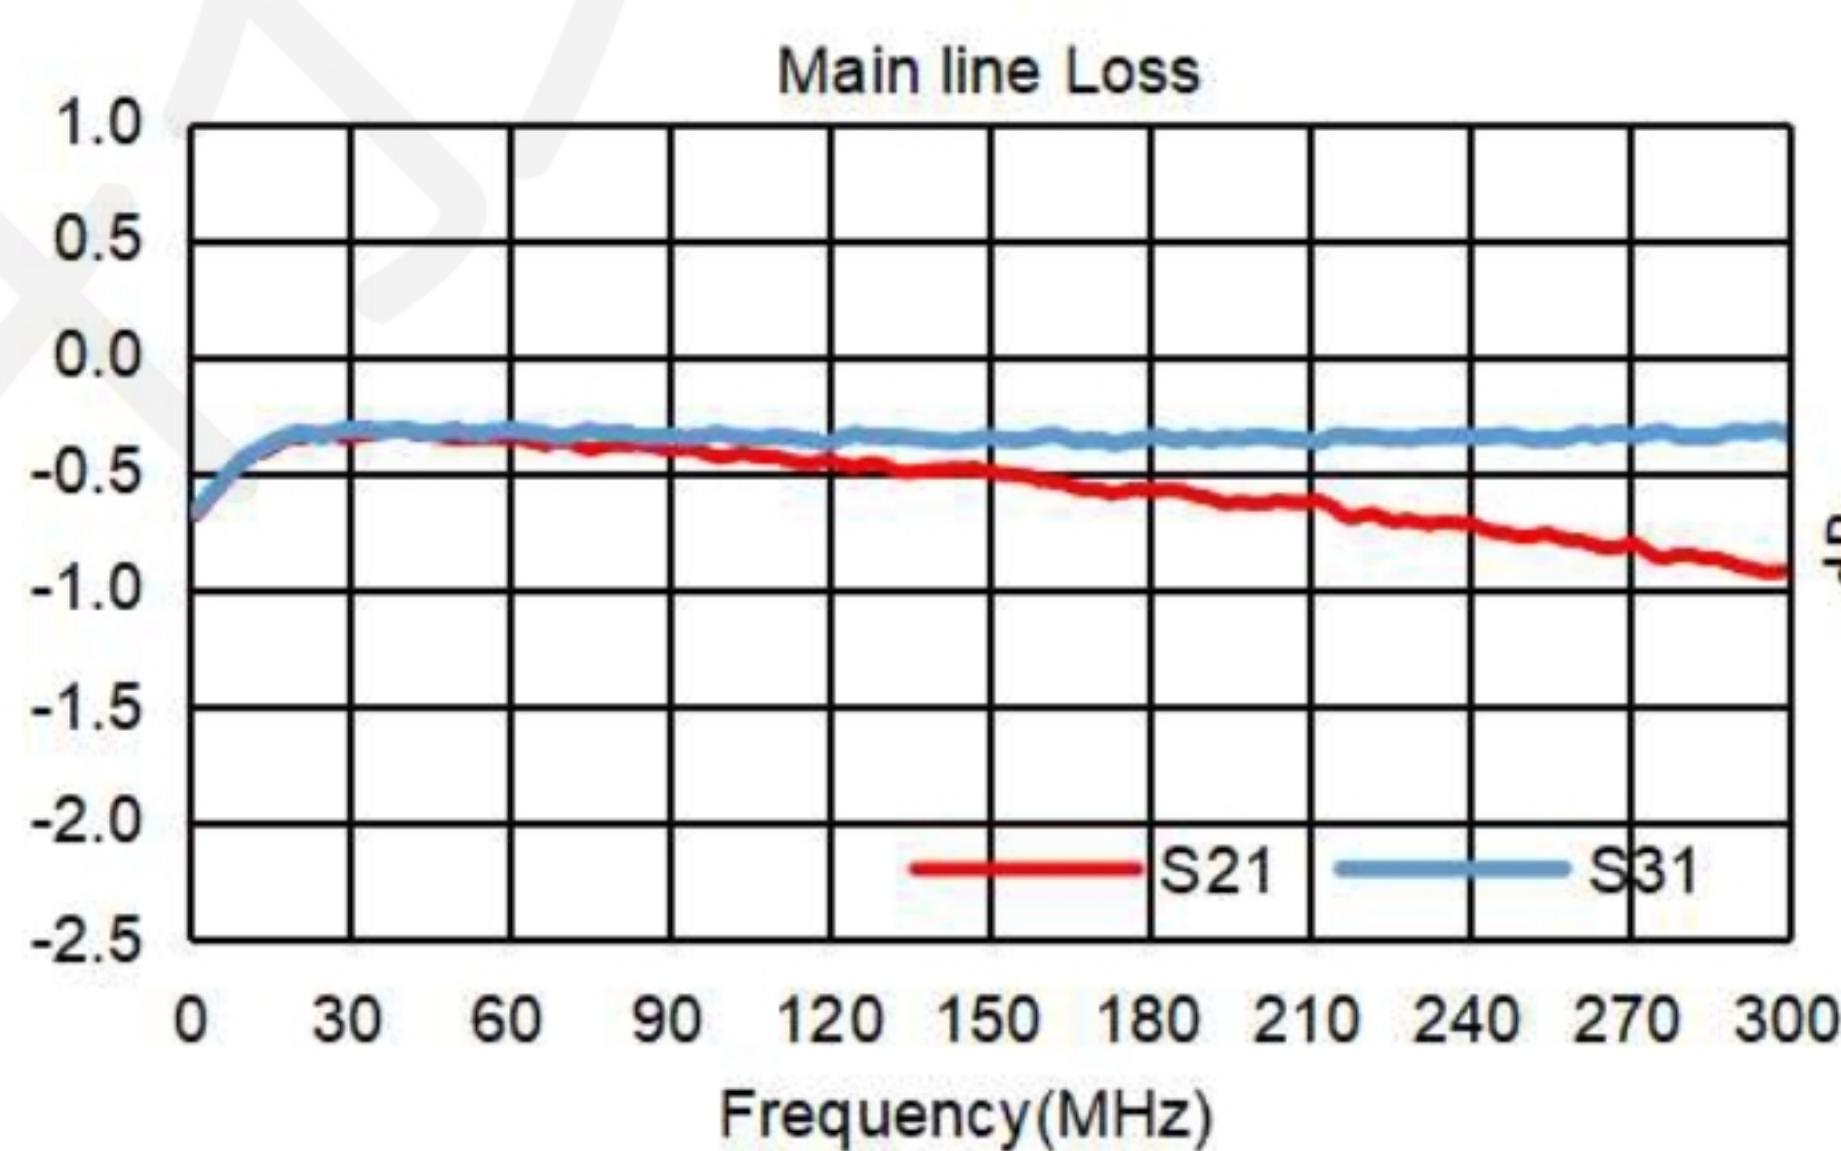

## Carrier Tape Orientation

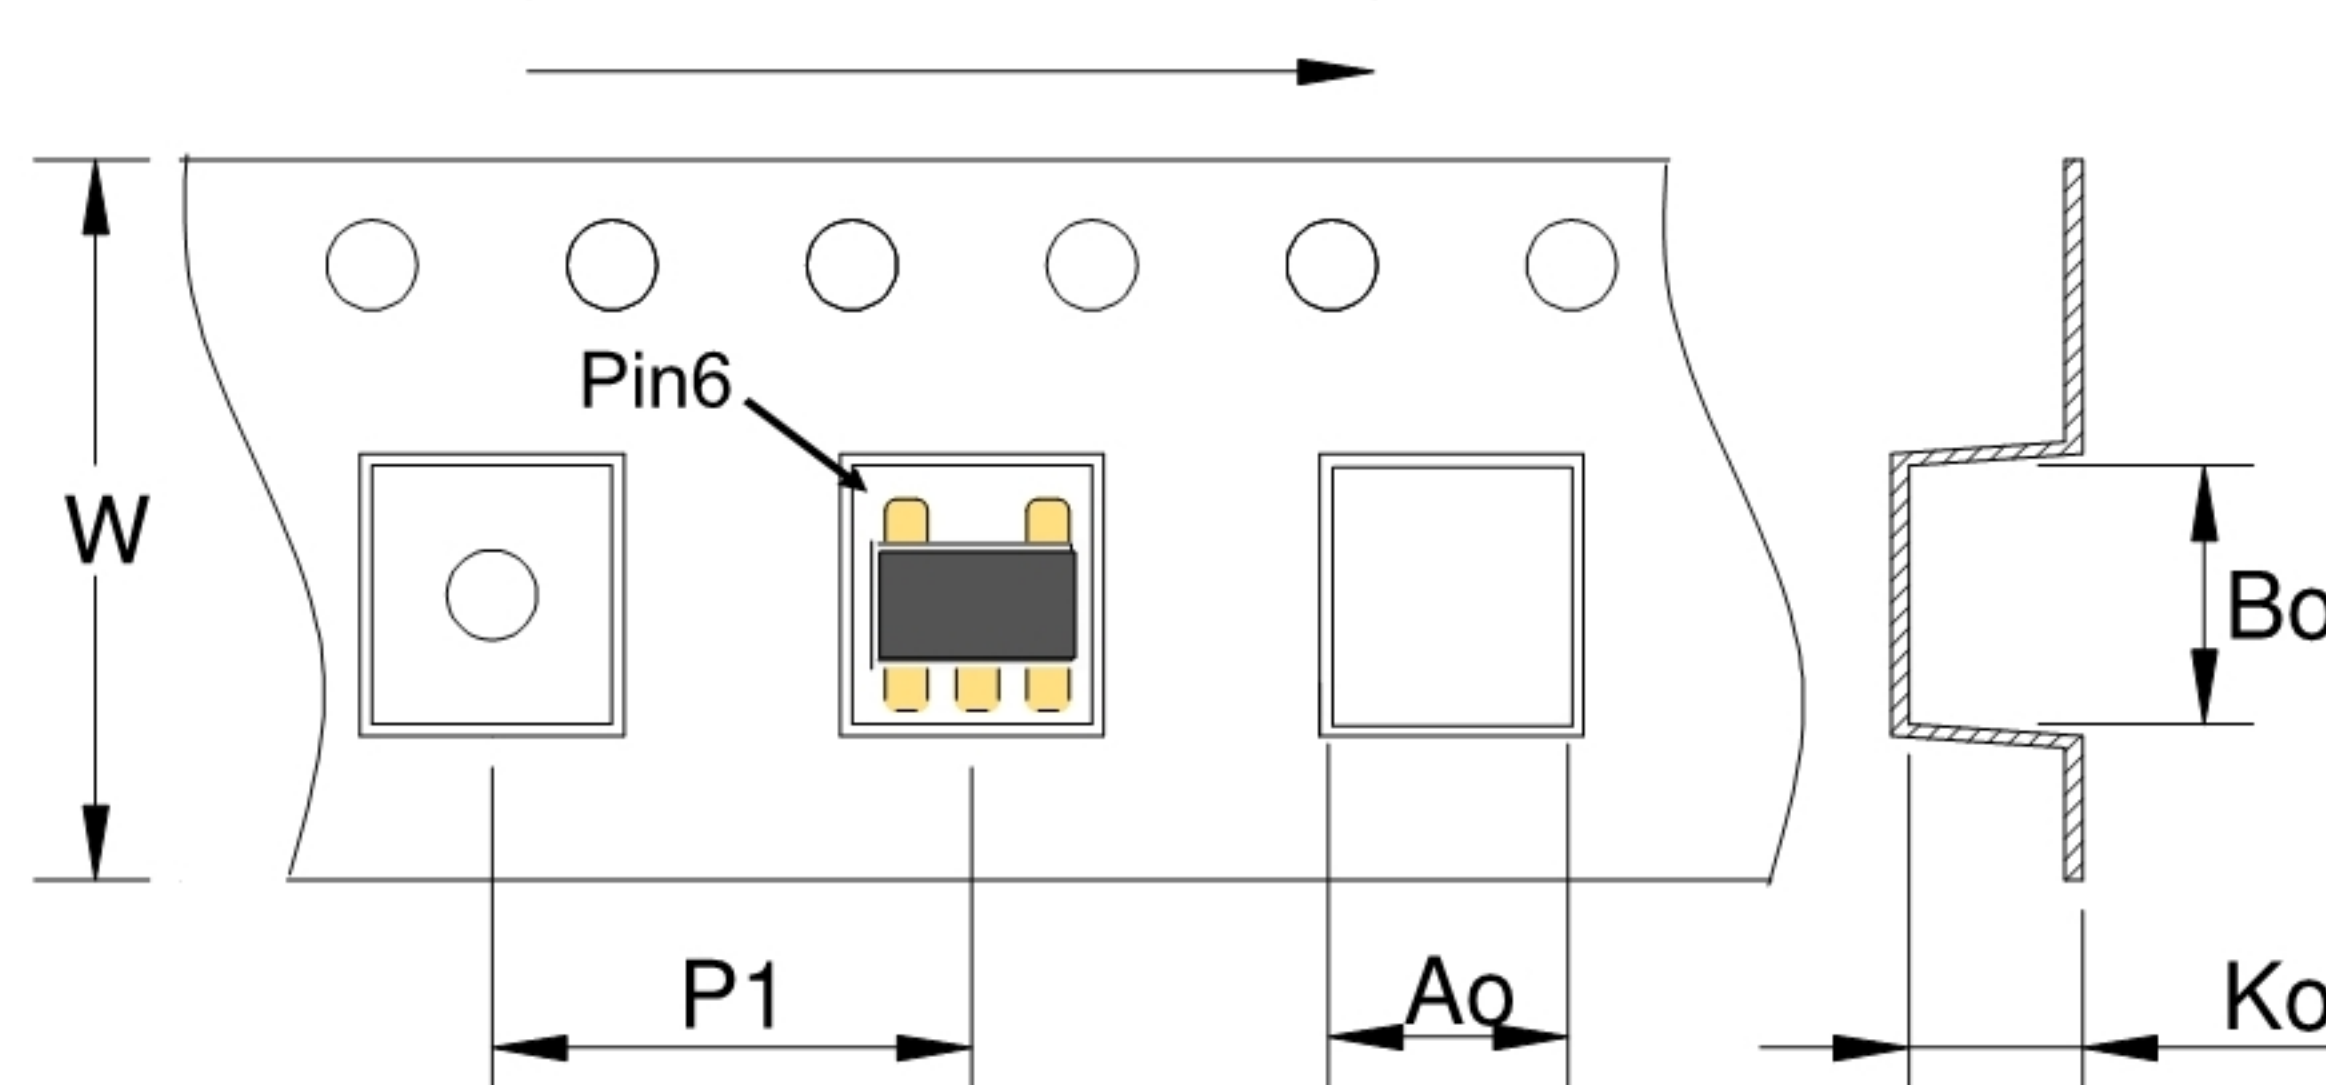

## Tape & Reel Information

Parameter	Units	Value
Qty per reel	PCS	2000
Reel Size	mm	330
Tape Width	mm	12.00
Pitch	mm	8.00
Ao	mm	4.50
Bo	mm	4.50
Ko	mm	3.50